

Product data sheet

Specifications



bus X remote rackmaster module - 2 channel - master/slave access method - 500 mA

TSXREY200

! Discontinued - Service only

! Discontinued on: Dec 2, 2020

! To be end-of-service on: Dec 31, 2026

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Premium Automation platform
Product or Component Type	Bus X remote rackmaster module
Number of channels	2

Complementary

Method of access	Master/slave
Electrical connection	1 connector SUB-D 9 1 connector SUB-D 9 for the connection of channel 1
Local signalling	1 LED for channel 0 operating (CH0) 1 LED for channel 1 operating (CH1) 1 LED for external fault (I/O) 1 LED for internal fault, module failure (ERR) 1 LED for module acting as master or slave (MS) 1 LED for module running (R)
Current consumption	500 mA 5 V DC
Module format	Standard

Ordering and shipping details

Category	US1PC2222558
Discount Schedule	PC22
GTIN	3595860019097
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.2 in (5.5 cm)
Package 1 Width	7.09 in (18.0 cm)
Package 1 Length	10.2 in (26.0 cm)
Package weight(Lbs)	15.0 oz (425.0 g)

Contractual warranty

Warranty (in months)	18
----------------------	----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

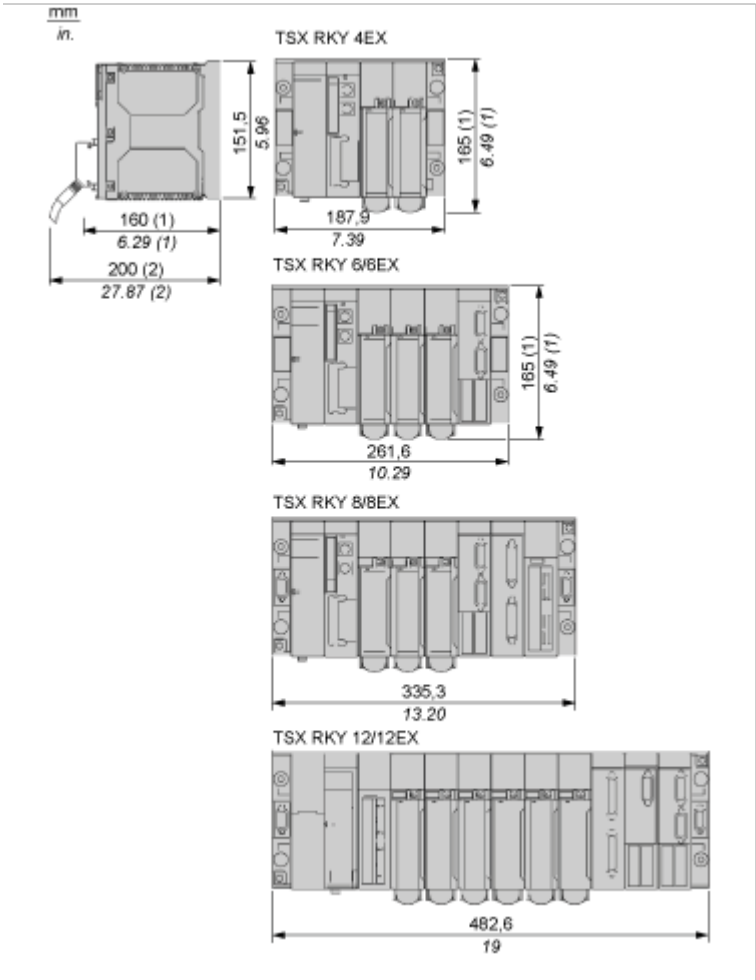


- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Connections and Schema

Bus X Remote Rackmaster Module

Connecting Accessories

Installing a bus X extension requires the following elements:

1 TSXCBRY2500 kit including 1 cable, 250 m/820 ft long, supplied on a reel.	
1 set of 5 connectors TSXCBRYK5, which allows you to fit 2 extension cables, leaving you with one connector as a spare.	