


TO INSTALL OPTIONAL REMOTE POWER MONITOR DISPLAY (P/N 40299)

1. Location for the optional remote power monitor display should be determined by where it is most convenient to view the display. This remote power monitor allows for continuous visual indication of source voltage and load current or diagnostics. A 50 ft. RJ12 connector cable (p/n 40258) is sold separately and would allow for installation virtually anywhere inside the RV. It may also be installed in the same location as the Surge Guard* Transfer Switch. Mounting is not necessary, leave enough cable length for accessibility, balance of cable can be bundled with a plastic tiewrap. Should a remote location be desired, route cable through the coach as needed (cable ends and remote display must be located in a dry interior location away from inclement weather and moisture).
2. Suggested mounting procedure for optional Remote Power Monitor:
 - A. Remove cover (do not allow for foreign matter to fall into open box) using the open box as a template, mark outline on mounting surface. Outline as follows:

**NOTE: Lay box on its side to position "notch" for flat cable connection. Do not exceed dimensions shown or cover plate, when installed, will not cover cable "notch".
 - B. Position box, with cable installed, secure with appropriate screws (not supplied). Attach the cover plate on mounting surface. Outline as follows:

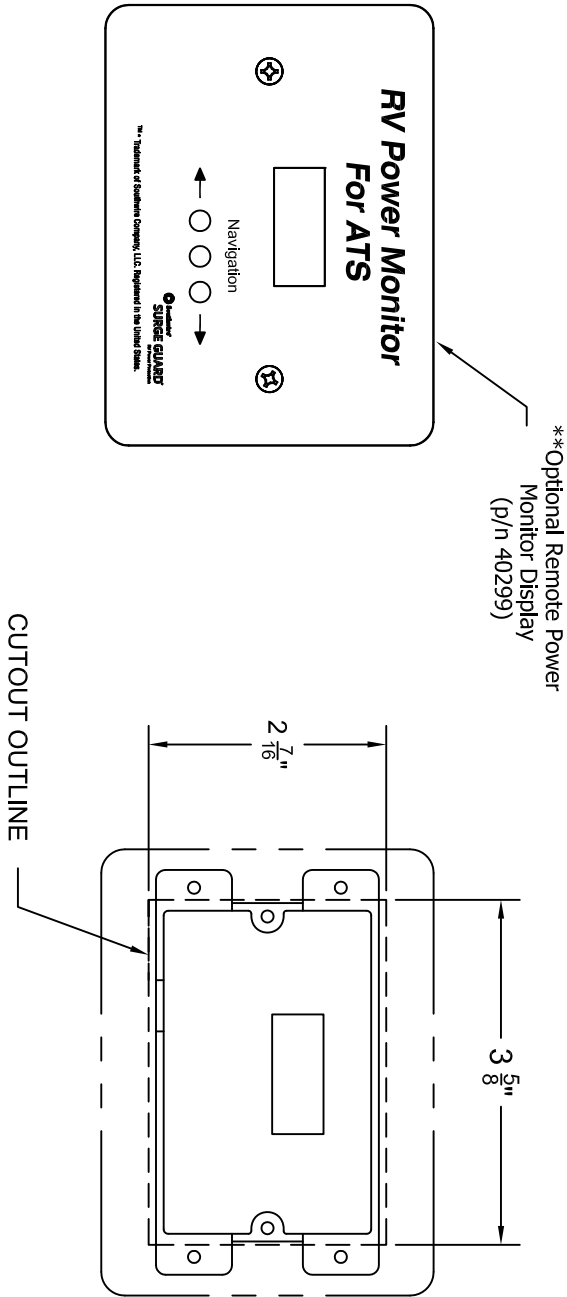

Installation Test Procedures

1. Plug RV's shore power cord into utility power source.
2. Wait for time delay, then observe remote display of shore power status***.
3. Turn on RV's generator (generator power source is dominant over shore power). A 30 second delay will occur.
4. Observe remote display for generator output status (Volts/Amps).
5. Switch off generator, observe remote display of transfer "Delay Active-Shore Power".
6. Shore Power activated, observe remote display (Volts/Amps). ***Acceptable shore and/or generator power range is 100-135 Volts. Load (Amperes) 0-50 Amps.

NOTE: During generator (only) power-up, the monitor display will be blank for approximately 30 seconds for generator warm-up.

rvpower.southwire.com

For technical assistance, please call 1-800-780-4324 x 20311

Manufactured by Southwire Company, LLC, 11211 69th St. N, Largo, Florida 33773
© 2018 Southwire Company, LLC. All rights reserved. *Trademark of Southwire Company, LLC. Registered in the United States.

505-00764-4A


INSTALLATION & OPERATING INSTRUCTIONS

Model 40450RVC 120/240V, 50A, 60 Hz

FOR YOUR RECORDS
MODEL NO: _____
DATE PURCHASED: _____
DATE INSTALLED: _____
INSTALLED BY: _____

Open type device. Intended to be installed inside RV's control panel enclosure.
The generator needs to be manually shut-off in order for the transfer to shore power to be completed.

The Surge Guard* unit should be mounted on a dry interior surface that is protected from inclement weather. The Surge Guard unit must have accessibility to incoming shore power source, generator power cable and outgoing coach main load cable. Southwire does not recommend installing the Surge Guard* unit under the bed or anywhere in the living area.

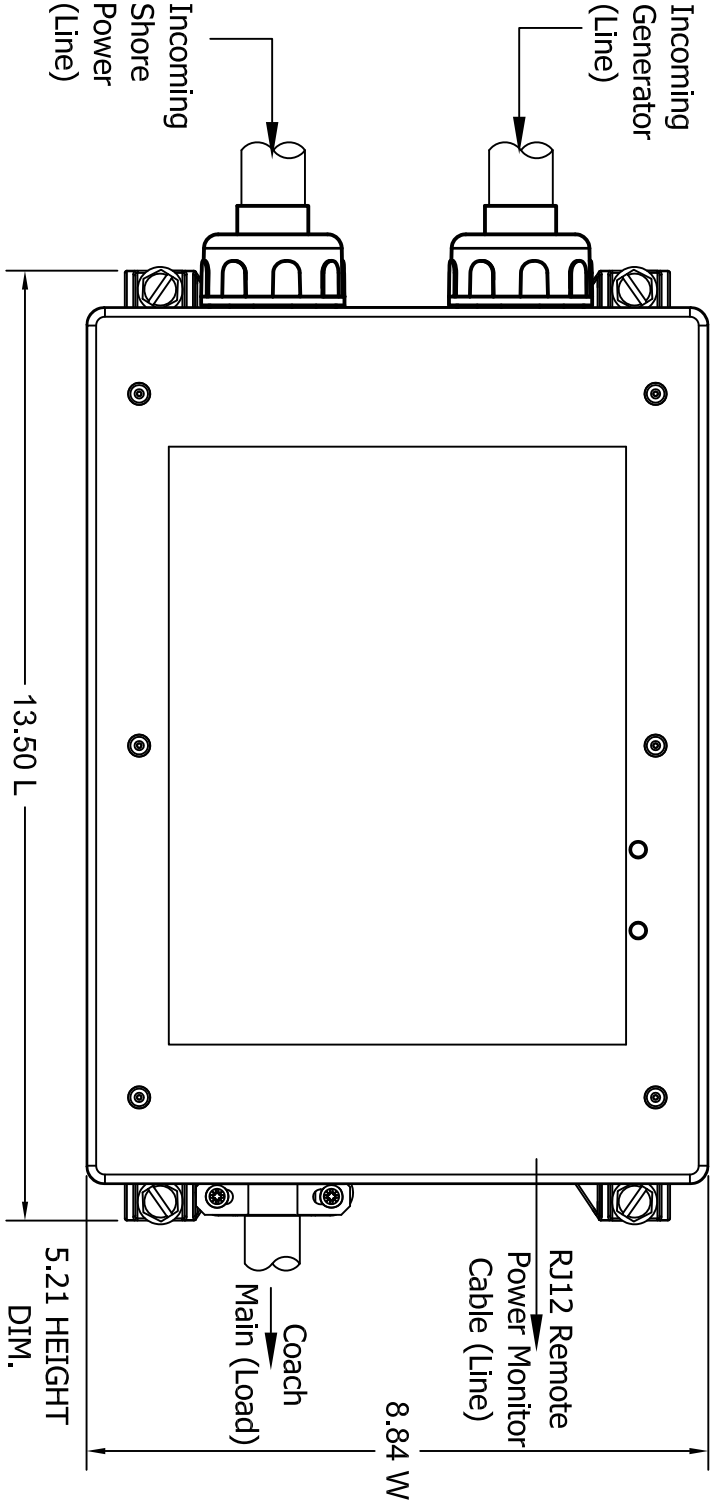


Transfer Switch is provided with the following strain relief connectors:

Recommended mounting screws (not included):

- 2 Each, Size 1 1/4 in.
- 1 Each, Size 3/4 in.
- Remote Power Monitor Display (p/n 40299) (Optional)
- (50 ft.) RJ12 Cable Assembly(p/n 40258)(sold separately)
- 4 Pcs. 1/4 X 3/4 (Self Tapping)

Southwire®
SURGE GUARD*
RV Power Protection

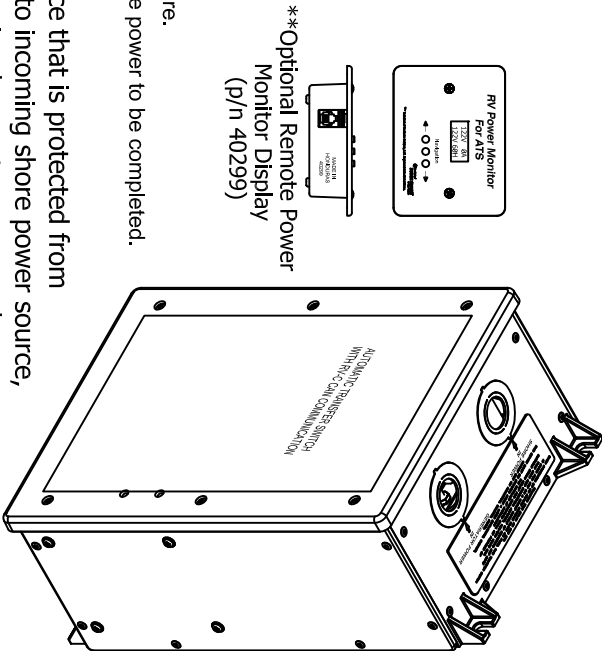


**Optional Remote Power Monitor Display (p/n 40299)

505-00764-1A

WARNING: This Surge Guard* device must be installed by a licensed electrician or by an RV dealer.
UNIT MUST BE ACCESSIBLE FOR FUTURE SERVICING IF REQUIRED.
RECOMMENDED LOCATION POSITIONS ARE AS FOLLOWS:

FIRST-UNIT COVER FACING UP SECOND-UNIT VERTICAL OR PERPENDICULAR
AND HORIZONTAL TO THE HORIZONTAL

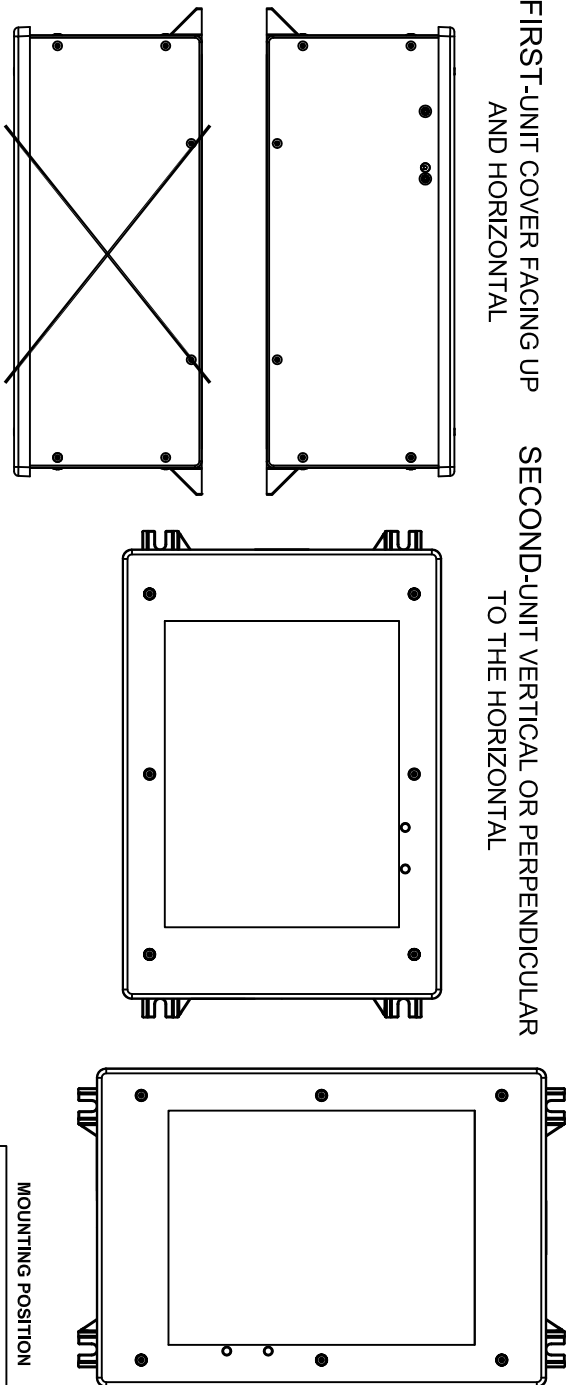



**DO NOT INSTALL UPSIDE DOWN WITH COVER
FACING DOWN TOWARDS THE EARTH.**

**DE-ENERGIZE / DISCONNECT INCOMING SHORE
AND GENERATOR POWER BEFORE PROCEEDING.**


SUGGESTED INSTALLATION PROCEDURE.

1. Remove cover.
2. For alternate cable sizes, select appropriate size connectors to fit cables to be installed.
3. Select corresponding "Knockouts" on ends of unit, install and tighten in place.
4. Tighten connector jam nut with cable clamping screws positioned for easy access during cable assembly. Unscrew clamping screws to allow for maximum cable opening.
5. Prepare cable:
 - A. Line Side (INPUT)

MOUNTING POSITION			
GRAVITY ↓	WALL	YES	YES
GRAVITY ↓	WALL	YES	YES
GRAVITY ↓	WALL/FLOOR	YES	YES
GRAVITY ↓	CEILING	NO	NO

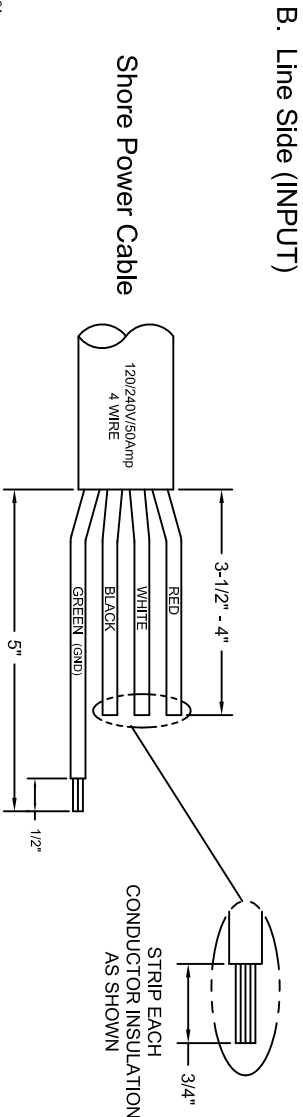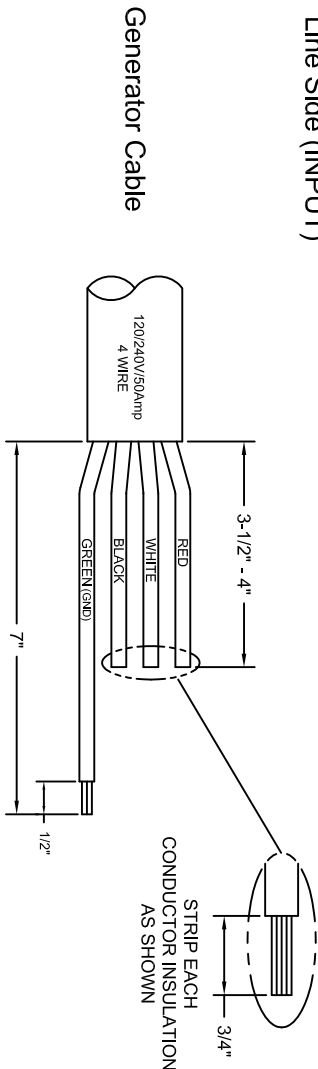


C. Load Side (OUTPUT)

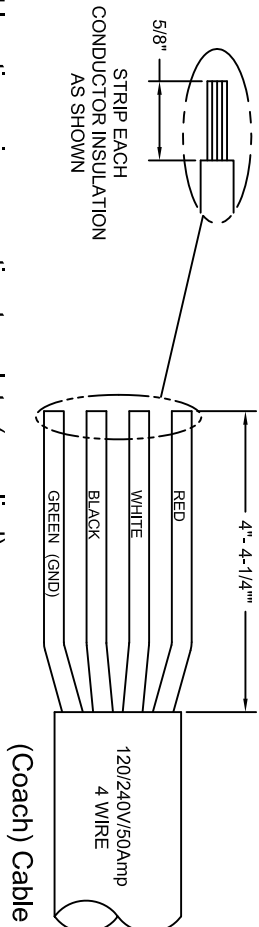

6. Install unit in pre-selected location using mounting template (supplied).
7. Install cables through strain reliefs and connect wires as shown.
Maintain wire color continuity. Torque conductor terminal connections to values shown.

CAUTION Do Not allow wire / insulation clippings to fall into unit- this may cause a failure.

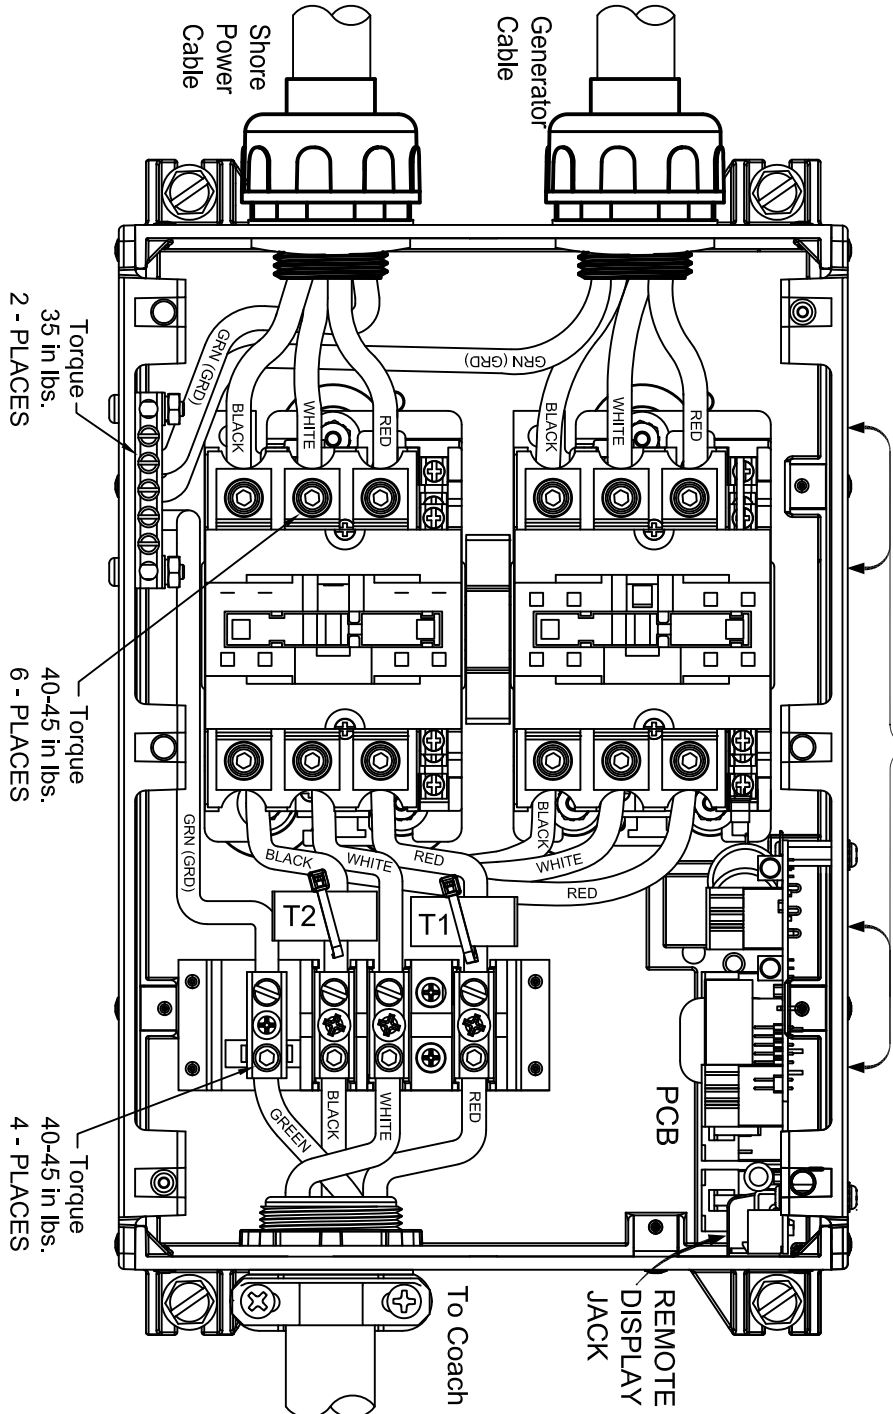

- AFTER CONNECTIONS ARE MADE, SECURE BOTH LINE & LOAD SIDE CABLES.**
8. Check position of cable through strain reliefs to ensure that no tension is present on all connections, once cables are positioned and connected to the appropriate terminals.
Secure cables in-place by tightening cable clamps to prevent cable movement. Install cover.