


Features

- Hot-dip galvanized for excellent corrosion resistance
- High strength ductile steel for long life and easy bending
- Smooth, continuous raceways for fast wire-pulling
- Kwik-Release End Cap to protect threads
- Listed to Safety Standard UL 6
- Manufactured in accordance with ANSI C80.1
- Available in trade sizes ½" (16 mm) – 6" (155 mm)

Standards

- Precision manufacturers for dependable, long-lasting value and ultimate protection for electrical conductors
- Highly resistant to damage from impact (Article 344 NEC)
- Recognized as equipment grounding conductor (Sec 250.118 NEC)
- UL Safety Standard 6

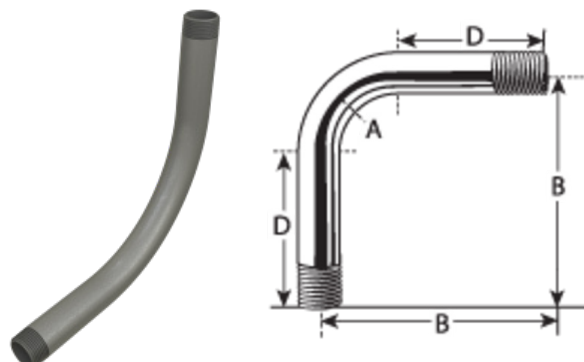

Galvanized Rigid Conduit (GRC) 90° Elbows

Listed to Safety Standard UL 6 Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Radius (A) ¹		Offset (B) ²		Straight (D) ¹		Approximate Weight per 100 Pieces		Standard Package
		in	mm	in	mm	in	mm	lb	kg	
½	16	4	102	5 ⅞	149	1 ½	38	68	30.8	50
¾	21	4 ½	114	7	178	1 ½	38	109	49.4	50
1	27	5 ¾	146	8 ¾	222	1 ⅞	48	201	91.2	25
1 ¼	35	7 ¼	184	10 ¾	273	2	51	336	152.4	20
1 ½	41	8 ¼	210	12 ¼	311	2	51	460	208.7	15
2	53	9 ½	241	14 ½	368	2	51	729	330.7	10
2 ½	63	10 ½	267	17	432	3	76	1374	623.2	1
3	78	13	330	19 ⅞	498	3 ⅞	79	2045	927.6	1
3 ½	91	15	381	22 ¾	578	3 ¼	83	2860	1297.3	1
4	103	16	406	23 ⅞	606	3 ⅞	86	3519	1596.2	1
5	129	24	610	34 ⅞	886	3 ⅞	92	6942	3148.9	1
6	155	30	762	45 ½	1156	3 ¾	95	11960	5425.1	1

¹Minimum requirement as per UL Standard

²For information only, not a requirement as per UL Standard

Shipped in palletized bulk cartons

Also available in the following Degrees (60°, 45°, 30°, 22½°, 15° & 11¼°)