

NICKEL-PLATED BRASS NPT TYPE A FITTINGS FOR CNP CONDUIT

LFMC SEALTITE® COMPACT FITTINGS
NPT NICKEL-PLATED BRASS PREMIUM
FITTINGS FOR ANACONDA SEALTITE®
CNP TYPE A CONDUIT (ONLY)

SPECIFICATIONS

- Nickel-Plated Brass with a TPE clamping ring
- Each fitting has a lock nut and inset sealing ring
- Color: Metallic
- Temp. range: -49°F to +221°F (-45°C to +105°C)
- cULus 514B Approved DWTT.E234207

APPLICATIONS


- Type A Non-Metallic flexible conduit
- Compact design ideal for tight spaces
- High-end appearance for good presentation



See: www.ul.com www.nfpa.org
www.naed.org www.nema.org
www.anacondasealtite.com


DESCRIPTION

- Nickel-plated Brass fittings designed for liquid tight installation on Type A Non-Metallic Conduit
- Excellent corrosion resistance, strength and durability
- IP 66/67 rated when installed with approved conduit and tightened to UL-514B/CSA C22.2 18.3 torque specifications
- Excellent washdown features with a smooth contour and no exposed threads
- Superior pullout strength, greater than plastic fittings
- Smooth sweeping 90° ID for wire pulling
- Lock nut and inset seal

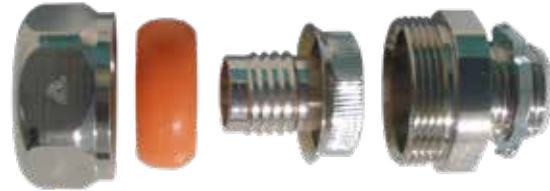


STRAIGHT

Trade Size (inches)	Item ID	Min. Int. Bore (inches)	Dimensions (inches)				KO Size NPT	Weight (lbs/100)	Std. Pkg.
			A	B	C	E			
3/8"	7640122IT	0.40	1.73	0.55	1.18	1.10	1/2"	22.0	10
1/2"	7640162IT	0.54	1.73	0.55	1.33	1.25	1/2"	26.4	10
3/4"	7640202IT	0.74	1.81	0.55	1.57	1.49	3/4"	34.1	5
1"	7640262IT	0.93	1.92	0.62	1.85	1.77	1"	45.1	5
1-1/4"	7640352IT	1.26	2.00	0.62	2.24	2.16	1-1/4"	68.3	2
1-1/2"	7640402IT	1.46	2.28	0.70	2.63	2.48	1-1/2"	105.8	2
2"	7640502IT	1.85	2.44	0.78	3.30	3.14	2"	180.7	2



90 DEGREE

Trade Size (inches)	Item ID	Min. Int. Bore (inches)	Dimensions (inches)					KO Size NPT	Weight (lbs/100)	Std. Pkg.
			A	B	C	D	E			
3/8"	7649122IT	0.40	1.57	0.55	1.18	1.81	0.94	1/2"	35.2	10
1/2"	7649162IT	0.54	1.57	0.55	1.33	1.81	0.94	1/2"	40.7	10
3/4"	7649202IT	0.74	1.73	0.55	1.57	2.00	1.18	3/4"	55.1	5
1"	7649262IT	0.93	1.96	0.62	1.85	2.20	1.45	1"	79.3	5
1-1/4"	7649352IT	1.26	2.24	0.62	2.24	2.51	1.85	1-1/4"	126.7	2
1-1/2"	7649402IT	1.46	2.55	0.70	2.63	2.95	2.16	1-1/2"	194.0	2
2"	7649502IT	1.85	2.91	0.78	3.30	3.30	2.36	2"	302.0	2



IP 66/67 with approved conduit