

Product data sheet

Specifications



APC Smart-UPS X, Line Interactive, 2000VA, Rack/tower convertible 2U, 100V-127V, 3x 5-15R+3x 5-20R+1x L5-20R NEMA, NMC, Extended runtime

SMX2000RMLV2UNC

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Main input voltage	120 V AC 1 phase
Other input voltage	100 V 110 V 127 V
Input connection	NEMA 5-20P
Efficiency at full load	75...154 V adjustable 70...153 V
Input frequency	50/60 Hz +/- 3 Hz auto-sensing
Output voltage	120 V AC 1 phase
Other output voltage	100 V 110 V 127 V
Rated power in W	1800 W
Rated power in VA	1920 VA
Output connection	3 NEMA 5-15R 3 NEMA 5-20R 1 NEMA L5-20R
Harmonic distortion	Less than 5%
Maximum configurable power in VA	1920 VA
Maximum configurable power in W	1800 W
Transfer time	4ms typical : 8ms maximum
UPS topology	Line Interactive
Waveform type	Sine wave
Output frequency	50/60 Hz +/- 3 Hz sync to mains
Replacement battery	APCRBC117

Graphs

Run Time	View Runtime Graph
Efficiency	View Efficiency Graph

Complementary

Battery type	Lead-acid internal included
Control panel	Multi-function LCD status and control console

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Free slot	0
Preinstalled device	Network management card 3 with environmental monitoring
Control panel	LED status display with on line : on battery : replace battery and overload indicators
Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays
UPS connectivity	Serial port USB port Pre-installed network management card 3
Surge energy rating	540 J
Noise filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : m
Number of rack unit	2U
Cable length	8 ft (2.4 m)
Number of cables	1
Color	Black
Height	3.3 in (85 mm)
Width	17.008 in (432 mm)
Depth	26.3 in (667 mm)
Product weight	84.77 lb(US) (38.45 kg)
Mounting location	Front
Mounting preference	Lower
Mounting mode	Rack-mounted
Two post mountable	0
USB compatible	No
Mounting mode	Rack-mounted with included kit
Provided equipment	CD with software Documentation CD Installation guide Network Management Card Rack mounting hardware Rack Mounting brackets Rack Mounting support rails Smart UPS signalling RS-232 cable USB cable
Number of power modules	0
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	Network card pre-installed
Redundant	No
Range of product	Smart-UPS
Product or component type	Uninterruptible power supply (UPS)

Environment

Product certification	BSMI CSA NOM TÜV VCCI Class A
Equipment protection policy	Lifetime : \$150000

Ambient air temperature for operation	32...104 °F (0...40 °C)
Ambient air temperature for storage	5...113 °F (-15...45 °C)
Storage altitude	0...50000 ft (0...15240 m)
Relative humidity	0...95 %
Storage relative humidity	0...95 %
Acoustic level	55 dBA
Heat dissipation	203 Btu/h
Operating altitude	0...10000 ft

Batteries & Runtime

Battery type	Lead-Acid battery
Extendable runtime	1
Included battery module	1
Empty battery slot	0
Typical recharge time	3 h
RBC quantity	1
Battery life	3...5 year(s)
Battery charging power	229 W rated

Ordering and shipping details

Category	11309-APC RESALE PRODUCTS
Discount Schedule	APC1
GTIN	731304288107
Returnability	No
Country of origin	PH

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.6 in (24.3 cm)
Package 1 Width	34.2 in (86.9 cm)
Package 1 Length	23.5 in (59.6 cm)
Package weight(Lbs)	100.002 lb(US) (45.36 kg)
Pallet unit layers	2
Pallet layers	4

Contractual warranty

Warranty (in months)	24 Battery 36 UPS
----------------------	-------------------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint	
Total lifecycle Carbon footprint	2 876 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 498 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	18 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 357 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Energy efficiency	
Optimized Energy Efficiency	Energy efficient product

Use Longer

Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Recyclability potential, in %	58
Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features

Premium Power Protection

Maintain business operations, customer satisfaction, and revenue by mitigating power and voltage disruptions.



1920VA / 1800W
Battery backup



Pure sine
wave power



97.8%
Online efficiency



Offer Marketing Illustration

Product benefits / Features

Peace of mind at home or office with
PowerChute™ Serial Shutdown Software

UPS management, graceful shutdown, and
energy management software for:



Desktops



Servers



Workstations



Offer Marketing Illustration

Product benefits / Features

Extended Runtime

Supports up to 10 external battery packs.

Estimated battery runtime at half load



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Network Management Card

Remotely monitor and manage your Smart-UPS with a pre-installed Network Management Card 3



Configuration and control options



Event and data logging



Enterprise management system compatible



Enables connection to EcoStruxure IT



Offer Marketing Illustration

Product benefits / Features

Installation Flexibility

The SMX series is rack/tower convertible based on your evolving business needs.



Offer Marketing Illustration

Product benefits / Features

Power protection for your physical & virtual IT environment
with PowerChute[™] Network Shutdown Software

Unattended, graceful shutdown, automated start-up and ease of use for:

- 

Hyperconverged
infrastructure
- 

Virtual
machines
- 

Hosts and
cluster services



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Communication Ports and Outlets

Advanced monitoring and management capabilities with numerous outlets to power and protect all your sensitive devices.



Network Management Card 3



3 NEMA 5-15R outlets (switched outlet group 1)



3 NEMA 5-20R outlets (switched outlet group 2)



1 NEMA L5-20R outlet (switched outlet group 3)

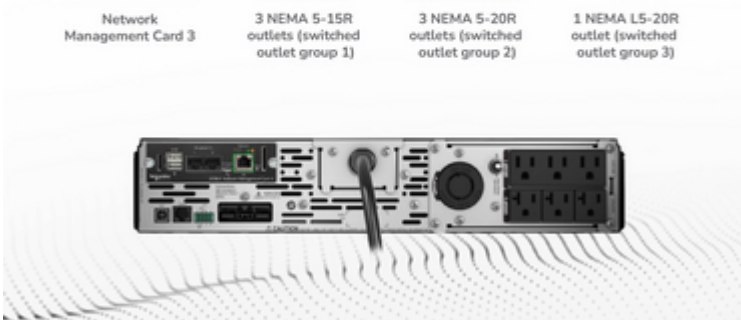


Image of product / Alternate images

Alternative



