

Contender® Series Rocker Arm and Push Button Stations

Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use Momentary Contact. Furnished with Internal Ground Screw.

Class I, Division 1, Groups C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

Controls

CONTROLS: HAZARDOUS LOCATION CONTROL STATIONS AND SWITCHES

Rocker Arm Handle

		Hub Size (Inches)	Description	Nameplate Marking	Catalog Number [†]		
					Dead-End	Feed-Thru	
1-Gang — Malleable Iron Body and Cover ^{††}							
		1/2	1 Circuit Universal		Specify	EDS1596	EDSC1596
		3/4				EDS2596	EDSC2596
		1				EDS3596	EDSC3596
1 Circuit	2 Circuits	1/2	2 Circuits Universal		Specify	EDS1194	EDSC1194
		3/4				EDS2194	EDSC2194
		1				EDS3194	EDSC3194
2-Gang — Malleable Iron Body and Cover ^{††}							
		1/2	2 Circuits Universal		Specify	—	EDSC1696
		3/4				EDS2696	EDSC2696
		1				EDS3696	EDSC3696
2 Circuits	4 Circuits	1/2	4 Circuits Universal		Specify	—	EDSC1294
		3/4				EDS2294	EDSC2294
		1				EDS3294	EDSC3294

Single Push Button

		Hub Size (Inches)	Description	A	B	Catalog Number	
						Dead-End	Feed-Thru
1-Gang [†]							
		1/2	2 Circuits Universal Momentary			EDS1192	EDSC1192
		3/4				EDS2192	EDSC2192
		1				EDS3192	EDSC3192
Nameplate: Start/Stop Momentary	Nameplate: Emergency Stop Maintained Mushroom Head	1/2	2 Circuits Universal Red Maintained			EDS1192UM1	EDSC1192UM1
		3/4				EDS2192UM1	EDSC2192UM1
		1				EDS3192UM1	EDSC3192UM1

Cover Assemblies [†]


					Nameplate Marking	Catalog Number Cover With Device
Description						
 EDKBRU2	 EDKBU2L	 EDKBDPB	1 Circuit Universal		Specify	EDKBRU1
			2 Circuits Universal		Specify	EDKBRU2
			1 Circuit Universal		Specify	EDKBU1L
			1 Circuit Universal		Specify	EDKBUM1L
			2 Circuits Universal		Specify	EDKBU2L
			2 Circuit Universal		Specify	EDKBDPB
			2 Circuits Universal (Maintained)			Specify

[†] Malleable Iron Body and Cover. For Aluminum Body and Cover, add suffix - SA.


[‡] For Aluminum Cover only, add suffix - A.

Contender® Series Mounting Body Dimensions


1-Gang




2-Gang




1- and -Gang Side View




3-Device

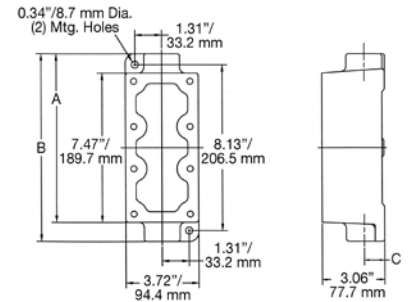


Tandem

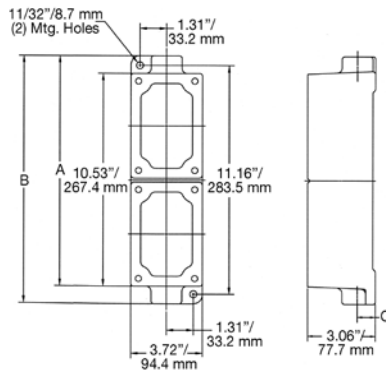

NPBRKT Nameplate Mounting Bracket

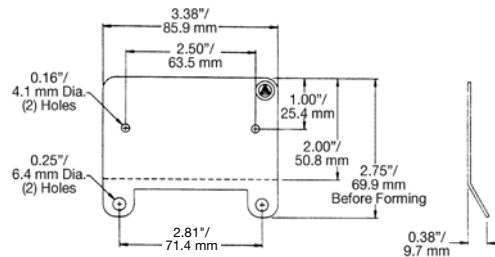

Secure bracket under cover screws of box. Torque cover screws to 35" - lbs.



Unilet Type	Hub Size (Inches)	Dimensions in Inches/Millimeters		
		A	B	C
1-Gang	1/2	6.06/153.9	6.81/173.0	0.75/19.1
	3/4	6.06/153.9	6.81/173.0	0.88/22.4
	1	6.17/156.7	7.03/179.6	1.00/25.4
2-Gang	1/2	6.06/153.9	6.81/173.0	0.88/22.4
	3/4	6.06/153.9	6.81/173.0	0.88/22.4
	1	6.17/156.7	7.03/179.6	1.00/25.4
3-Device	1/2	8.34/211.8	9.19/233.4	1.00/25.4
	3/4	8.34/211.8	9.19/233.4	1.00/25.4
	1	8.34/211.8	9.19/233.4	1.00/25.4
Tandem	1/2	11.31/287.3	12.09/309.1	0.88/22.4
	3/4	11.31/287.3	12.09/309.1	0.88/22.4
	1	11.44/290.6	12.31/312.7	1.00/25.4