

## Wet Location 360° Motion Sensor

### ELECTRICAL:

- **Input Voltage:** 120/277/347 VAC
  - **Operational Frequencies:** 50/60Hz
  - **Wire Designation:** Line-Black, Load-Red, Neutral-White
  - **Load Rating:**
    - 800VA @ 120VAC
    - 1200VA @ 277VAC
    - 1500VA @ 347VAC
- } Ballast/Driver
- **Mounted:** 1/4 HP Motor Load @ 120V

### ENVIRONMENTAL:

- **Operating Temperature Range:** -40°F to 158°F (-40° C to 70°C)
- **For use in wet location environments (IP65)**
- **Operating Humidity:** 20% to 90% non-condensing
- **IP65 Rated**

### CONSTRUCTION:

- **High-impact Housing**
- **Injection Molded Plastic**

### OPTICAL:

- **Two interchangeable lenses** (HB Applications, LB Applications)
- **Lenses sealed and gasketed**
- **Lens choices for mounting between 20 and 40 feet**

### SPECIFICATIONS:

- **Overall height:** 4.48" (11.37 cm)
- **Width:** 4.09" (10.38 cm)
- **Depth:** 1.94" (4.92 cm)
- **Color:** White
- **Listings:** UL and cUL, Photoelectric Switch, CEC Title 24 Compliant





### CONTROLS:

- **Timer Setting:** 30 seconds - 20 minutes

### RANGE AND COVERAGE:

- **HB - 10' to 24' mounting height, 24' in diameter coverage at 20' height.**
- **LB - 20' to 40' mounting height, 68' in diameter coverage at 40' height.**

### COVERAGE:

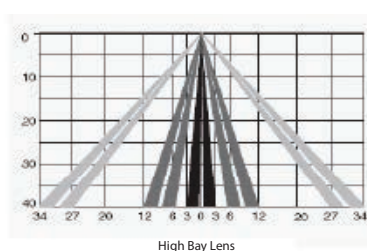

### Project Information


Job Name

Catalog Number MS360WL

Approved by



### DIMENSIONS

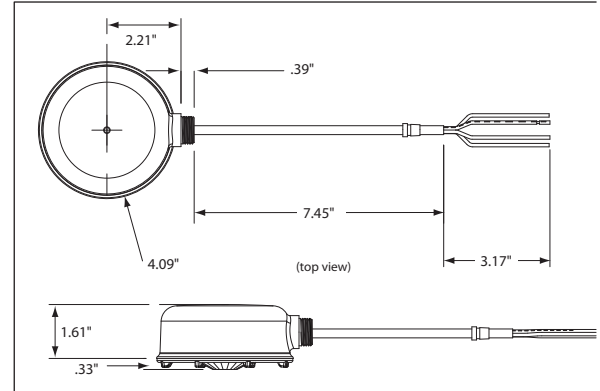


### ORDERING INFORMATION

| Catalog #  | Description                                             | Std. Pkg. |
|------------|---------------------------------------------------------|-----------|
| MS360WL    | Wet Location 360° Motion Sensor (Standard with LB Lens) | 1         |
| MS360WL-HB | Wet Location 360° Motion Sensor w/ HB Lens              | 1         |

**SPECIFICATIONS:**

- **Overall height:** 4.48" (11.37 cm)
- **Width:** 4.09" (10.38 cm)
- **Depth:** 1.94" (4.92 cm)

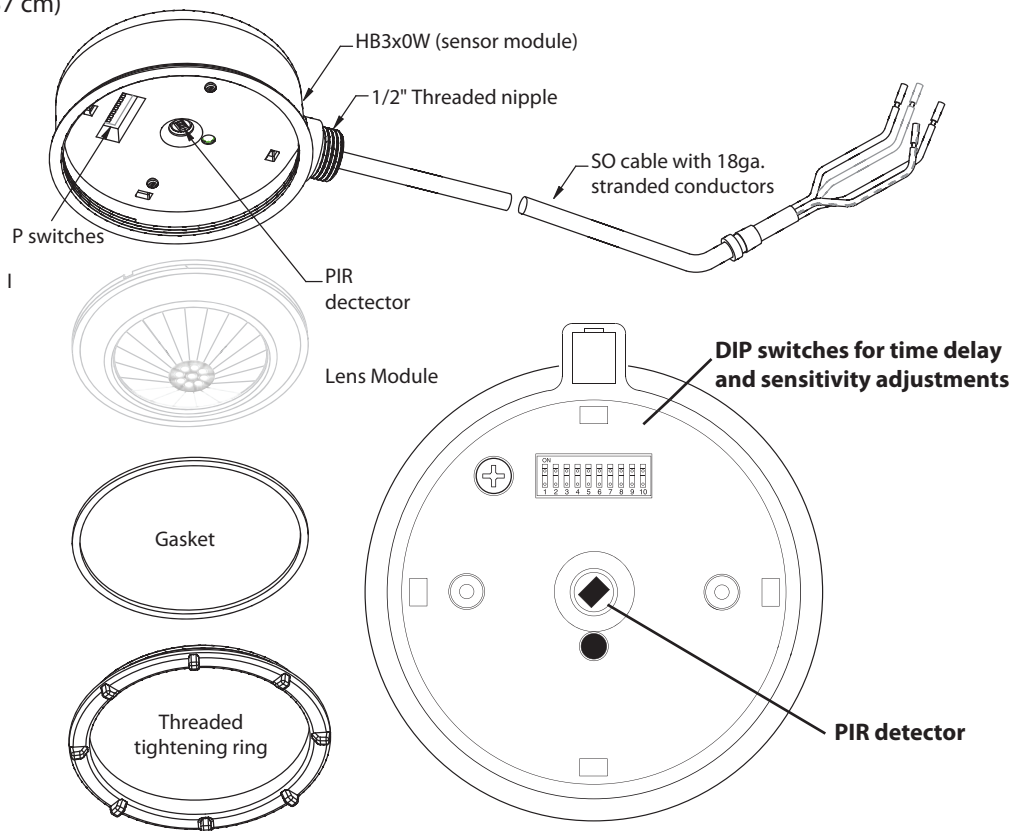

**MOUNTING DETAIL**

