



70530FR



70530NP



70530NC



70530MB



70530ER

Features - Specifications

SINGLE FLUSH RECEPTACLE

- Face molded of impact/chemical-resistant nylon
- Base molded of reinforced thermoplastic polyester
- Combination back and side wiring, clamp-type terminals, accept #14 thru #8 AWG solid or stranded conductors
- One-piece rivetless copper-alloy contact design
- Heavy-duty mounting straps are nickel-plated to resist corrosion

MALE BASE AND FEMALE EQUIPMENT RECEPTACLE

- Impact/chemical-resistant toughened nylon construction
- Transparent terminal cover and extended "tear-drop" wiring pockets

- Combination Phillips/slotted terminal screws are backed out to simplify wiring
- ### PLUG AND CONNECTOR
- Impact/chemical-resistant toughened nylon construction
 - Internal "self centering" Triple-Gripper cord grip with "radius teeth" design
 - Double wall construction
 - EPDM dust seal surrounds cord to help prevent moisture and contaminants from entering wiring chamber
 - Captive terminal screws are backed out to simplify wiring
 - Combination Phillips/slotted terminal and assembly screws

SINGLE AND FEMALE EQUIPMENT RECEPTACLE

- UL Listed File #E2258 – Guide #RTRT
- CSA Certified File #LR16215 – Guide #365E1

PLUG, CONNECTOR AND MALE BASE

- UL Listed File #E1381 – Guide #AXUT
- CSA Certified File #LR16215 – Guide #20T2

ALL LOCKING DEVICES

- Comply with NEMA Standards WD-1, WD-6, UL 498 and Federal Specification WC596 where applicable. See page P-1 for complete listing.
- NOM
- CE


LOCKING DEVICES^①

CATALOG NUMBER			CORD DIA.	DESCRIPTION
L5-30 30 AMP 125V	L6-30 30 AMP 250V	L7-30 30 AMP 277VAC		
70530FR 70530FCR ^②	70630FR —	70730FR —	— —	Single flush receptacle, black nylon Single flush receptacle, yellow nylon, corrosion resistant Single flush receptacle, orange nylon, isolated ground
70530IG ^③	70630IG ^③	—	—	Plug, black/white nylon Plug, black nylon
70530NP 70530NPB 70530NPC 70530NPCR ^②	70630NP 70630NPB 70630NPC 70630NPCR ^②	70730NP — — —	.300-.950 ^④ .300-.950 ^④ .300-.950 ^④ .300-.950 ^④	Same as above w/Robertson screws Plug, yellow/white nylon, corrosion resistant
70530NC 70530NCB 70530NCC 70530NCCR ^②	70630NC 70630NCB 70630NCC 70630NCCR ^②	70730NC — — —	.300-.950 ^④ .300-.950 ^④ .300-.950 ^④ .300-.950 ^④	Connector, black/white nylon Connector, black nylon Same as above w/Robertson screws Connector, yellow/white nylon, corrosion resistant
70530MB 70530ER	70630MB 70630ER	70730MB 70730ER	— —	Male base, white nylon cup Female equipment receptacle, white nylon cup

INDOOR AND OUTDOOR RECEPTACLE PLATES^⑤

CATALOG NUMBER	DESCRIPTION
S6111 S28111 N01111 7420B	Type 302/304 stainless steel, smooth, single-gang .040 (1.0) brass, smooth, single-gang Black nylon, smooth, single-gang Die cast aluminum, with cover, single-gang, F.S. box mounting

PRODUCT DIMENSIONS – () Indicates mm dimensions

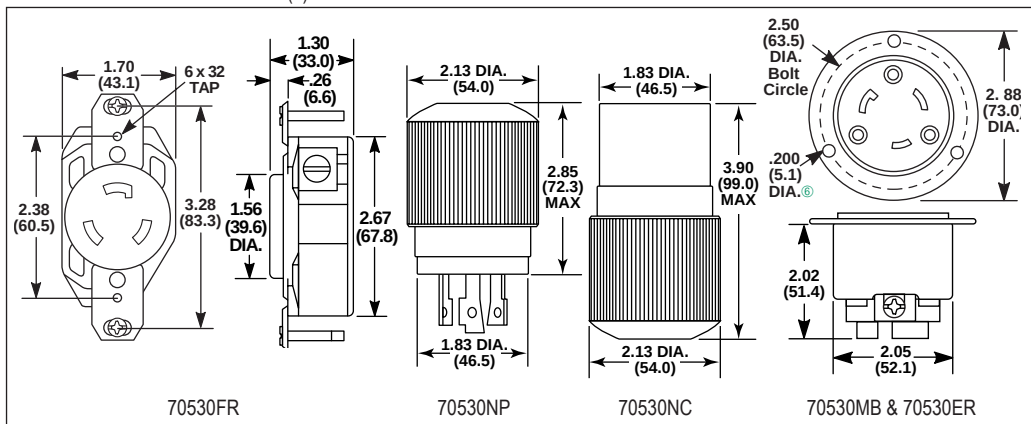

① See page I-17 for information on boots.
② See Section I for information on corrosion-resistant devices.
③ See Section G for information on isolated ground devices.
④ .300-.950 (7.6-24.1)

⑤ See Section M & N for complete information on plates.
⑥ Three holes spaced 120 deg. apart on 2.50 (63.5) diameter bolt circle. See page P-3 for horsepower ratings. Specifications are subject to change without notice.