




CCFDFR, Clear Cover, Flame Retardant, for 250 kcmil H-Tap

By Burndy
Catalog # [CCFDFR](#)

Clear Cover only for YH292C or YH298C H-Tap Connectors, 250 kcmil (connectors not included)

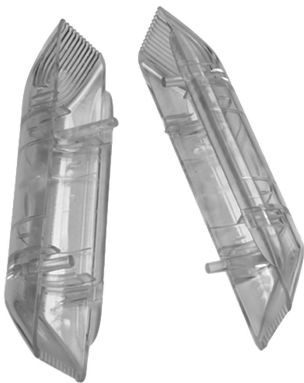

Features

- Connector end stops
- Flexible fingers
- snap tight latches
- 2piece contruction
- magnifying lens

Application

Cover

Specifications

Certification - UL Recognized	No
Buy American Compliant	Yes
Certification - cULus	No
EU RoHS Indicator	Yes
Buy America(n) Qualified	• Buy America Compliant (All status valid till December 2026) • Buy American Act Compliant (All status valid till December 2026) • BABA Compliant (All status valid till December 2026)
Certification - ETL	No
Standards - RoHS Compliance Status	CM
UL Listed	Yes
Certification - CSA Approved	Yes
Certification - 94VO Rated	Y
Conductor	
Conductor - Max Length	0.95 in
Conductor - Material	COPPER
Wire Size	250 KCMIL
Conductor - AL Str Size	250 KCMIL
Conductor - Copper Str Size	250 KCMIL
Conductor - Copper Str	250 KCMIL
Compact Size	
Conductor Type	CODE/FLEX
Conductor - Copper Str Size Range	250 kcmil

Configuration

Connector Type	H-TAP COVERS CLEAR
----------------	--------------------

Current

Voltage Rating	600 V
Voltage - Maximum	35000

Dimensions

Package Height	0.000 in
Dimension - Height inch	1.82 in
Package Weight	0.000 lb.
Package Length	0.000 in
Package Width	0.000 in
Dimension - L Length Overall mm	129 mm
Width	1.48 in
Length	5.06 in
Dimension - Width inch	1.48 in
Height	1.82 in
Dimension - Maximum	250 kcmil
Conductor Size	
Accommodated	
Dimension - Length Overall inch	5.06 in
Dimensions	5.06 in x 1.48 in x 1.82 in

General

Color	Clear
Plated	N
Color Code	Purple
Sub Brand	CRIMPIT
UPC	781810438152
Type	H-Tap Connector
Material	Polycarbonate
Plating Type	Unplated
UPC 12 Digit	781810438152
Fire Resistance	Yes
UPC 14 Digit GTIN	00781810438152

Logistics

Minimum Pack Quantity	1
Pallet Quantity	2250
Carton Quantity	25

Operational

Operating Temperature	90 °C
Temperature Rating	194



A Hubbell brand