




YH298C, Compression H-Tap

By Burndy
Catalog # YH298C

Copper Compression H Tap, 250 kcmil-2 AWG (Main), 8 AWG-14 AWG (Tap), Tin Plated

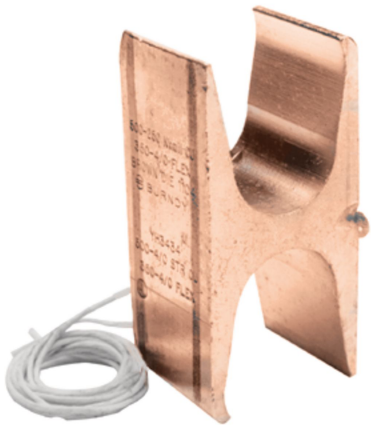

Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

Application

Wire Tap

Specifications

Buy American Compliant	No
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

Conductor

Conductor - Material	COPPER
Conductor - Copper Flex I Tap	14;8
Conductor - Copper Flex I Tap Range	8 AWG-14 AWG
Conductor - Copper Flex K Run	2;1;1/0;2/0;3/0;4/0
Conductor - Copper Flex K Tap	14;8
Conductor - Copper Flex K Tap Range	8 AWG
Conductor - Copper Flex M Run	2;1;1/0;2/0;3/0;4/0
Conductor - Copper Flex M Tap	14;8
Conductor - Copper Flex G Run	2;1;1/0;2/0;3/0;4/0
Conductor - Copper Flex G Run Range	2-4/0

Conductor - Copper Str Run	2;1;1/0;2/0;3/0;4/0;250
Conductor - Copper Flex G Tap	14;8
Conductor - Copper Str Run Range	250 KCMIL-2 AWG
Conductor - Copper Flex G Tap Range	8 AWG-14 AWG
Conductor - Copper Flex H Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG
Conductor - Copper Flex H Run Range	8 AWG-4/0 AWG
Conductor - Copper Str Tap	14;12;10;9;8
Conductor - Copper Str Tap Range	8 AWG-14 AWG
Conductor - Copper Flex H Tap	14;8
Conductor - Copper Flex H Tap Range	8 AWG-14 AWG
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Run	4/0 AWG-2 AWG

Configuration

Connector Type	H-TAP
----------------	-------

Current

Voltage - Maximum	35000
Voltage Rating	35 kV

Dimensions

Dimension - L Length Overall mm	23 mm
Dimension - Height inch	1.52 in
Dimension - Strip Length inch	1-1/16
Dimension - Width fraction	.90 in
Dimension - Width inch	1.52 in
Dimension - Length Overall inch	0.90 in

General

Die Index	654
Trade Name	CRIMPIT™
Sub Brand	CRIMPIT
Color Code	Purple
Plated	Y
Type	Compression Taps

UPC 12 Digit

UPC 14 Digit GTIN

Material

Plating Type

Finish Type

UPC

781810013915

00781810013915

COPPER

Tin - Electro Plated

Tin-Plated

781810013915

Carton Quantity

Pallet Quantity

50

7200

Operational

Temperature Rating

194

Product Assets

[Catalog \[English\]](#)

Logistics

Minimum Pack Quantity

1

