



**YH6C6C, Copper Compression H-Tap, Run:
#6-10 AWG, Tap: #6-14 AWG, Tin Plated**

By Burndy
Catalog # [YH6C6C](#)

Copper Compression H Tap, 6 AWG-10 AWG (Main), 6 AWG-14 AWG (Tap), Tin Plated

Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

Application


Wire Tap

Specifications

Buy American Compliant	Yes
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Buy America(n) Qualified	Buy American Act Compliant (All status valid till December 2025);BABA Compliant (All status valid till December 2025)
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

Conductor

Conductor - Material	COPPER
Conductor - Copper Flex I Tap	14;8;7;6
Conductor - Copper Flex I Tap Range	6 AWG-14 AWG
Conductor - Copper Flex K Run	8;7;6
Conductor - Copper Flex K Tap	14;8;7;6
Conductor - Copper Flex M Run	8;7;6
Conductor - Copper Flex M Tap	14;8;7;6
Conductor - Copper Flex G Run	8;7;6

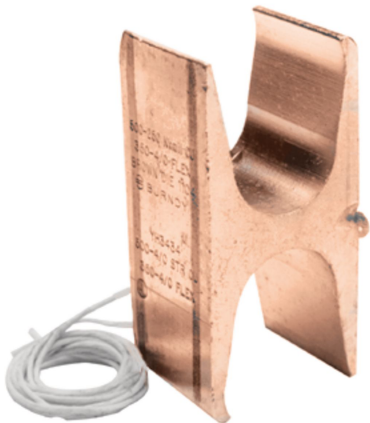

Conductor - Copper Flex G Run Range	8-6
Conductor - Copper Str Run	10;9;8;7;6
Conductor - Copper Flex G Tap	14;8;7;6
Conductor - Copper Str Run Range	6 AWG-10 AWG
Conductor - Copper Flex G Tap Range	14-6
Conductor - Copper Flex H Run	6 AWG
Conductor - Copper Flex H Run Range	6 AWG
Conductor - Copper Str Tap	14;12;10;9;8;7;6
Conductor - Copper Str Tap Range	6 AWG-14 AWG
Conductor - Copper Flex H Tap	14;8;7;6
Conductor - Copper Flex H Tap Range	14-6
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Run	6 AWG-10 AWG

Configuration

Connector Type	H-TAP
----------------	-------

Current

Voltage - Maximum	35000
Voltage Rating	35 kV

Dimensions

Dimension - L Length Overall mm	15 mm
Dimension - Height inch	0.81 in
Dimension - Strip Length inch	3/4
Dimension - Width fraction	.39 in
Dimension - Width inch	0.81 in
Dimension - Length Overall inch	0.60 in

General

Die Index	BG
Trade Name	CRIMPIT™
Sub Brand	CRIMPIT
Color Code	Orange
Plated	Y
Type	Compression Taps
UPC 12 Digit	781810042373

UPC 14 Digit GTIN

Material

Plating Type

Finish Type

UPC

00781810042373

COPPER

Tin - Electro Plated

Tin-Plated

781810042373

Carton Quantity

Pallet Quantity

150

13500

Operational

Temperature Rating

194

Logistics

Minimum Pack Quantity

1

Product Assets

Catalog [\[English\]](#)



A Hubbell brand