



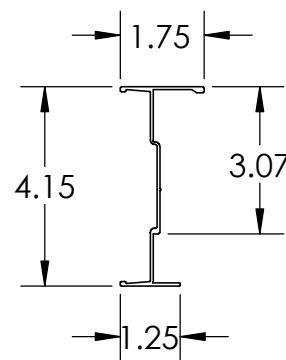

PW Ladder Cable Tray Straight Section

4A12C
4"(H) Side Rail Tray

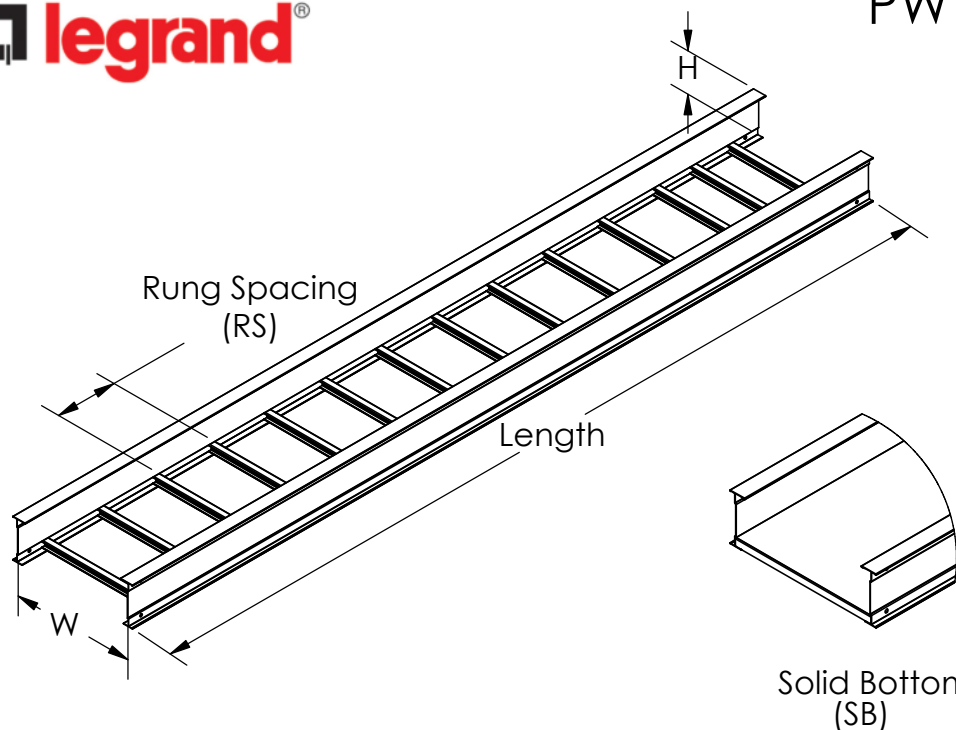

Overall Width: $W + 1.5"$

Tray Width (W)	Tray Weight * (LBS./FT.)
6	1.51
9	1.58
12	1.66
18	1.81
24	2.12
30	2.31
36	2.50

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: $I_{x-x} = 1.418 \text{ in}^4$, $S_{x-x} = 0.646 \text{ in}^3$

* Based on 9" rung spacing

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30
---	---	----	----	----	----	----	----	----	----	----	----	----

SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5

410	0.37	241	0.69	154	1.08	107	1.55	76	2.11	56	2.76												
-----	------	-----	------	-----	------	-----	------	----	------	----	------	--	--	--	--	--	--	--	--	--	--	--	--

ITRAY STRAIGHT SECTION CATALOG NUMBERING EXAMPLE:

