




PW Ladder Cable Tray Straight Section

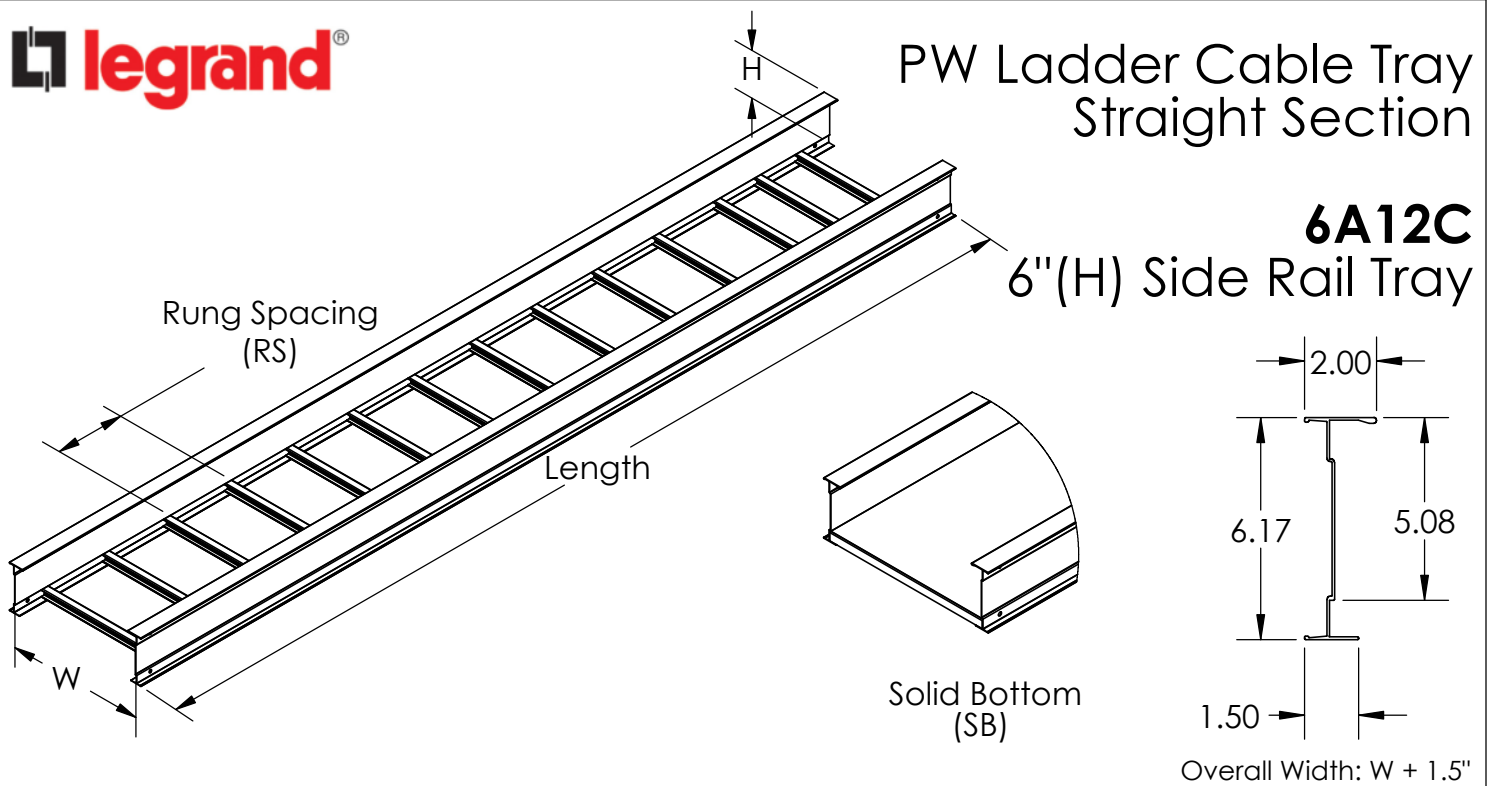

Tray Width (W)	Tray Weight * (LBS./FT.)
6	1.97
9	2.04
12	2.12
18	2.27
24	2.58
30	2.77
36	2.96

* Based on 9" Rung Spacing

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: Ix-x = 3.993 in⁴, Sx-x = 1.182 in³

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30
SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5												
410	0.16	394	0.48	252	0.76	175	1.09	124	1.48	92	1.94	

ITRAY STRAIGHT SECTION CATALOG NUMBERING EXAMPLE:												
BOTTOM TYPE	0	9	-	6	A	1	2	C	-	S	1	4
VENTED												
06 - 6" Rung Spacing												
09 - 9" Rung Spacing												
12 - 12" Rung Spacing												
NON-VENTED												
SB - Solid Bottom												
RAIL HEIGHT												
6 - 6"												
NEMA CLASS												
MATERIAL												
LENGTH*												
S120 - 120"												
S144 - 144"												
S240 - 240"												
WIDTH												
06 - 6"												
09 - 9"												
12 - 12"												
18 - 18"												
24 - 24"												
30 - 30"												
36 - 36"												



Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil