


Features

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished to a bright, easily maintainable finish that is modern, attractive, easy to clean, and that also enhances the surface's resistance to pitting and bacterial corrosion
- Heavy-duty locknut bites into the box and enclosure to prevent vibratory loosening of the connection
- Integrally fused PVC gasket provides positive seal against water, oils and other liquids
- Designed for use with rain tight, watertight, and oil tight enclosures
- NPSL – straight threads
- No package quantity required

Applications

For use on threaded stainless rigid/IMC conduit to provide a seal against water and oil.

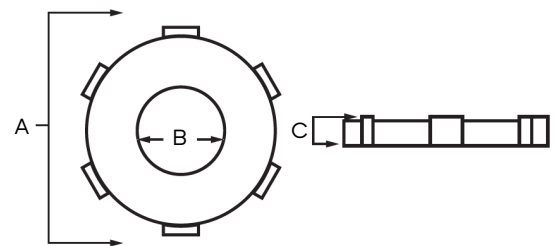

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	Weight per each (lb)
S60500LNWS	½	1.25	0.76	0.23	0.02
S60700LNWS	¾	1.45	0.98	0.26	0.03
S61000LNWS	1	1.82	1.21	0.29	0.06
S61200LNWS	1 ¼	2.21	1.57	0.31	0.08
S61500LNWS	1 ½	2.45	1.81	0.33	0.09
S62000LNWS	2	2.92	2.30	0.34	0.10
S62500LNWS	2 ½	3.55	2.76	0.35	0.17
S63000LNWS	3	4.20	3.41	0.38	0.19
S64000LNWS	4	5.26	4.41	0.39	2.10

All dimensions are for informational purposes only

*Tolerances +/- 2.5%