

SACE Emax 2 - Tmax XT

Blocco a chiave in aperto speciali (STI, Kirk) - E1.2 - XT7M

Key lock in open position for special devices (STI, Kirk) - E1.2 - XT7M


Schlüsselverriegelung in AUS-Stellung, Spezial (STI, Kirk) - E1.2 - XT7M

Verrouillage par clé en position d'ouvert spéciaux (STI, Kirk) - E1.2 - XT7M

Bloqueo a llave en posición de abierto especial (STI, Kirk) - E1.2 - XT7M


钥匙锁闭装置位于打开位置用于特殊设备 (STI, Kirk) - E1.2 - XT7M

E1.2 - XT7M

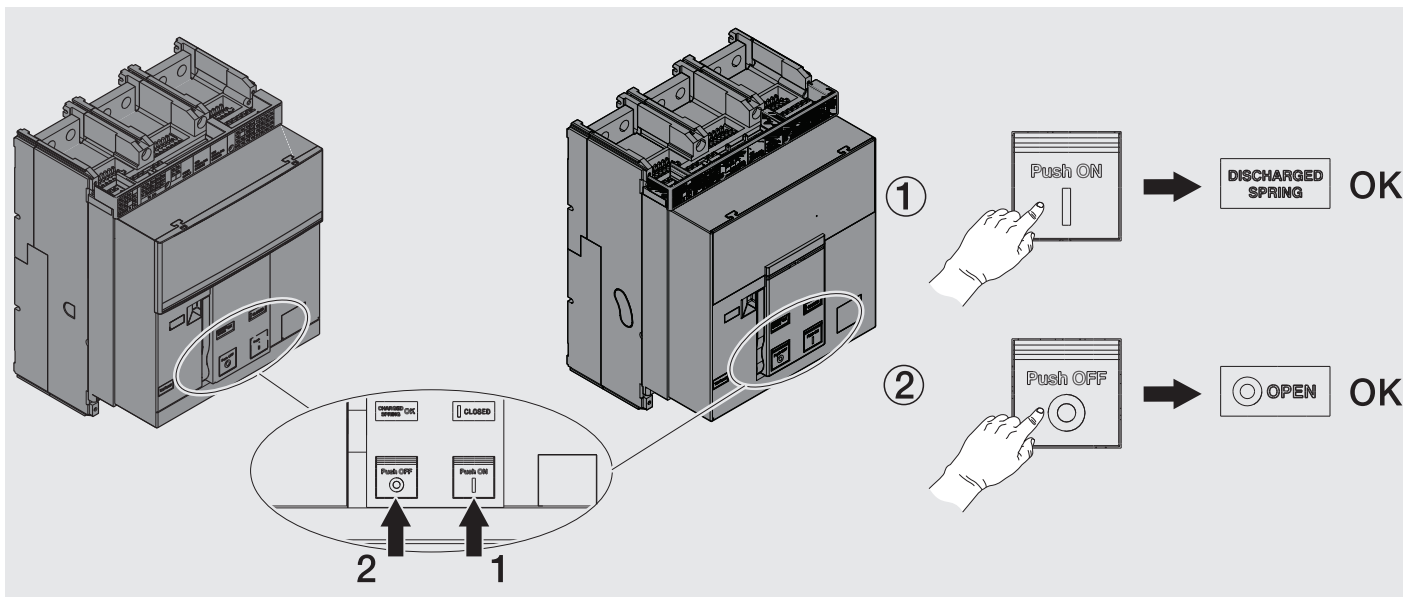


A CURA DEL CLIENTE
AT CUSTOMER'S EXPENSE
ZU LASTEN DES KUNDEN
A LA CHARGE DU CLIENT
A CARGO DEL CLIENTE
由客户承担费用

STI ABA90DEL5000
STI HBA90DPS5000




F


KIRK CAMLOCK KCAM00010



G




A




B



C



D




E




2x

This exploded view diagram illustrates the assembly of a control panel. The main unit is shown on the left. To its right is a top cover (labeled 3) and a mounting bracket (labeled 4). Below the bracket are four screws (labeled I) and a pin (labeled J). To the right of the bracket is a terminal block (labeled 2) with a screw (labeled H) and a pin (labeled 2). Dashed lines indicate the alignment and assembly path for these components.


3

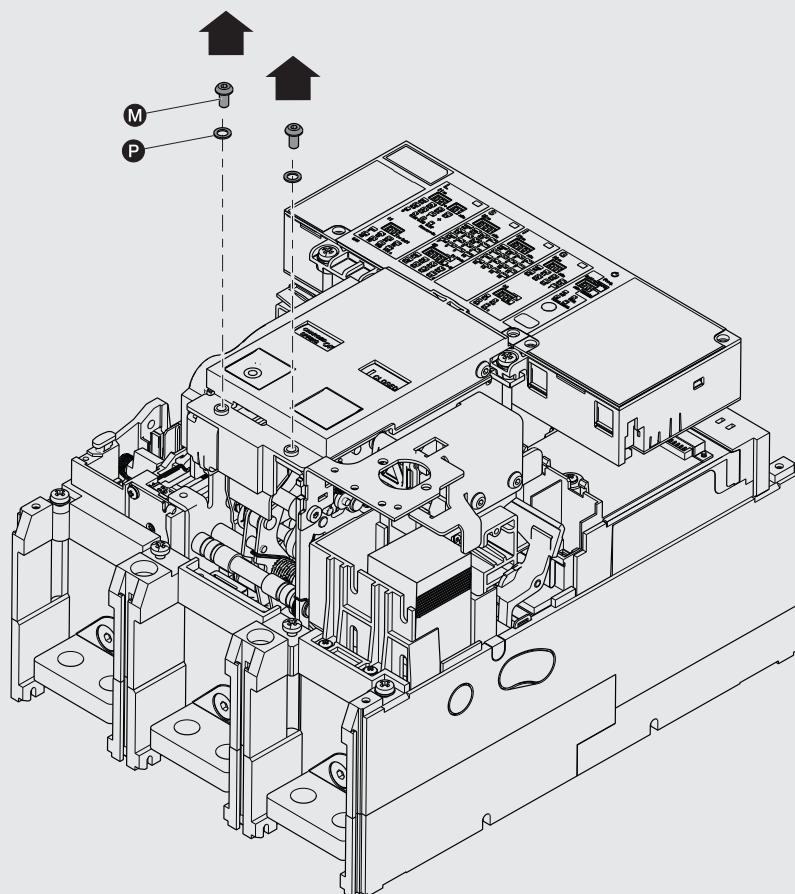

4

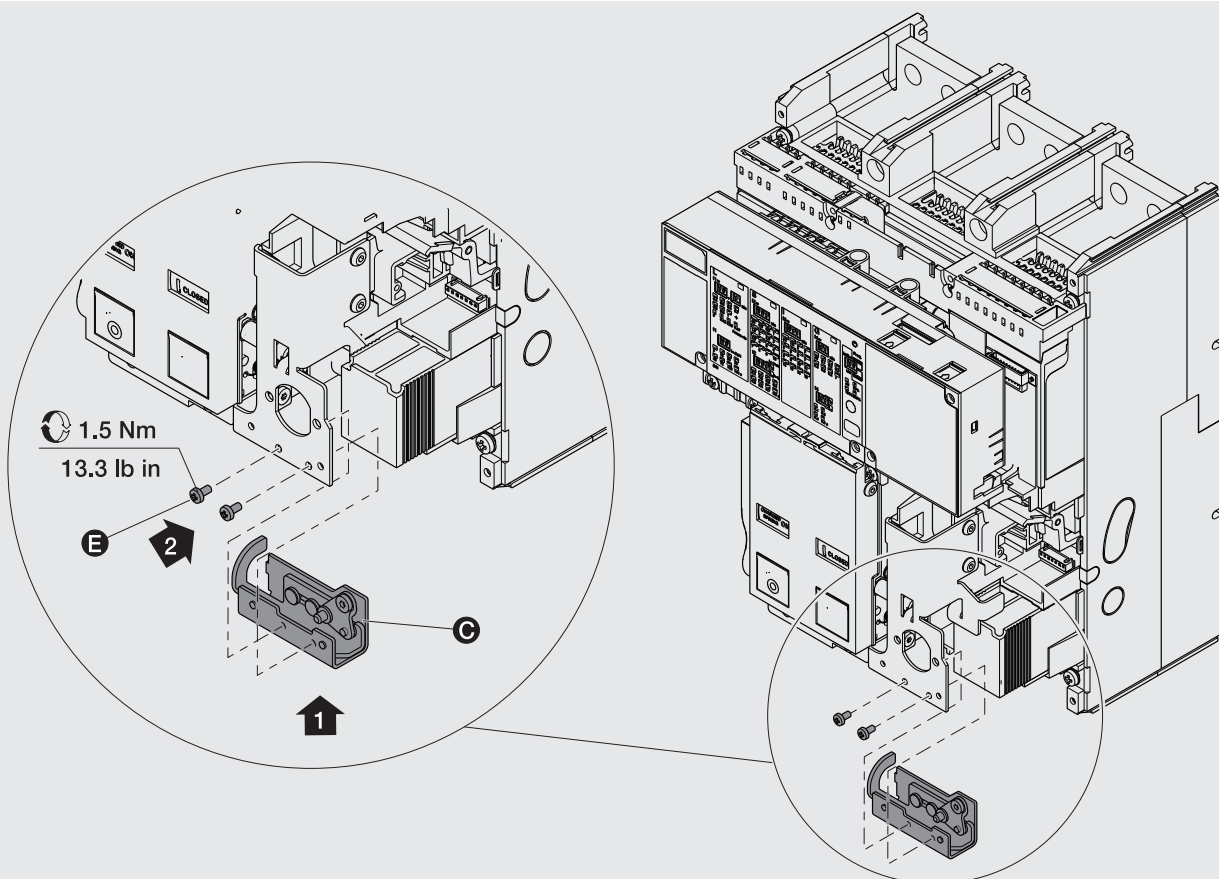

5

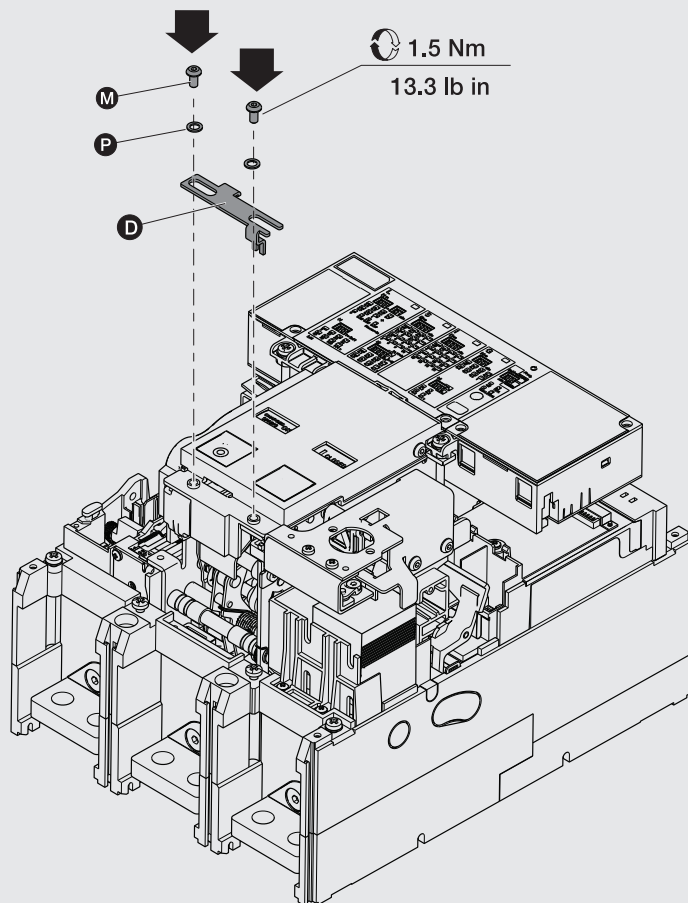

6

