


Fire-Classified Kit for CFB7G Series for Rectangular Covers, 2 or 3 Hour Fire Classified Floor Rating

By Hubbell Wiring Device-Kellems
Catalog # [CFB7G6FRK](#)

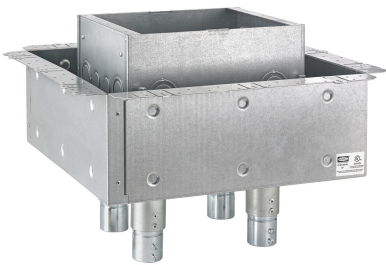

Fire-Classified Kit for CFB7G Series for Rectangular Covers, 2 or 3 Hour Fire Classified Floor Rating

Features

- Fire-Classified Kit for Use with 7-Gang CFB7G6 Floorbox
- For Concrete Pours from 3¼" up to 5½" Above Upper Most Portion of Decking
- Preserves 2 or 3 hour Fire Classified Floor Rating

Application

For Use in Concrete Floors

Specifications

- | | |
|----------------------|--|
| Industry Standard(s) | <ul style="list-style-type: none">• UL/CSA• UL514 |
|----------------------|--|

Conductor

- | | |
|-------------|-----------------|
| Cable Entry | (1) Egress Door |
|-------------|-----------------|

Configuration

- | | |
|-------------------|---------------|
| Number of Gang(s) | 7-Gang |
| Mounting Method | Steel Decking |

Dimensions

- | | |
|--------|----------|
| Length | 17.18 in |
| Weight | 23.9 lb. |

- | | |
|------------|------------------------------|
| Height | 6.5 in |
| Width | 17.18 in |
| Size | 7-Gang |
| Dimensions | 17.18 in x 17.18 in x 6.5 in |

General

- | | |
|--------------------------|-----------------------------------|
| Application - For Use On | Concrete |
| Color | Metallic |
| Accessory Type | Fire Classified Kit |
| Sub Brand | Recessed Concrete Floor Boxes |
| Series | Recessed Rectangular - CFB Series |
| UPC | 783585545776 |
| Type | Fire-Classified Floor Box Kit |
| Construction | Fabricated |
| Material | Composite |

Logistics

- | | |
|-----------------|---|
| Carton Quantity | 1 |
|-----------------|---|

Product Assets

- [Catalog \[English\]](#)
[Catalog Page \[English\]](#)
[Installation Manual \[English\]](#)