

Locking Devices, Hubbellock, Hospital Use,
Retrofit Kit for Single Receptacle, 20A
125V, L5-20R, Screw Terminal, Stainless
Steel

By Hubbell Wiring Device-Kellems
Catalog # [HBL24300RKS](#)

Hubbellock, Hospital Grade, Retrofit Kit for Single Receptacle
20A

Features

- Hospital Use
- Retrofit Kit for Single Receptacle
- 20A 125V

Application

Explosion Proof Hospital Use Only Hubbellock

Specifications


Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	No
Nema Rating	Non-NEMA

Conductor

Number Of Wires	3-Wire Grounding
Wire Size	#14 AWG to #12 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	20 A
Voltage Rating Description	125 VAC
Current Rating	20 A

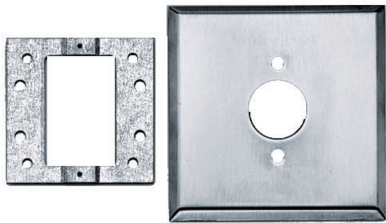

Voltage Rating	125 VAC
Wattage	2500
Connectivity	Pressure Terminal Screws
Phase	Single Phase
Current / Amperage Rating	20 A

Dimensions

Display Size	Standard Sized Product
--------------	------------------------

General

Color	Black
UPC	783585015996
Material - Mounting Hardware	Screw Mounting
Item Type	Conversion to Straight Blade Single
Material	Thermoplastic

Logistics

Carton Quantity	10
-----------------	----

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)