

Locking Devices, Twist-Lock®, Corrosion
Resistant Valise® Plug, 30A, 125V AC, 2
Pole, 3 Wire Grounding, NEMA L5-30P,
Corrosion resistant, Yellow nylon

By Hubbell Wiring Device-Kellems
Catalog # [HBL26CM11V](#)

Locking Devices, Twist-Lock®, Corrosion Resistant Valise® Plug,
30A, 125V AC, 2 Pole, 3 Wire Grounding, NEMA L5-30P,
Corrosion resistant, Yellow nylon

Features

- Powerful cord grip prevents conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body
- Unique patented corrosion resistant clamp type terminals provide a superior electrical connection by bundling the conductor strands when clamps are tightened

Application

Extra Heavy Duty Industrial/Marine

Performance

Electrical-Current Interrupting - Certified for full rated current,
Electrical - Dielectric Voltage - Withstands 2,000V minimum,
Mechanical - Terminal Accommodation - #18 AWG - #10 AWG
stranded copper wire only, Mechanical - Terminal Identification -
Terminals identified in accordance with UL 498, Environmental -
Flammability - HB or better per UL94/CSA 22.2 No.0.6,
Environmental - Operating Temperatures - Maximum Continuous
75°C, Minimum -40°C (w/o impact), Environmental - Moisture
Resistance - IP20 Suitability

Specifications


Standards - RoHS Compliance	CM
Status	
Environmental Conditions	Corrosion Resistant
EU RoHS Indicator	Contact Manufacturer
Nema Rating	L5-30P
Industry Standard(s)	• Certified to CSA C22.2 No.42 • Fed.Spec. W-C-596 • Listed to UL 498

Conductor

Number Of Wires	3-Wire Grounding
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Configuration

Cord Type	All Listed Portables
-----------	----------------------

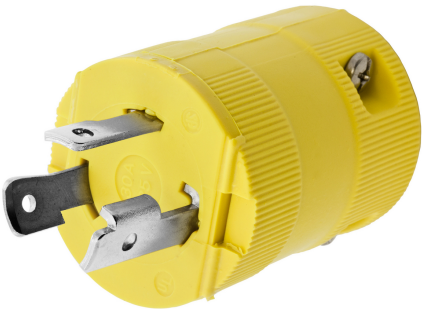

Current

Amperage Rating	30 A
Voltage Rating Description	125 VAC
Dielectric Strength	Withstands 2,000V minimum
Current Rating	30 A
Voltage Rating	125 VAC
Connectivity	Pressure Terminal Screws
Phase	Single Phase
Current / Amperage Rating	30 A

Dimensions

Length	2.5 in
Display Size	Standard Sized
Weight	0.20 lb.
Height	1.78 in
Width	1.78 in
Dimensions	2.5 in x 1.78 in x 1.78 in

General

Color	Yellow
Cord Range	0.590"-0.930" (15.0-23.6)
Specifications	• Blades - Brass - Nickel plated • Clamp Screws - #8 - 32 Stainless Steel - (Philips / Slotted / Robertson) • Housing - Yellow nylon • Terminal Clamps - Silicon Bronze - Nickel plated • Terminal Screws - #8 - 32 Stainless Steel (Philips / Slotted / Robertson)
Listings	• UL 498 • Fed.Spec. W-C-596 • CSA C22.2 No.42
UPC	783585808215
Material - Mounting Hardware	Cord Mounted
Item Type	30A Corrosion Resistant Valise® Plug
Material	Nylon

Logistics

Carton Quantity	10	Product Assets
Operational		Catalog [English]
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact	Catalog Page [English]
Horsepower - Maximum	2	Catalog Page [English]
		Installation Manual [English]
 A Hubbell brand		© 2026 Hubbell Incorporated. All rights reserved WDK_CA-HBL26CM11V-SPEC-EN REV 5/2026