

Switches and Lighting Controls, Mechanical Interlock, Replacement Parts, Replacement Ground Block, For 30A.

By Hubbell Wiring Device-Kellems
Catalog # [HBL30RGB](#)

Switches and Lighting Controls, Mechanical Interlock,
Replacement Parts, Replacement Ground Block, For 30A.

Features

- Replacement Parts
- Replacement Ground Block
- For 30A.


Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current voltage, Electrical - Dielectric Voltage - Withstands 3,000V Min, Electrical - Electrical - Operations, Environmental - Flammability - Meets UL 94V0 material classification, Environmental - Moisture Resistance - IP66 suitability, Environmental - Operating Temperature - Maximum continuous +75°C Minimum continuous -40°C, Environmental - UV Resistance - All exposed materials are UV stabilized, In accordance with UL 746C - Mechanical - Mounting, Mechanical - Product Identification - Identification and ratings are part of the external label and receptacle face, Mechanical - Terminal Identification - In accordance with UL, CSA, Mechanical 10,000 cycles, Electrical 6,000 cycles - Mechanical - Impact Resistance

Specifications

Standards - RoHS Compliance Status	CM
EU RoHS Indicator	Yes
Industry Standard(s)	• CSA Certified TYPE 4, 4X and TYPE 12K Enclosure Rating • Listed to UL Standard

Current

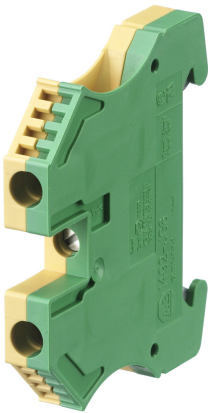

Dielectric Strength Phase	Withstands 2,000V minimum Three Phase
---------------------------	---------------------------------------

Dimensions

Weight	0.2 lb.
--------	---------

General

Style Series	Replacement Neutral Blocks • Non-Fused • Fused
UPC	783585955148
Type	Accessories
Item Type	Mechanical Interlock Replacement Ground Block

Logistics

Pallet Quantity	3350
Carton Quantity	5

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	7.5

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)