

Switches and Lighting Controls, Mechanical Interlock, Replacement Parts, Replacement Neutral Block, For 30A.

By Hubbell Wiring Device-Kellems
Catalog # [HBL30RNB](#)

Switches and Lighting Controls, Mechanical Interlock,
Replacement Parts, Replacement Neutral Block, For 30A.

Features


- Replacement Parts
- Replacement Neutral Block
- For 30A.

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current voltage, Electrical - Dielectric Voltage - Withstands 3,000V Min, Electrical - Electrical - Operations, Environmental - Flammability - Meets UL 94V0 material classification, Environmental - Moisture Resistance - IP66 suitability, Environmental - Operating Temperature - Maximum continuous +75°C Minimum continuous -40°C, Environmental - UV Resistance - All exposed materials are UV stabilized, In accordance with UL 746C - Mechanical - Mounting, Mechanical - Product Identification - Identification and ratings are part of the external label and receptacle face, Mechanical - Terminal Identification - In accordance with UL, CSA, Mechanical 10,000 cycles, Electrical 6,000 cycles - Mechanical - Impact Resistance

Specifications

Standards - RoHS Compliance	CM
Status	
Industry Standard(s)	• CSA Certified TYPE 4, 4X and TYPE 12K Enclosure Rating • Listed to UL Standard

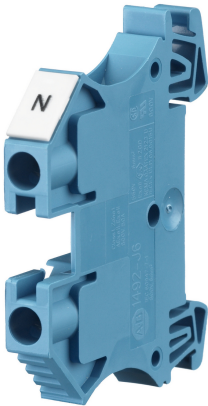

EU RoHS Indicator	Yes
Current	
Dielectric Strength	Withstands 3,000V minimum
Dimensions	
Weight	0.1 lb.
General	
Style	Replacement Neutral Blocks
UPC	783585162218
Type	Accessories
Item Type	Mechanical Interlock Replacement Neutral Block
Series	• Non-Fused • Fused
Operational	
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)