

Straight Blade Devices, 4-Plex Receptacle,  
Commercial Grade, Surge Protected, 20A  
125V, 2-Pole 3-Wire Grounding, 5-20R, Red

By Hubbell Wiring Device-Kellems  
Catalog # [HBL420HRS](#)

Straight Blade Devices, 4-Plex Receptacle, Commercial Grade, Surge  
Protected, 20A 125V, 2-Pole 3-Wire Grounding, 5-20R, Red

Features

- Mounts directly to 4-inch square box
- Heavy duty, impact resistant housing
- Removable knockouts for mounting
- Heavy duty, triple wipe, brass power and ground contacts

Application

4-Plex Hospital Grade

Performance

Electrical - Frequency - 60Hz, Electrical - Protection Modes - Normal and  
Common Modes, Electrical - Response Time - Approximately 5 ns,  
Electrical - Transient Suppression - Peak Energy (10 X 100 μs), Peak  
Current (8 X 20 μs), Electrical - Voltage - 20V AC + 10% - 15%,  
Environmental - Flammability - UL 94V-2, Environmental - Operating  
Temperature - -40°F to 140°F (-40°C to 60°C)

Specifications


|                          |                                                                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Environmental Conditions | Indoor Dry Unless Protected By<br>Additional Means                                                                                              |
| Nema Rating              | 5-20R                                                                                                                                           |
| Industry Standard(s)     | <ul style="list-style-type: none"><li>• Certified to CSA 22.2, No. 42<br/>File 285</li><li>• Listed to UL Standard 498 File<br/>E2186</li></ul> |

Conductor

|                 |                    |
|-----------------|--------------------|
| Number Of Wires | 3-Wire Grounding   |
| Wire Size       | #14 AWG to #12 AWG |
| Number Of Poles | 2-Pole             |

Current

|                            |       |
|----------------------------|-------|
| Amperage Rating            | 20 A  |
| Voltage Rating Description | 125 V |
| Current Rating             | 20 A  |

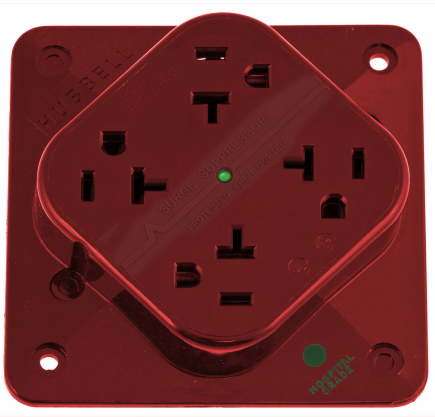

|                           |                            |
|---------------------------|----------------------------|
| Voltage Rating            | 125 V                      |
| Wattage                   | 2500 W                     |
| Connectivity              | Back Wired Screw Terminals |
| Phase                     | Single Phase               |
| Current / Amperage Rating | 20 A                       |

Dimensions

|              |                        |
|--------------|------------------------|
| Display Size | Standard Sized Product |
| Weight       | 0.25 lb.               |

General

|                              |                                                                                                                                                                                                                                       |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Color                        | Red                                                                                                                                                                                                                                   |
| Series                       | Hospital Grade                                                                                                                                                                                                                        |
| OEM Brand Name               | Hubbell Wiring Device-Kellems                                                                                                                                                                                                         |
| Specifications               | <ul style="list-style-type: none"><li>• Base Material - Lexan®</li><li>• Contact Design - Triple Wipe</li><li>• Face Material - Lexan®</li><li>• Mounting Screws - Brass</li><li>• Power Contacts - .032 in. (.8)<br/>Brass</li></ul> |
| UPC                          | 783585252353                                                                                                                                                                                                                          |
| Type                         | 4-Plex                                                                                                                                                                                                                                |
| Material - Mounting Hardware | Screw Mounting                                                                                                                                                                                                                        |
| Item Type                    | 4-PLEX                                                                                                                                                                                                                                |
| Material                     | Polycarbonate                                                                                                                                                                                                                         |

Logistics

|                 |   |
|-----------------|---|
| Carton Quantity | 5 |
|-----------------|---|

Product Assets

- [Catalog \[English\]](#)  
[Catalog Page \[English\]](#)  
[Catalog Page \[English\]](#)  
[Catalog Page \[English\]](#)  
[Catalog Page \[English\]](#)  
[Installation Manual \[Spanish, French, English\]](#)