

Straight Blade Male Plug, Insulgrip Heavy Duty, Industrial/Commercial, Straight, 2-Pole 3- Wire Grounding, 15A 125V, 5-15P, Blue/White, Single Pack

By Hubbell Wiring Device-Kellems
Catalog # [HBL5266CBL](#)

Straight Blade Devices, Male Plug, Insulgrip Heavy Duty, Industrial/Commercial Grade, Straight, 2-Pole 3- Wire Grounding, 15A 125V, 5-15P, Blue and White, Single Pack

Features

- Ribbed nylon housing is impact and chemical resistant
- VARI-SIZE adjustable cord clamp
- Fast lead assembly screws
- Beveled housing prevents snagging

Application

Industrial/Commercial Grade

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94 HB or better, Environmental - IP Suitability - IP20, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - #18-10 AWG. Standed copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications


Nema Rating	5-15P
Industry Standard(s)	• CSA Certified to C22.2 No. 42 File 280 • Fed. Spec. W-C596G • NEMA® WD-6 Compliant • UL Listed to UL498 File E1706

Conductor

Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	15 A
Voltage Rating Description	125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	15 A

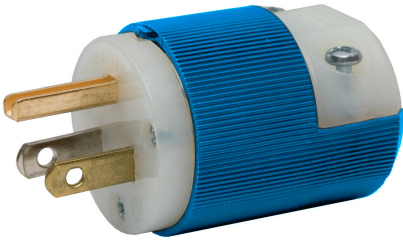

Voltage Rating	125 V
Phase	Single Phase
Current / Amperage Rating	15 A

Dimensions

Weight	0.15 lb.
--------	----------

General

Color	Blue, White
Style	Standard
Series	Insulgrip
Specifications	• Assembly Screws - Nickel plated steel • Blade Holder - Nylon • Blades - .060 in. (1.5) Brass • Housing/Cord Clamp - Nylon • Terminal Clamp - Nickel plated steel • Terminal Retainer - Clear Polycarbonate • Terminal Screws - #8-32 Brass , multiple drive
UPC	783585176314
Type	Plug
Item Type	Insulgrip Plug
Material	Polycarbonate

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	0.50

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)