
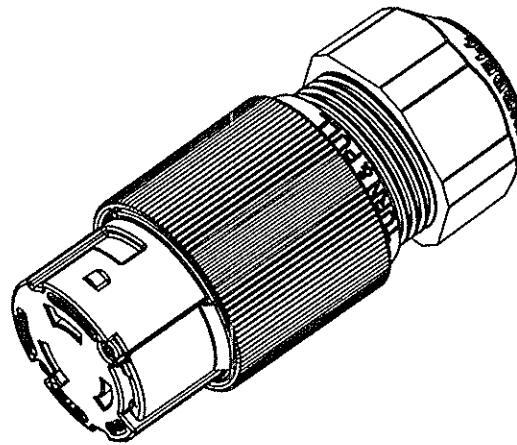
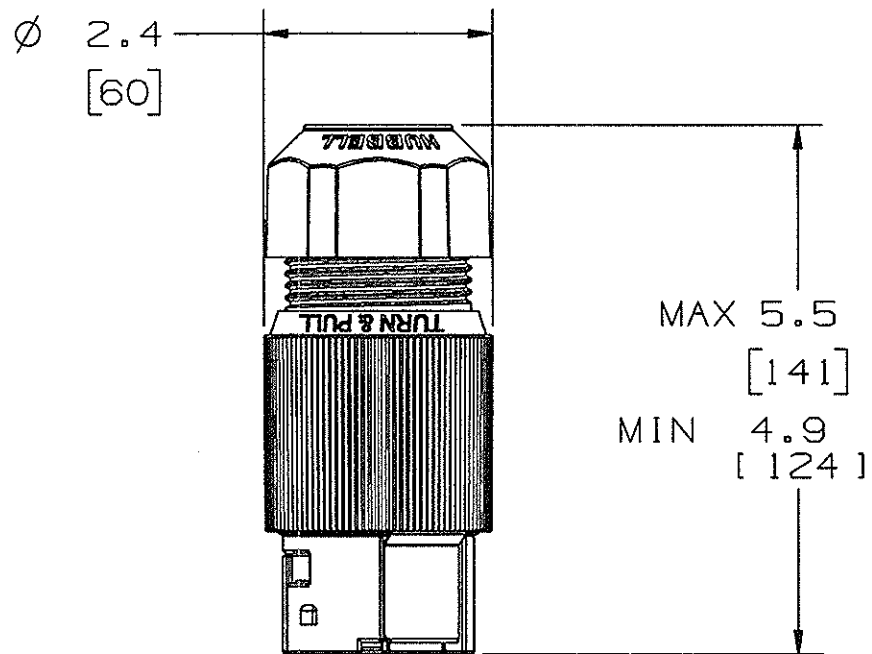


M-11748	3
---------	---

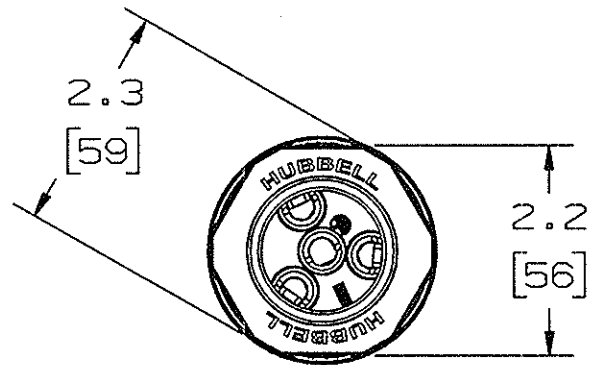

NOTES: UNLESS OTHERWISE SPECIFIED

1. UL LISTED & CSA CERTIFIED.
2. DIMENSIONS IN INCHES [mm]
3. TOLERANCES: $\pm .1$
4. CONDUCTOR & CABLE RANGE:
8/3+10/1 TO 4/4
.83"-1.25" [21.1-31.8 mm]
5. SOLID OR STRANDED COPPER WIRE ONLY

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON	YELLOW
CONNECTOR FACE	NYLON	YELLOW
TERMINAL COVER	NYLON	BLACK
NUT	PBT	GREY
DUST SHIELD	RUBBER	BLACK
CONTACTS	BRASS	NICKEL
ASSY RIVETS	BRASS	NICKEL
DIVIDER	POLYCARBONATE	BLACK
TERMINALS	COPPER	NICKEL
TERMINAL SCREWS	STAINLESS STEEL	
ASSY SCREWS	STAINLESS STEEL	
GROUND CONTACT	BRASS	NICKEL
GROUND SHUNT	BRASS	NICKEL

3	REVISED PARTS LIST PER DCN# 18483	MAM	11/29/2011
2	REVISED PARTS LIST PER DCN# 18362	MAM	10/19/2011
1	RELEASE PER DCN# 17251	TLS	2/7/2011
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE CONNECTOR, MARINE, HUBBELL PRO,
ANSI C73-110 / NEMA SS2-50,
50A, 125/250V

<del> TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS $\pm 1/64$ DECIMALS $\pm .005$ ANGLES $\pm 2^\circ$ </del>	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY MAM	APP. BY MAM
	TR. BY	SCALE 1/2
	CHK'D BY TLS	DATE 1/26/11

DIMENSION SHEET FOR CAT. NO. UBI 620ME41

DEBATABLE ☐ NON-DEBATABLE ☒

M-11748

W