

Watertight Devices, Twist-Lock® Duplex
Receptacle with Lift Cover, 15A, 250VAC, 2
Pole, 3 Wire, Thermoplastic elastomer,
NEMA L6-15R, Yellow.

By Hubbell Wiring Device-Kellems
Catalog # [HBL65W49D](#)

WATERTIGHT 15A/250V, L6-15 DUPLX REC

Features

- Impact resistant PBT lid, cover plate, and receptacle body
- Thermoplastic elastomer seal
- Stainless steel hardware and corrosion-resistant connection points


Performance

Electrical - Current Interrupting - Rated for current interruption per UL498, Electrical - Dielectric Voltage - 2500V AC, Electrical - Max Working Voltage - As marked, Electrical - Temperature Rise - 30°C max per UL498 at rated current, Environmental - UV resistance - All exposed materials are UV stabilized, Environmental - Moisture Resistance - UL Listed 4, 4X, 12, 6, 6P, Environmental - Operating Temperatures - -40°C (without impact) to +60°C continuous

Specifications

Nema Rating	L6-15R
Industry Standard(s)	• IP69K In Use • Meets NEMA WD-1, WD-6 And ANSI Standards
EU RoHS Indicator	Contact Manufacturer

Conductor

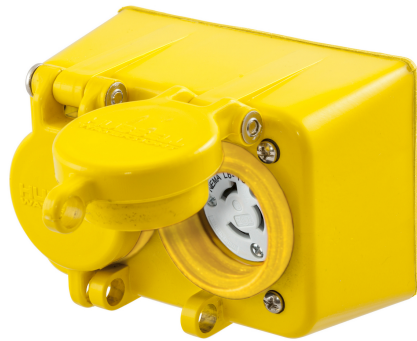

Number Of Poles	2-Pole
Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG

Current

Amperage Rating	15 A
Voltage Rating	250 V
Voltage Rating Description	250 V
Current / Amperage Rating	15 A

General

Color	Yellow
UPC	783585528755
Type	Duplex Receptacle
Item Type	15A Watertight Twist-Lock® Duplex Receptacle

Logistics

Carton Quantity	5
-----------------	---

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)