

Locking Devices, Twist-Lock®, Insul-Lock™
Connectors, 25 Amp, Power Out, Panel
Mount, Gray

By Hubbell Wiring Device-Kellems
Catalog # [HBLPMOGY](#)

INSUL-LOCK, PANEL MOUNT OUTLET, GRAY, 2

Features

- Impact Resistant Thermoplastic Construction
- Panel mount devices accept commonly available .25" Sta-Kon™ style connectors
- Industry standard mating

Performance


Electrical - Amperage - 15A, Electrical - Voltage - Upto 250V

Specifications

Standards - RoHS Compliance	CM
Status	
EU RoHS Indicator	Contact Manufacturer

Dimensions

Height	1.41 in
Width	0.75 in
Length	0.94 in
Dimensions	0.94 in x 0.75 in x 1.41 in

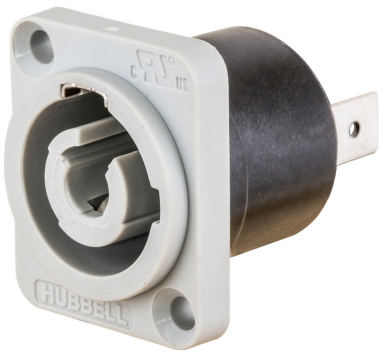

General

Listings	• cULus • UL Recognized Component rated up to 25A per UL 1977 • cUL Recognized Component rated up to 25A per Canadian National Standard C22.2 No. 182.3 • Suitable for use in UL 1640 applications
UPC	783585539119
Item Type	25 Amp Panel Mount Connectors

Logistics

Carton Quantity	50
-----------------	----

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)