HUBBELL
Wiring Device-Kellems

# Straight Blade Devices, Receptacles, Decorator Duplex, Commercial Grade, Corrosion Resistant, Smooth Face, 15A 125V, 2- Pole 3-Wire Grounding, 5-15R.

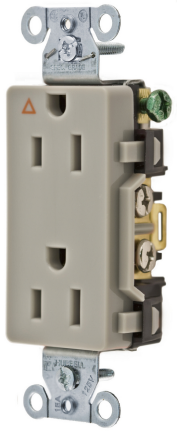

By Hubbell Wiring Device-Kellems
Catalog # IG15DRGRY

Straight Blade Devices, Receptacles, Decorator Duplex, Commercial Grade, Corrosion Resistant, Smooth Face, 15A 125V, 2- Pole 3-Wire Grounding, 5-15R, Back and Side Wired, Gray.

## Features

- Triangle marking on face indicates isolated ground
- Aesthetic Style Line® decorator design
- Triple wipe contacts

## Application

Commercial Grade

## Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94 V-2, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Product Identification - Ratings are a permanent part of the device, Mechanical - Terminal Accommodation - #14-#10 AWG copper stranded or solid conductor only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

## Specifications

| | |
|---|---|
| Environmental Conditions | Indoor Dry Unless Protected By Additional Means |
| EU RoHS Indicator | Yes |
| Nema Rating | 5-15R |
| Industry Standard(s) | • Certified to CSA C22.2, No. 42<br>• Fed. Spec. WC596<br>• NEMA® WD-6 Compliant<br>• UL Listed to UL498 File No. E2186 |

## Conductor

| | |
|---|---|
| Number Of Wires | 3-Wire |
| Wire Size | #14 AWG to #10 AWG |
| Number Of Poles | 2-Pole |

## Current

| | |
|---|---|
| Amperage Rating | 15 A |
| Voltage Rating Description | 125 V |
| Dielectric Strength | Withstands 2,000V minimum |
| Current Rating | 15 A |
| Voltage Rating | 125 V |
| Wattage | 1875 W |
| Connectivity | Back and Side Wired Screw Terminals |
| Phase | Single Phase |
| Current / Amperage Rating | 15 A |

## Dimensions

| | |
|---|---|
| Length | 1.29 in |
| Display Size | Standard Sized Product |
| Weight | 0.15 lb. |
| Height | 3.28 in |
| Width | 0.83 in |
| Dimensions | 1.29 in x 0.83 in x 3.28 in |

## General

| | |
|---|---|
| Color | Gray |
| Style | Style Line Decorator |
| Series | Commercial Specification Grade |
| Specifications | • Automatic Self-grounding Staple - Stainless steel<br>• Base - Nylon<br>• Face - Nylon<br>• Ground Contacts - Brass<br>• Mounting Screws - Galvanized Steel<br>• Mounting Strap - .040 in. (1) Galvanized steel<br>• Power Contacts - .030 in. (.8) Brass<br>• Terminal Screws - Plated steel<br>• Wire Clamp - .062 in. (1.6) Nickel plated steel |
| UPC | 783585146881 |
| Type | Standard Duplex |
| Material - Mounting Hardware | Screw Mounting |
| Item Type | Decorator Duplex |
| Material | Nylon |

## Logistics

| | |
|---|---|
| Carton Quantity | 10 |

## Operational

| | |
|---|---|
| Operating Temperature | Maximum continuous 75°C and minimum -40°C without Impact |
| Horsepower - Maximum | 0.5 |

## Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]
Installation Manual [Spanish, French, English]



© 2026 Hubbell Incorporated. All rights reserved