

EdgeConnect™ Twist-Lock® Series, Locking
Devices, Isolated Ground, 15A 125V, Orange

By Hubbell Wiring Device-Kellems
Catalog # [IG4700AST](#)

Locking Devices, EdgeConnect™ Twist-Lock®, Industrial, Duplex
Receptacle, Isolated Ground, 15A 125V, 2-Pole 3-Wire Grounding, L5-
15R, Screwless Terminal, Orange

Features

- Faster termination time
- No need for screwdriver and torque wrench
- Spring Termination eliminates strand relaxation
- Funnel shaped wire entry for ease of termination.

Application

Industrial

Specifications


Environmental Conditions	IP20 Suitability
Nema Rating	L5-15R
Industry Standard(s)	• Listed to UL 498, Fed.Spec. W-C-596, Certified to CSA C22.2 No.42 • WR Rating

Conductor

Number Of Wires	3
Number Of Poles	2
Contact	Brass

Current

Dielectric Strength	Withstands 2,000V minimum
Current Interrupting	Certified for current interrupting at full rated current
Voltage Rating	125 VAC
Phase	Single Phase
Current / Amperage Rating	15 A

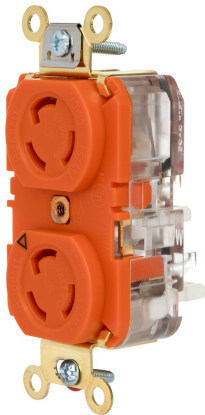

Dimensions

Weight	0.29 lb.
Size	Standard Sized Product

General

U_Face	Polycarbonate
Color	Orange
Style	Locking Devices
Series	EdgeConnect™ Twist-Lock® Series
Mounting Type	Screw Mount
UPC	783585730882
Type	Receptacle
Material	Nylon
U_Flammability	HB or better per UL94/CSA 22.2 No.0.17

Logistics

Pallet Quantity	3200
Carton Quantity	10

Operational

Temperature Rating	Maximum Continuous 75°C, Minimum -40°C (w/o impact)
--------------------	--

Product Assets

- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[Spanish, French, English\]](#)