

Straight Blade Devices, Isolated Ground, Receptacles, Duplex, Commercial/Industrial Grade, 2-Pole 3-Wire Grounding, 20A 125V, 5-20R

By Hubbell Wiring Device-Kellems
Catalog # [IG5362I](#)

Straight Blade Duplex Isolated Ground Receptacle 20A

Features

- Triangle marking on face indicates isolated ground
- Slender compact design
- Finder Groove Face

Application

Extra Heavy Duty Specification Grade

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - Top: UL 94V-2, Base: UL 94V-0, Environmental - Operating Temperatures - Maximum continuous 75°C, minimum -40°C (w/o impact), Mechanical - Product Identification - Ratings are a permanent part of the device, Mechanical - Terminal Accommodation - #12-#10 AWG stranded or solid copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications


Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Nema Rating	5-20R
Industry Standard(s)	• Certified to CSA, C22.2, No. 42 File 285 • Fed. Spec. WC596 • NEMA® WD-6 Compliant • UL Listed to UL498 File No. E2186

Conductor

Number Of Wires	3-Wire
Wire Size	#12 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	20 A
Voltage Rating Description	125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	20 A
Voltage Rating	125 V

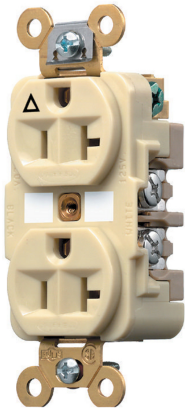

Wattage	2500 W
Connectivity	Back and Side Wired Screw Terminals
Phase	Single Phase
Current / Amperage Rating	20 A

Dimensions

Length	3.28 in
Display Size	Standard Sized Product
Weight	0.25 lb.
Height	1.05 in
Width	1.33 in
Dimensions	3.28 in x 1.33 in x 1.05 in

General

Color	Ivory
Style	Finder Groove Face
Series	Heavy Duty
Specifications	• Automatic Self-grounding Clip - Stainless steel • Base - PBT • Clamp - Nickel plated steel • Contacts - 0.031" (0.8) Brass • Face - Nylon • Mounting Screws - Zinc plated steel • Mounting Strap - .050 in. (1.3) Brass • Terminal Screws - Brass
UPC	783585876887
Type	Standard Duplex
Material - Mounting Hardware	Screw Mounting
Item Type	Traditional Duplex
Material	Nylon

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	1

Product Assets

- Catalog [English]
 - Catalog Page [English]
 - Catalog Page [English]
 - Installation Manual [French, English]
-



A Hubbell brand