


HUBBELL Wiring Device

[Non-Metallic Raceway, BaseTrak, 2 or 3 Channel, 2-Gang, Flush, Inline Box](#)

By Hubbell Wiring Device-Kellems

Catalog # [PB2IND2G](#)

Non-Metallic Raceway BaseTrak, 2 or 3 Channel, Double, Flush, Inline Box

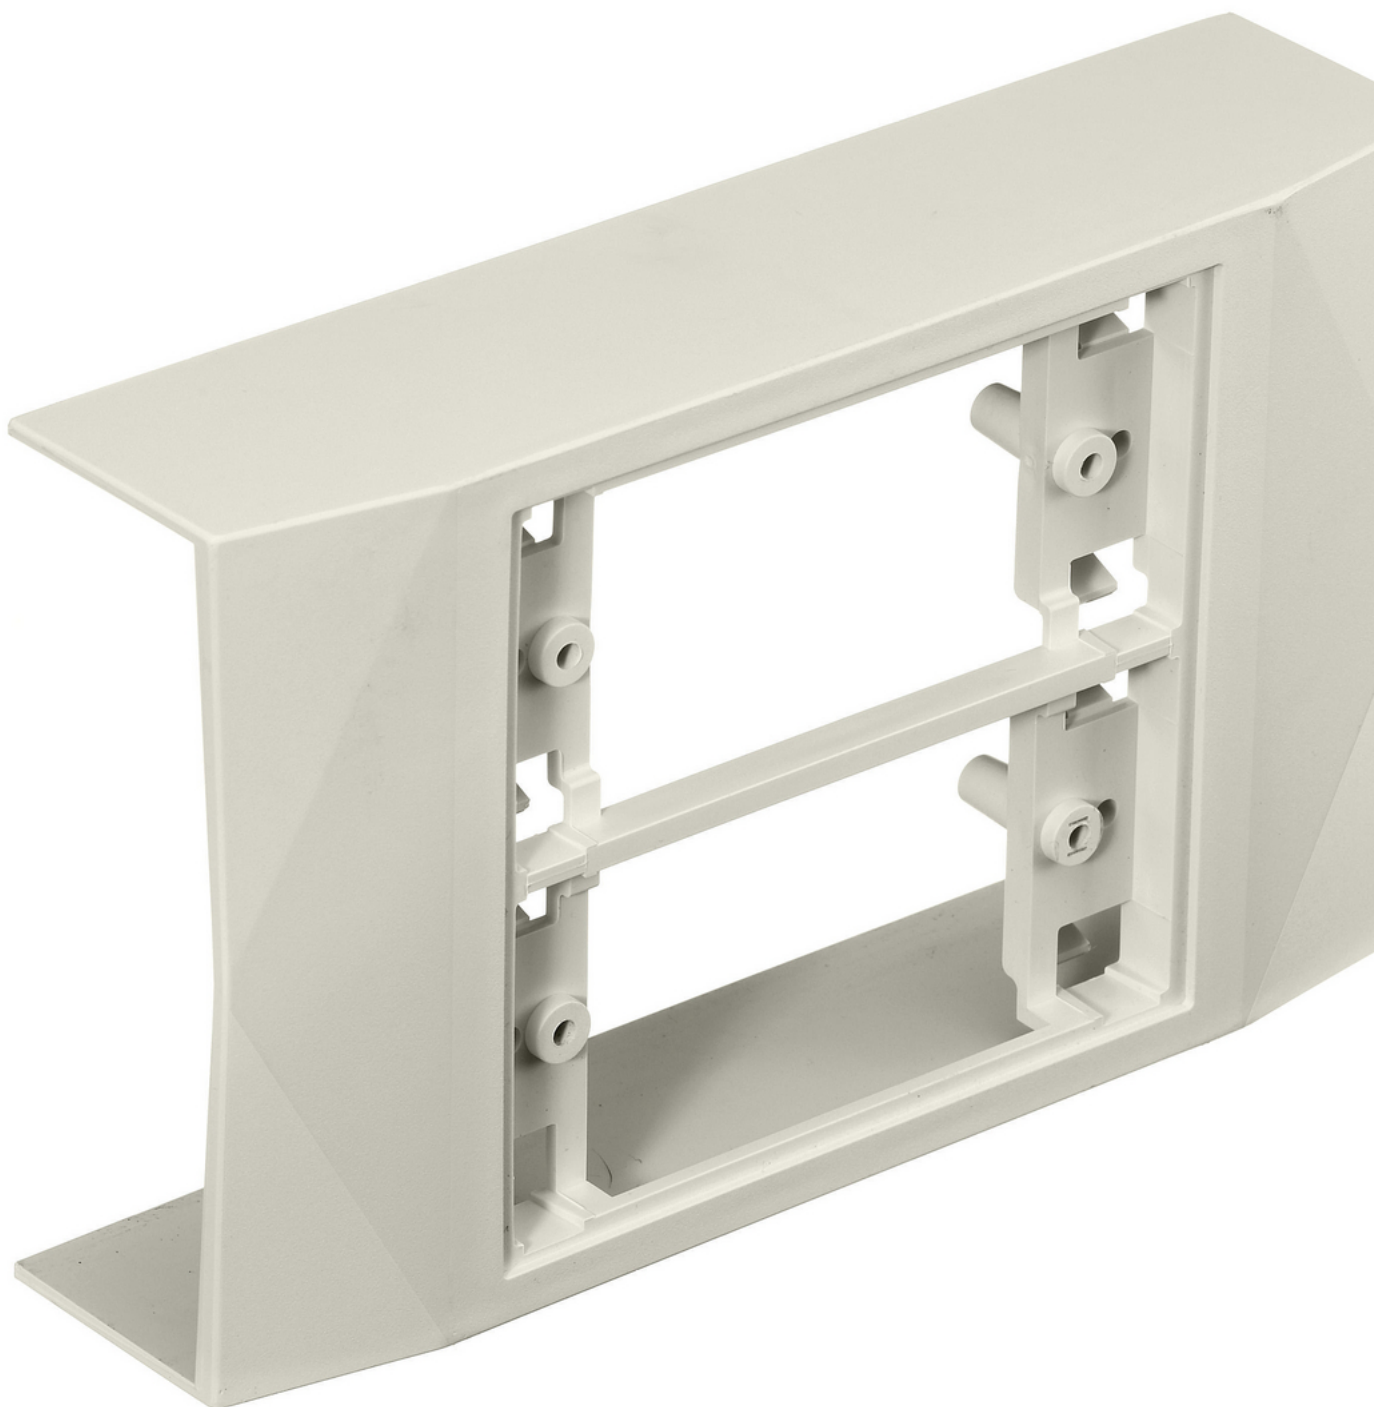

Features

- Reduces inventory requirements
- Eliminates need to order three separate boxes
- Boxes available in low, standard and deep profiles

Application

2-Gang Inline Device Box

Performance

Environmental - Flame Rating - UL94V-0, Environmental - Temperature Range - -25.6° to 158° F

Specifications

EU RoHS Indicator
Contact Manufacturer
Industry Standard(s)
UL 5A

Configuration

Number of Gang(s)
2-Gang

General

Color
Office White
Style
In-Line
Sub Brand
Non-Metallic Raceway
Series
PB2
Specifications

- Crush Resistance - 300 lbs.
- Impact Resistance - 5 ft. lbs.
- Material - UV Stabilized PVC

UPC
783585310114
Type
Boxes
Item Type
PB2 BaseTrak Series
Cover Type
Removable

Logistics

Pallet Quantity
320
Carton Quantity
10

Product Assets

[Catalog.\[English\]](#)
[Catalog Page.\[English\]](#)
[Installation Manual.\[Spanish, French, English\]](#)



A Hubbell brand
© 2026 Hubbell Incorporated. All rights reserved
WDK_CA-PB2IND2G-SPEC-EN | REV 5/2026