

Non-Metallic Raceway, BaseTrak Series, 2-Gang, Full Capacity Raised Box

By Hubbell Wiring Device-Kellems
Catalog # [PB3FCIB2G](#)

Non-Metallic Raceway BaseTrak, 2-Gang, Full Capacity Raised Box

Features

- Reduces inventory requirements
- Eliminates need to order three separate boxes
- Boxes available in low, standard and deep profiles

Performance


Environmental - Flame Rating - UL94V-0, Environmental - Temperature Range - -25.6° to 158° F

Specifications

Standards - RoHS Compliance	CM
Status	
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A
EU RoHS Indicator	Contact Manufacturer

Configuration

Number of Gang(s)	2-Gang
-------------------	--------

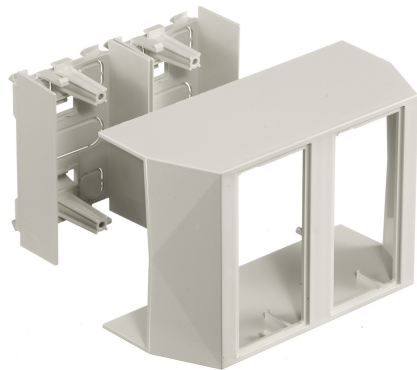

General

Specifications	• Crush Resistance - 300 lbs. • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
Color	Office White
Style	Full Capacity
UPC	783585090955
Type	Boxes
Item Type	PB3 BaseTrak Series
Series	PB3

Logistics

Carton Quantity	10
-----------------	----

Product Assets

- [Catalog \[English\]](#)
[Catalog Page \[English\]](#)
[Installation Manual \[Spanish, French, English\]](#)