

Non-Metallic Raceway, BaseTrak, 2 or 3
Channel, Flat Elbow, Base and Cover

By Hubbell Wiring Device-Kellems
Catalog # [PB3FEBCA](#)

Non-Metallic Raceway, BaseTrak, 2 or 3 Channel, Flat Elbow, Base
and Cover

Features

- Full capacity 1¼ in. bend radius flat elbow

Application

Flat Elbow Base and Cover

Performance


Environmental - Flame Rating - UL94V-0, Environmental -
Temperature Range - -25.6° to 158° F

Specifications

Standards - RoHS Compliance	CM
Status	
EU RoHS Indicator	Contact Manufacturer
Industry Standard(s)	UL 5A

General

Color	Office White
Style	Flat

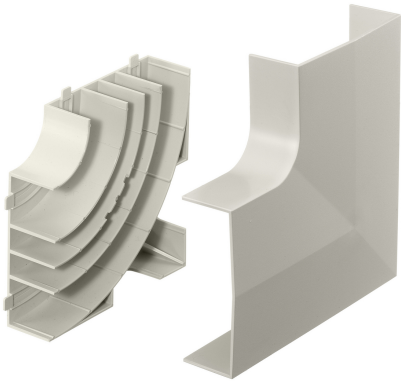

Sub Brand	Non-Metallic Raceway
Series	• PB2 • PB3
Specifications	• Crush Resistance - 300 lbs. • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
UPC	783585310091
Type	Elbows
Item Type	PB2 and PB3 BaseTrak Series
Material	Non-Metallic
Cover Type	Removable

Logistics

Carton Quantity	10
-----------------	----

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[Spanish, French, English\]](#)