


Non-Metallic Replacement Cover, Brown

By Hubbell Wiring Device-Kellems
Catalog # [PFBRCBRA](#)

Non-Metallic Replacement Cover

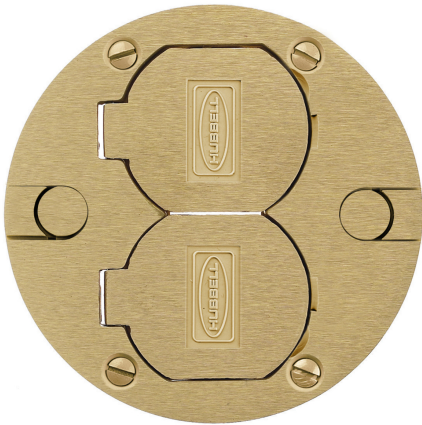

Features

- Top Service Fitting with Prewired 20A Duplex Receptacle
- 2-Installed Cat 6 Hubbell Xcelerator Jacks
- Non-metallic Cover with Painted Aluminum Flange

Specifications

- | | |
|----------------------|---|
| Industry Standard(s) | <ul style="list-style-type: none">• cULus Listed• Meets ADA Standards• UL 514A Listed |
|----------------------|---|

Configuration

- | | |
|-------------------|---|
| Knockouts | Duplex Flip Covers and (2) 1/2" Diameter Holes for Low Voltage Wiring |
| Number Of Outlets | (1) Duplex Opening and (2) 1/2" Diameter Holes for Low Voltage Wiring |

Dimensions

- | | |
|--------|---------|
| Weight | 0.3 lb. |
|--------|---------|

General

Specifications

- Carpet Flange - Painted Cast Aluminum/Solid Brass, Brushed and Lacquered
- Cover Material - Thermoplastic
- Floor thickness - 2 1/4 in. to 7 in. (57.2 to 177.8)
- Housing - Engineered flame-retardant thermoplastic
- Jack(s) - Low voltage Knockouts Only

- | | |
|------------------------------|--------------------------------------|
| UPC | 783585342542 |
| Material - Mounting Hardware | Mounting Hardware Included |
| Item Type | 3" Fire-Rated Poke Through Component |
| Finish Type | Brown |

Logistics

- | | |
|-----------------|----|
| Carton Quantity | 10 |
|-----------------|----|

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[French, English\]](#)