

Non-Metallic Raceway, PolyTrak Series,
PREMISE-TRAK, PLUGTRAK, Lighting
Fixture Box

By Hubbell Wiring Device-Kellems
Catalog # [PT12LFB](#)

Non-Metallic Raceway, PolyTrak Series, PREMISE-TRAK,
PLUGTRAK, Lighting Fixture Box

Features

- Reduces inventory requirements
- Eliminates need to order three separate boxes
- Boxes available in low, standard and deep profiles

Performance


Environmental - Flammability - UL94V-0, Environmental -
Operating Temperature - -25.6° to 158° F

Specifications

EU RoHS Indicator	Contact Manufacturer
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A

General

Color	Office White
-------	--------------

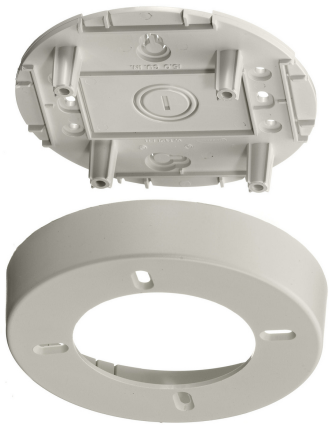

Style	Round
Series	PT1
Specifications	• Crush Resistance - 300 lbs • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
UPC	783585337869
Type	Boxes
Item Type	PT1 PremiseTrak Series

Logistics

Pallet Quantity	1040
Carton Quantity	5

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[English\]](#)