

Non-Metallic Raceway, Latching WallTrak,
WALLTRAK2, Base and Cover, Flat Elbow

By Hubbell Wiring Device-Kellems
Catalog # [PW2FEBC](#)

Non-Metallic Raceway Latching WallTrak, WALLTRAK2,Base and
Cover, Flat Elbow

Features

- Full capacity 1¼ in. bend radius external elbow

Performance


Environmental - Flame Rating - UL94V-0, Environmental -
Temperature Range - -25.6° to 158° F

Specifications

Standards - RoHS Compliance	CM
Status	
EU RoHS Indicator	Contact Manufacturer
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A

General

Color	Office White
-------	--------------

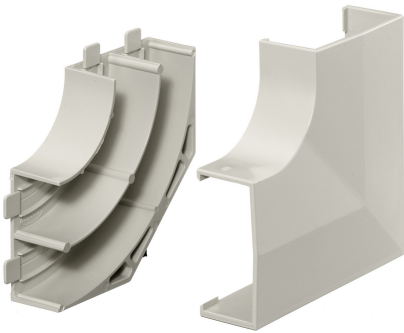

Style	Flat
Series	PW2
Specifications	• Crush Resistance - 300 lbs. • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
UPC	783585090689
Type	Elbows
Item Type	PW2 WallTrak (Latching) Series
Material	Non-Metallic

Logistics

Carton Quantity	10
-----------------	----

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[Spanish, French, English\]](#)