
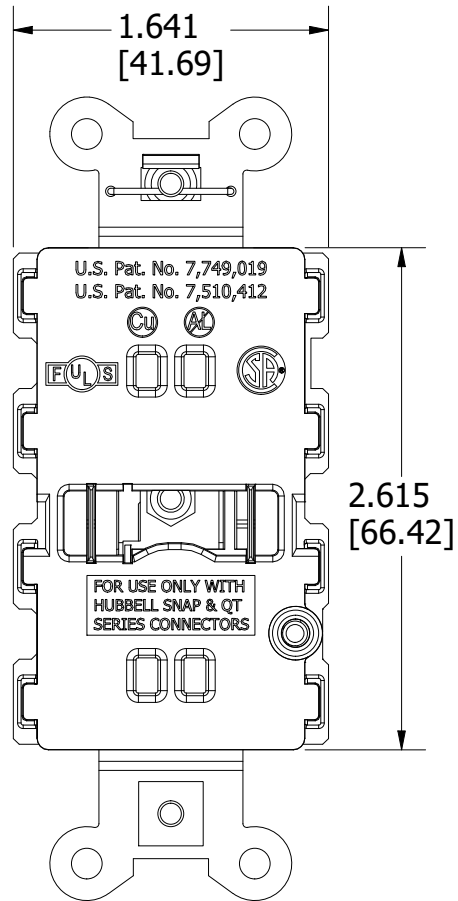
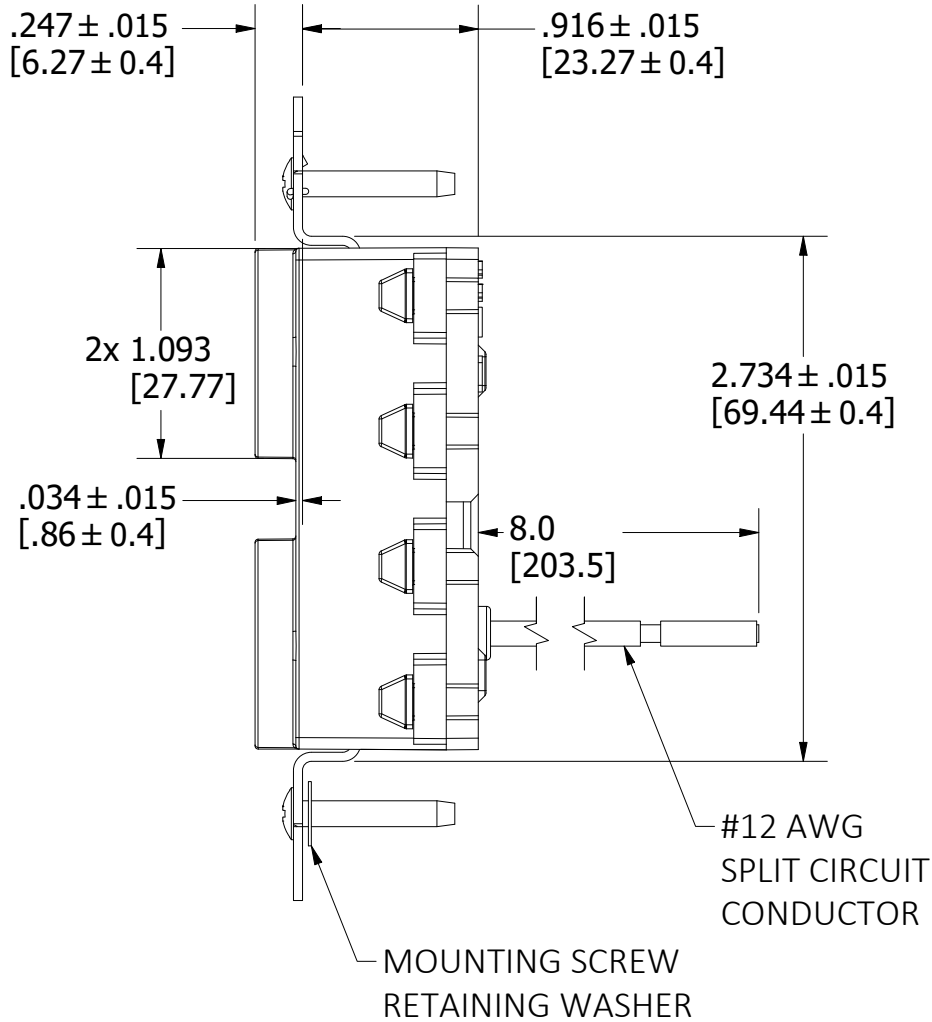


M-14970

1

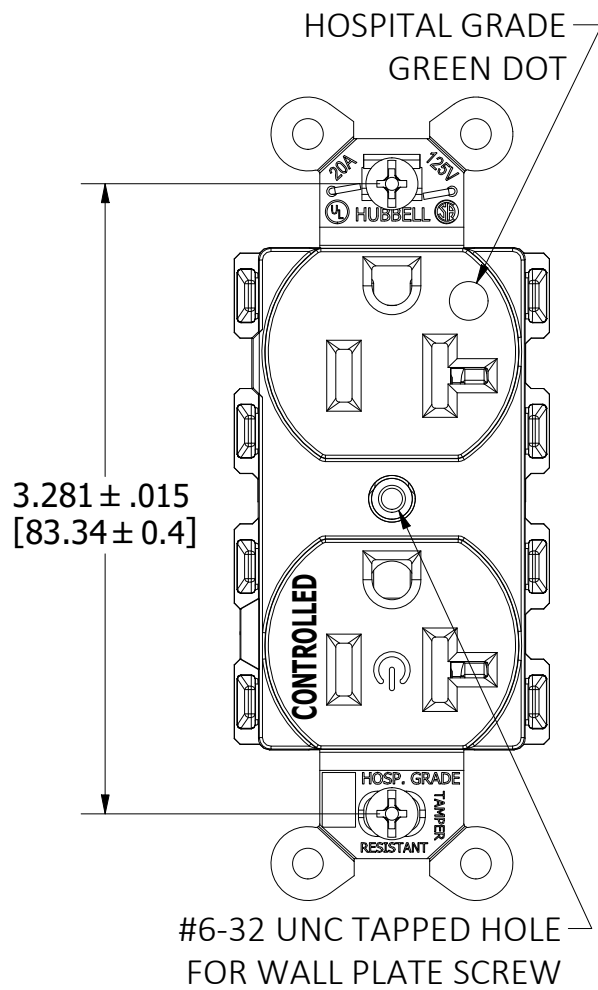

RATING	IVORY	GRAY	WHITE	RED
20A	SNAP8300C1IVTRA	SNAP8300C1GYTRA	SNAP8300C1WTRA	SNAP8300C1RTRA

- NOTES:
- DIMENSIONS ARE IN INCHES [MM].
 - ALL DEVICES UL LISTED AND CSA CERTIFIED.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
TOP	NYLON 6/6	SPI A-3
BASE	NYLON 6/6	SPI A-3
LINE CONTACTS	BRASS	
GROUND CONTACT	BRASS	
BRIDGE	.04 STEEL	
STAPLE	ST. STEEL	
WASHER	PVC FILM	BLACK
MOUNTING SCREWS	STEEL	ZINC PLT
WIRE LEAD, PRE-STRIPPED, RED, 12 AWG, 8" LENGTH		

1	INITAL RELEASE PER ECN 250725050140	JCR	7/31/25
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
CONTROLLED DUPLEX RECEPTACLE,
20A 125V SC, TR ONLY, HG

		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°	DR. BY JCR	SCALE 1 : 1	
	CHK. BY	DATE 7/31/2025	

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

B

M-14970

1