

2014



NEXTWAVETM
RECESSED DOWNLIGHTING



Nextwave Mission

At Nextwave™, a Topaz® Company, our mission is to be the leading alternative solution for supplying a wide range of quality lighting fixtures. Our goal is to be the easiest company in the industry to do business with by offering powerful solutions and award winning friendly service.

The Topaz Difference

At Topaz you get a personal assistant assigned to your account. A single point of contact to rely on to get 100% of your needs met...fast. In addition to our award winning service, we are committed to providing you with:

VALUE PRICING – As a manufacturer, we believe in providing you with quality products, value priced, so that both you and your customers can benefit and grow your businesses.

DIRECT SHIPMENTS – There are times when your customer may need a product in a hurry. At your request, we will ship directly to your customers from our warehouse.

Topaz also delivers key value-added services to make sure you can serve your customers better.



We are well known for the depth and breadth of our inventory. FullFill reflects our promise that we can fill over 99% of the orders we receive from existing inventory.



Just give us your order by 4PM and in most cases, we will get your order out before 5PM on the same day.



Topaz will not sell any Nextwave fixtures to your customer or your customer's customer! We protect your relationship...period.



Thank you for choosing Nextwave, a Topaz company, for your downlighting needs.

Charles Stover
General Manager, Nextwave



Table of Contents

LED

4" Retrofit Modules	8
5"/6" Retrofit Modules	9
4"	10 - 12
6"	13 - 15

Architectural Compact Fluorescent

4"	18 - 21
6"	22 - 27
8"	28 - 34

Compact Fluorescent

4"	38 - 42
5"	43 - 48
6"	49 - 61

GU24

4"	64 - 66
5"	67 - 69
6"	70 - 73

Line Voltage

4"	76 - 80
5"	81 - 84
6"	85 - 103
6" for Sloped Ceilings	104 - 109

GU10

4"	112 - 119
--------------	-----------

Low Voltage

3"	122 - 125
4"	126 - 135

Compact Fluorescent Emergency and Dimming Ballast

6"	138
8"	139 - 141

Accessories 144 - 145

Index 148 - 150

Cross References 151 - 153

Nomenclature. 154

Terms and Conditions 155

Warranty 155





LED

4" Dimmable LED Downlight Retrofit with Adjustable White Baffle

RTLED/RETRO/4/D

PRODUCT SPECIFICATIONS

LED ENGINE

Dimmable to 10% with standard dimmer*

Heat sink and aluminum board for low heat operation of high power SMD LED chip.

Use 1.2W High power SMD LED

3000K (± 200)

Produce 600 lumens output from luminaire, operating by 300mA current.

LED POWER SUPPLY DRIVER

Voltage: 120V, 50-60Hz

Current: 300mA

Power Consumption: 9 Watts

Operation Temperature: -20°C to 50°C ambient temp (4°F to 122°F)

*Works with most dimmers -

to confirm contact Topaz at 888-551-2852, ext 240.



INSTALLATION

For use in new construction, remodel and existing housings.

FEATURES

Fits most 4" Recessed Housings

Includes E26 Med. Base Socket Adapter (GU24 Adapter optional)

Built-in LED Driver

Long Life 35,000 hours at 70% lumen maintenance

Save 75% compared to incandescent sources

3000K CCT

600 Lumens


84 CRI

120V, 50-60Hz

9 Watts

No tools required for installation

20° Adjustable Baffle

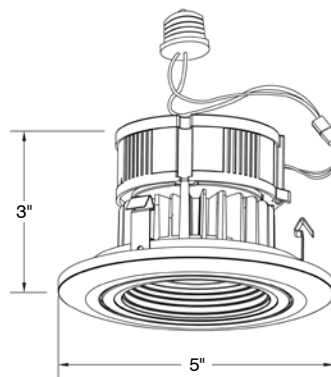

LABELS AND LISTINGS

ETL Listed

RoHS Compliant

ENERGY STAR Qualified

Meets TITL 24 Requirements



**If used with available GU24 adapter



ORDERING INFORMATION

Code: 79558

Item # RTLED/RETRO/4/D

Optional GU24 Socket Adapter:

Code: 79560

Item # RTLED/RETRO/GU24

5"/6" Dimmable LED Downlight Retrofit with Adjustable White Baffle

RTLED/RETRO/6/D

PRODUCT SPECIFICATIONS

LED ENGINE

Dimmable to 10% with standard dimmer*

Heat sink and aluminum board for low heat operation of high power SMD LED chip.

Use 1.2W High power SMD LED

3000K (± 200)

Produce 1000 lumens output from luminaire, operating by 450mA current.

LED POWER SUPPLY DRIVER

Voltage: 120V, 50-60Hz

Current: 450mA

Power Consumption: 14 Watts

Operation Temperature: -20°C to 50°C ambient temp (4°F to 122°F)

*Works with most dimmers -

to confirm contact Topaz at 888-551-2852, ext 240.



INSTALLATION

For use in new construction, remodel and existing housings.

FEATURES

Fits most 5"/6" Recessed Housings

Includes E26 Med. Base Socket Adapter (GU24 Adapter optional)

Built-in LED Driver

Long Life 35,000 hours at 70% lumen maintenance

Save 75% compared to incandescent sources

3000K CCT

1000 Lumens


84 CRI

120V, 50-60Hz

14 Watts

No tools required for installation

20° Adjustable Baffle

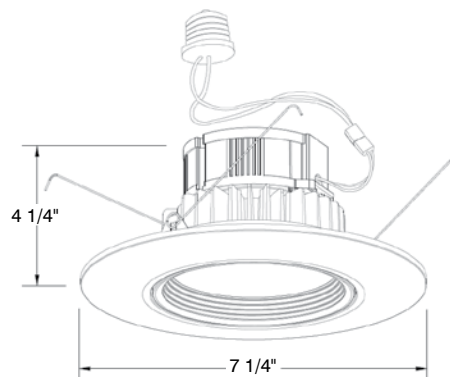

LABELS AND LISTINGS

ETL Listed

RoHS Compliant

ENERGY STAR Qualified

Meets TITL 24 Requirements



**If used with available GU24 adapter



ORDERING INFORMATION

Code: 79559

Item # RTLED/RETRO/6/D

Optional GU24 Socket Adapter:

Code: 79560

Item # RTLED/RETRO/GU24

4" LED Recessed Can

New Construction LED IC Airtight

RH4/NLED/IC/AT



PRODUCT SPECIFICATIONS

MOUNTING FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

QUICK CONNECT

Features Quick Connects for use with LED Trim Modules.


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Hanger bars are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

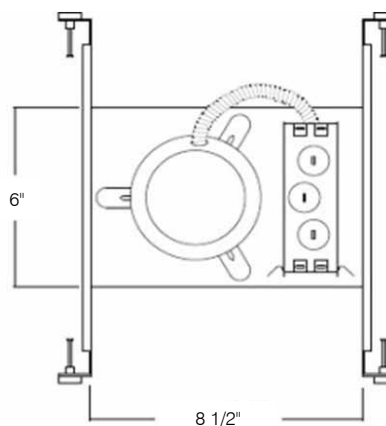


LABELS AND LISTINGS

UL Listed for Damp Locations

UL Listed for Feed Through Wiring

Certified under ASTM-E283 for Airtight construction

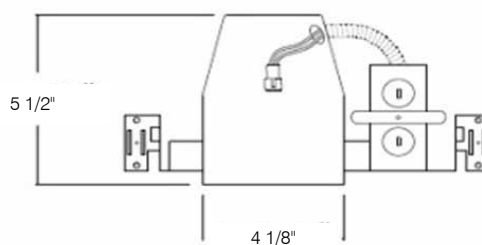

ORDERING INFORMATION

Code: 79990

Item # RH4/NLED/IC/AT

4" LED Recessed Can

Remodel Construction LED IC Airtight

RH4/RLED/IC/AT

PRODUCT SPECIFICATIONS

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

QUICK CONNECT


Features Quick Connects for use with LED Trim Modules.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

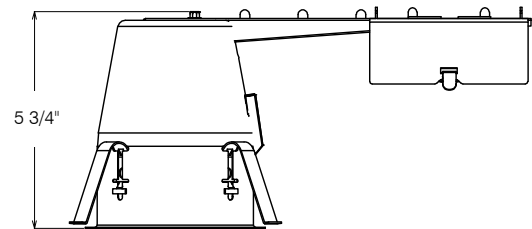

LABELS AND LISTINGS

UL Listed for Damp Locations

UL Listed for Feed Through Wiring


Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 79991

Item # RH4/RLED/IC/AT

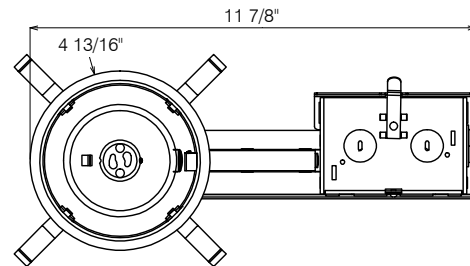

4" Dimmable LED Retrofit

White Baffle with White Trim

RTL/RF/433WH/WH/D

PRODUCT SPECIFICATIONS

LED ENGINE

11 Watts. 650 Lumens. 59 Lumen/Watt. 3000K CCT. 82+ CRI

LED POWER SUPPLY DRIVER

Built-in potted driver for cooler operation. Dimmable to 5% with standard dimmers. 350 Ma, 120V, 50-60Hz

FEATURES

Fits most 4" recessed cans. 35,000 hours at 70% lumen maintenance. Tested in accordance with IESNA LM79 & LM80. Includes medium base socket adaptor. Optional GU24 adaptor available. No tools required for installation. Save 75% compared to incandescent sources.


LABELS AND LISTINGS

UL Listed

UL Listed for Wet Locations

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 70970

Item # RTL/RF/433WH/WH/D

RTL/RF/443WH/WH/D

PRODUCT SPECIFICATIONS

LED ENGINE

11 Watts. 723 Lumens. 66 Lumen/Watt. 4000K CCT. 82+ CRI

LED POWER SUPPLY DRIVER

Built-in potted driver for cooler operation. Dimmable to 5% with standard dimmers. 350 Ma, 120V, 50-60Hz

FEATURES

Fits most 4" recessed cans. 35,000 hours at 70% lumen maintenance. Tested in accordance with IESNA LM79 & LM80. Includes medium base socket adaptor. Optional GU24 adaptor available. No tools required for installation. Save 75% compared to incandescent sources.


LABELS AND LISTINGS

UL Listed

UL Listed for Wet Locations

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 70971

Item # RTL/RF/443WH/WH/D

6" LED Recessed Can

New Construction LED IC Airtight

RH6/NLED/IC/AT

PRODUCT SPECIFICATIONS

MOUNTING FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

QUICK CONNECT

Features Quick Connects for use with LED Trim Modules.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Hanger bars are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

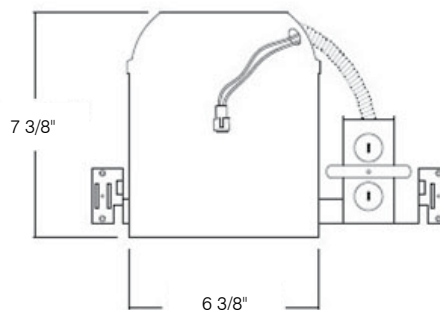


LABELS AND LISTINGS

UL Listed for Damp Locations

UL Listed for Feed Through Wiring

Certified under ASTM-E283 for Airtight construction

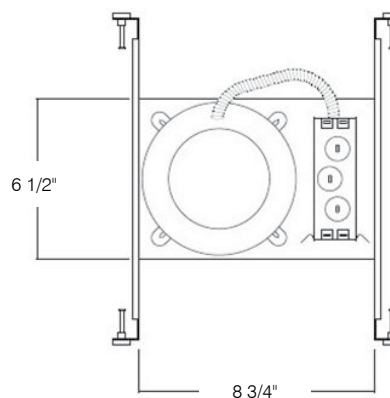

ORDERING INFORMATION

Code: 79992

Item # RH6/NLED/IC/AT

6" LED Recessed Can

Remodel Construction LED IC Airtight

RH6/RLED/IC/AT

PRODUCT SPECIFICATIONS

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

QUICK CONNECT


Features Quick Connects for use with LED Trim Modules.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

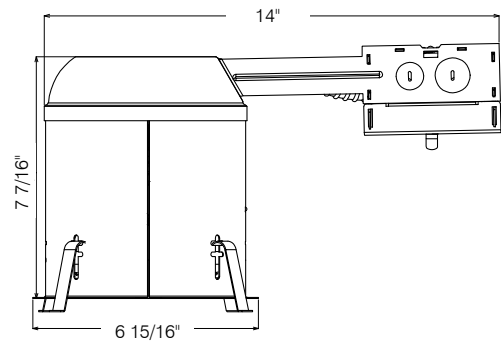

LABELS AND LISTINGS

UL Listed for Damp Locations

UL Listed for Feed Through Wiring


Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 79993

Item # RH6/RLED/IC/AT

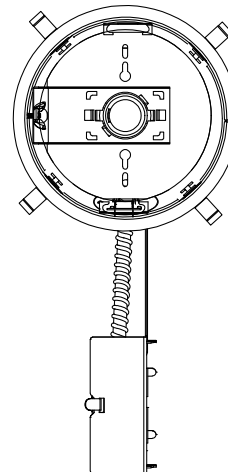

5"/6" Dimmable LED Retrofit

White Baffle with White Trim

RTL/RF/633WH/WH/D

PRODUCT SPECIFICATIONS

LED ENGINE

16 Watts. 1,100 Lumens. 69 Lumen/Watt. 3000K CCT. 82+ CRI

LED POWER SUPPLY DRIVER

Built-in potted driver for cooler operation. Dimmable to 5% with standard dimmers. 700 Ma, 120V, 50-60Hz

FEATURES

Fits most 5"/6" recessed cans. 40,000 hours at 70% lumen maintenance. Tested in accordance with IESNA LM79 & LM80. Includes medium base socket adaptor. Optional GU24 adaptor available. No tools required for installation. Save 75% compared to incandescent sources.



LABELS AND LISTINGS

UL Listed

UL Listed for Wet Locations

ENERGY STAR Qualified

Meets TITLE 24 Requirements

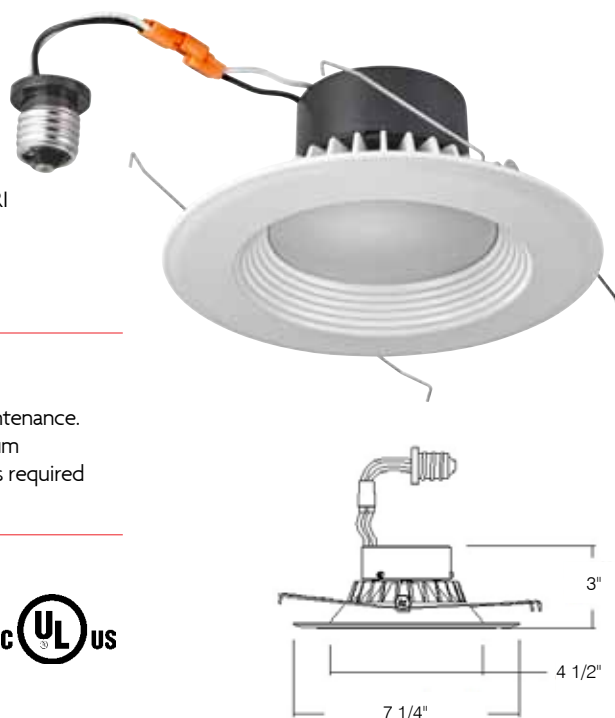

ORDERING INFORMATION

Code: 70972

Item # RTL/RF/633WH/WH/D

RTL/RF/643WH/WH/D

PRODUCT SPECIFICATIONS

LED ENGINE

16 Watts. 1,248 Lumens. 78 Lumen/Watt. 4000K CCT. 82+ CRI

LED POWER SUPPLY DRIVER

Built-in potted driver for cooler operation. Dimmable to 5% with standard dimmers. 700 Ma, 120V, 50-60Hz

FEATURES

Fits most 5"/6" recessed cans. 40,000 hours at 70% lumen maintenance. Tested in accordance with IESNA LM79 & LM80. Includes medium base socket adaptor. Optional GU24 adaptor available. No tools required for installation. Save 75% compared to incandescent sources.



LABELS AND LISTINGS

UL Listed

UL Listed for Wet Locations

ENERGY STAR Qualified

Meets TITLE 24 Requirements

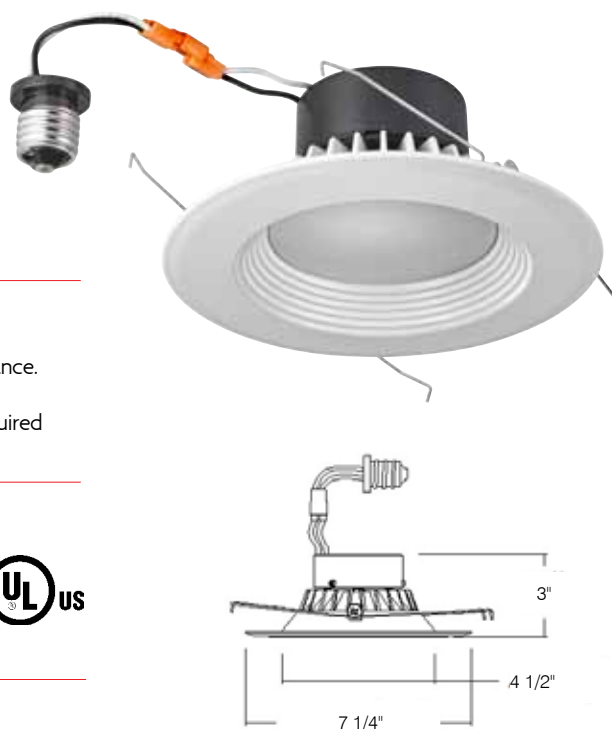

ORDERING INFORMATION

Code: 70973

Item # RTL/RF/643WH/WH/D



ARCHITECTURAL



4" Architectural CFL Recessed Downlight

ARVF/4/1X18/BH

PRODUCT SPECIFICATIONS

LAMP

One 18W Quad or Triple Tube compact fluorescent lamp
G(X)24q-2 lamp holder. 4 pin electronic

SOCKET CUP

Die-cast aluminum socket cup dissipates heat and
adjusts vertically for optimum light performance.

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET

Rough-in section equipped with vertically adjustable mounting brackets
(up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).



JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA
certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch
circuit conductors (4 in, 4 out)

Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly)
fully assembled for ease of installation.

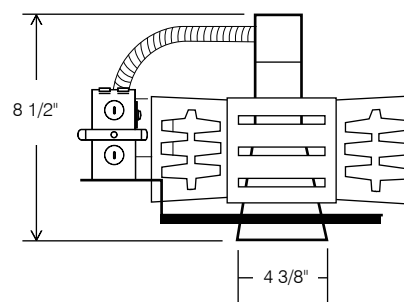

BALLAST DATA


ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input
voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79532
Item # ARVF/4/1X18/BH
*Topaz offers numerous lamp options.
Consult your sales rep.*

4" Architectural CFL Recessed Downlight

ARVF/4/1X26/BH

PRODUCT SPECIFICATIONS

LAMP

One 26W Quad or Triple Tube compact fluorescent lamp
G24(X)24q-3 lamp holder. 4 pin electronic

SOCKET CUP

Die-cast aluminum socket cup dissipates heat and
adjusts vertically for optimum light performance.

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET

Rough-in section equipped with vertically adjustable mounting brackets
(up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).



JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA
certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch
circuit conductors (4 in, 4 out).

Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly)
fully assembled for ease of installation.

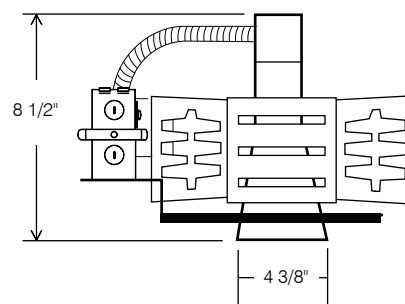

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input
voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements



ORDERING INFORMATION

Code: 79533
Item # ARVF/4/1X26/BH
Topaz offers numerous lamp options.
Consult your sales rep.

4" Architectural CFL Recessed Downlight

ARVF/4/1X2642/BH

PRODUCT SPECIFICATIONS

LAMP

One 26/32/42W Triple Tube compact fluorescent lamp
GX24q lamp holder. 4 pin electronic

SOCKET CUP

Die-cast aluminum socket cup dissipates heat and adjusts vertically for optimum light performance.

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET

Rough-in section equipped with vertically adjustable mounting brackets (up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).



JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)

Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly) fully assembled for ease of installation.

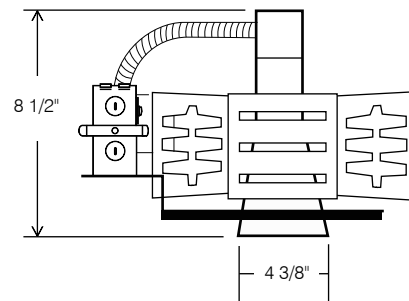

BALLAST DATA


ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P. 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements




ORDERING INFORMATION

Code: 79534
Item # ARVF/4/1X2642/BH
*Topaz offers numerous lamp options.
Consult your sales rep.*


4" Architectural CFL Recessed Trims



ATV400/C
Clear Specular Reflector
Code: 79526

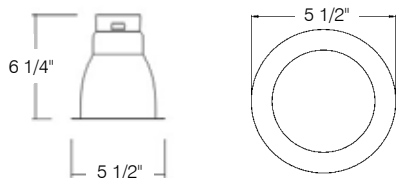

ATV401/W
Clear Specular Reflector with White Baffle
Code: 79527

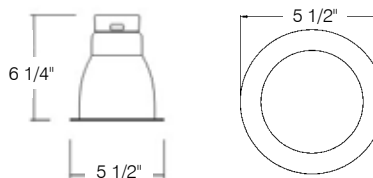

6" Architectural CFL Recessed Downlight

ARVF/6/1X2642/BH

PRODUCT SPECIFICATIONS

LAMP

One 26/32/42W Triple Tube compact fluorescent lamp
GX24q lamp holder. 4 pin electronic

SOCKET CUP

Die-cast aluminum socket cup dissipates heat and adjusts vertically for optimum light performance.

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET

Rough-in section equipped with vertically adjustable mounting brackets (up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).



JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)

Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly) fully assembled for ease of installation.

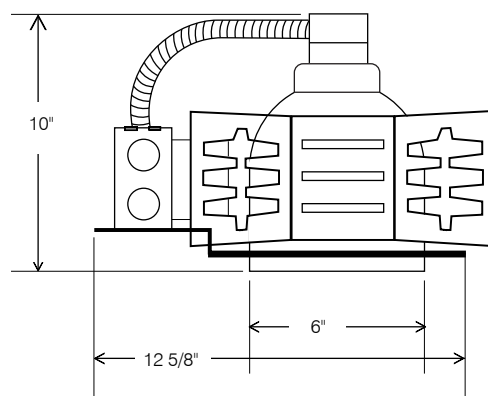

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P. 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements



ORDERING INFORMATION

Code: 79506
Item # ARVF/6/1X2642/BH
*Topaz offers numerous lamp options.
Consult your sales rep.*

6" Architectural CFL Recessed Downlight

ARVF/6/1X2642/FI

PRODUCT SPECIFICATIONS

LAMP

One 26W Quad or one 26/32/42W Triple Tube compact fluorescent lamp G(X)24q lamp holder. 4 pin electronic

SOCKET CUP


Die-formed aluminum socket cup dissipated heat and adjusts vertically for optimum light performance

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.

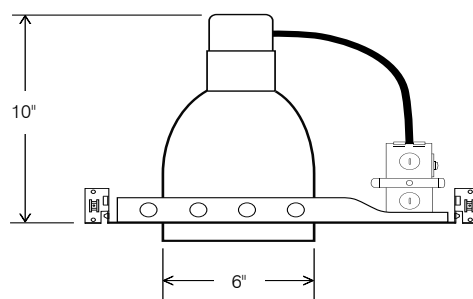


INSTALLATION

MOUNTING FRAME

Galvanized steel construction
Adjustable bar hangers that can be repositioned 90° on the mounting frame

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

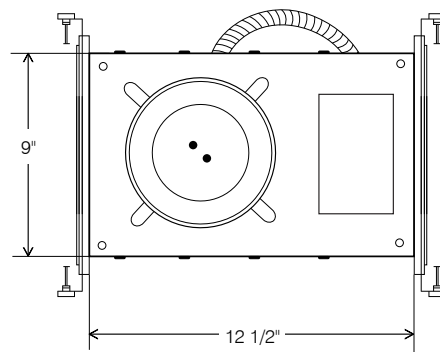

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P. 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79507


Item # ARVF/6/1X2642/FI

Topaz offers numerous lamp options.
Consult your sales rep.


6" Architectural CFL Recessed Trims




ATV600/C
Clear Specular Reflector
with White Ring
Code: 79517

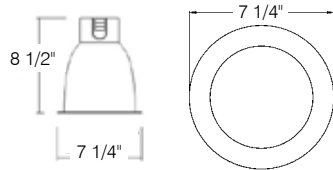


ATV614/C
Clear Specular Wall Wash
Code: 79528

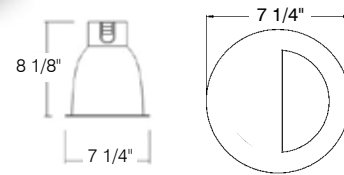


ATV601/W
Clear Specular Reflector
with White Baffle
Code: 79518

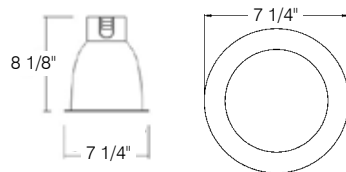

ATV614/W
White Wall Wash
Code: 79529

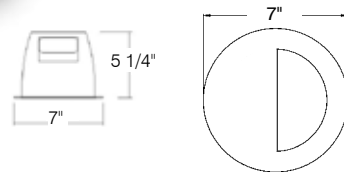

ATV604/C
Clear Specular Louver
Code: 79519

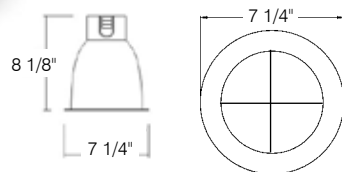

6" Architectural CFL Recessed Downlight

ARHF/6/1X2642/BH

PRODUCT SPECIFICATIONS

LAMP

One 26W Quad or one 26/32/42W Triple Tube compact fluorescent lamp G(X)24q lamp holder. 4 pin electronic

SOCKET CUP

Heavy gauge die-formed steel housing

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET



Rough-in section equipped with vertically adjustable mounting brackets (up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly)
fully assembled for ease of installation.

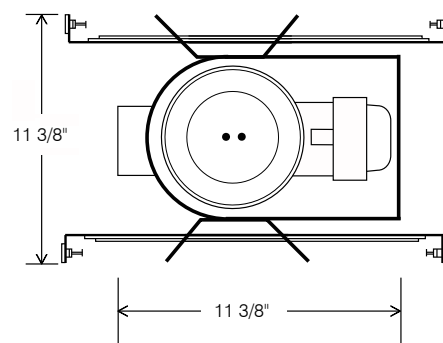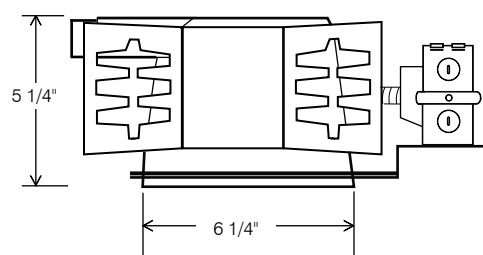

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P.
26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements



ORDERING INFORMATION

Code: 79501

Item # ARHF/6/1X2642/BH

Topaz offers numerous lamp options.
Consult your sales rep.

6" Architectural CFL Recessed Downlight

ARHF/6/2X26/BH

PRODUCT SPECIFICATIONS

LAMP

Two 26W Quad compact fluorescent lamp
G24q-3 lamp holder. 4 pin electronic

SOCKET CUP

Heavy gauge die-formed steel housing

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET



Rough-in section equipped with vertically adjustable mounting brackets (up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly) fully assembled for ease of installation.

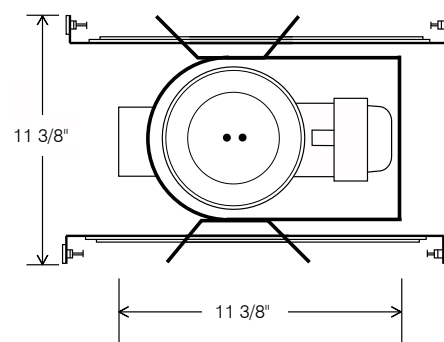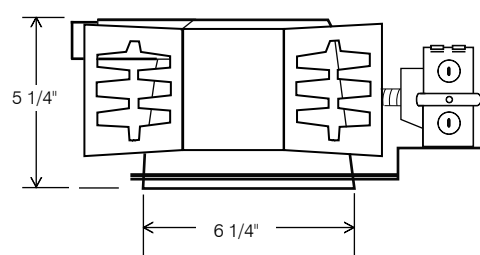

BALLAST DATA


ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection. Class P. 26 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITLE 24 Requirements




ORDERING INFORMATION

Code: 79502
Item # ARHF/6/2X26/BH
*Topaz offers numerous lamp options.
Consult your sales rep.*


6" Architectural CFL Recessed Trims




ATH600/C
Clear Specular Reflector with White Ring
Code: 79501

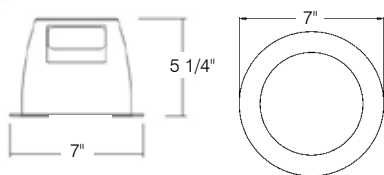


ATH614/W
White Wall Wash
Code: 79523

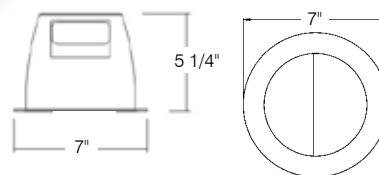


ATH601/W
White Baffle with Reflector
Code: 79511

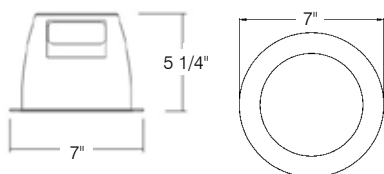


ATH621/C
White Baffle with Albalite Lens
Code: 79513

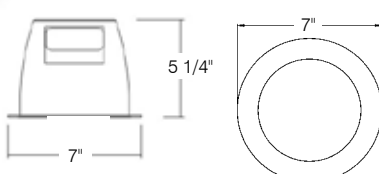

ATH604/C
Clear Specular Louver
Code: 79512

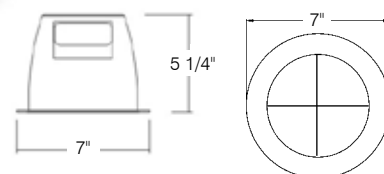

ATH614/C
Clear Specular Wall Wash
Code: 79522

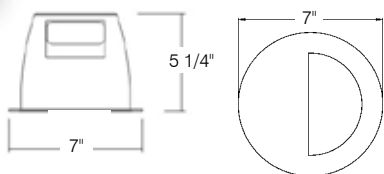

8" Architectural CFL Recessed Downlight

ARVF/8/1X2642/BH

PRODUCT SPECIFICATIONS

LAMP

Two 26/32/42W Triple Tube compact fluorescent lamp
GX4q lamp holder. 4 pin electronic

SOCKET CUP

Die-formed aluminum socket cup dissipates heat and adjusts vertically for optimum light performance

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.



INSTALLATION

MOUNTING BRACKET



Rough-in section equipped with vertically adjustable mounting brackets (up to 3") that accept 1/2" conduit, "C" channels or linear flat bars (by others).

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

MOUNTING FRAME

Painted or Galvanized steel ring with clips for mounting of trims
Rough-in section (junction box, mounting frame and socket assembly)
fully assembled for ease of installation.

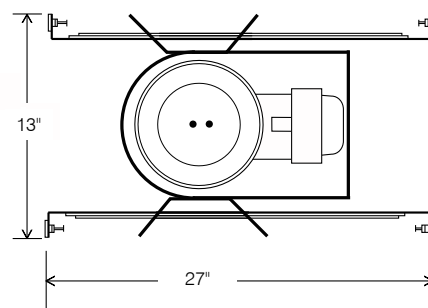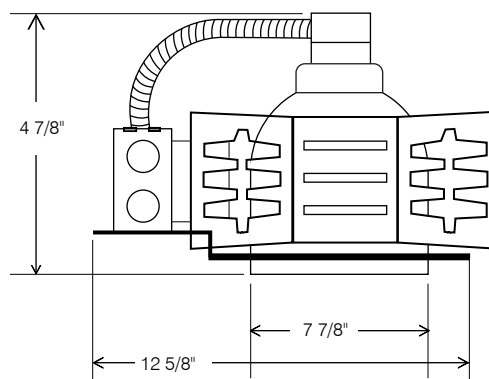

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection.
Class P, 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79508
Item # ARVF/8/1X2642/BH
Topaz offers numerous lamp options.
Consult your sales rep.

8" Architectural CFL Recessed Downlight

ARVF/8/1X2642/FI

PRODUCT SPECIFICATIONS

LAMP

One 26W Quad or one 26/32/42W Triple Tube compact fluorescent lamp G(X)24q lamp holder. 4 pin electronic

SOCKET CUP



Die-formed aluminum socket cup dissipates heat and adjusts vertically for optimum light performance

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.

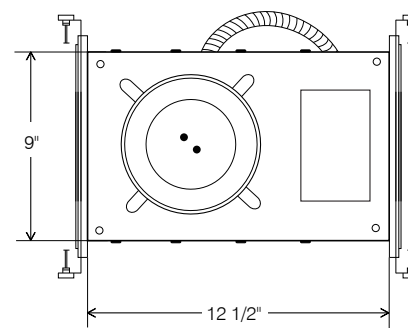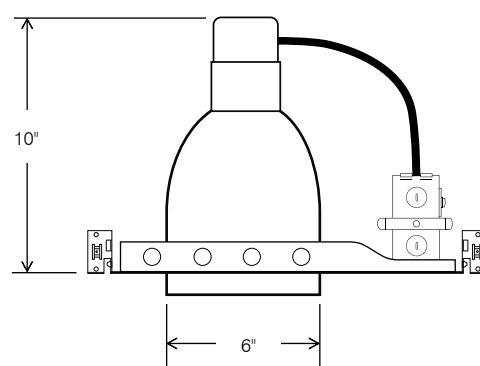

INSTALLATION

MOUNTING FRAME

Galvanized steel construction
Pre-installed nails
Adjustable Bar Hangers that can be repositioned 90° on mounting frame

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection.
Class P, 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements




ORDERING INFORMATION

Code: 79509
Item # ARVF/8/1X2642/FI
*Topaz offers numerous lamp options.
Consult your sales rep.*


8" Architectural CFL Recessed Trims




ATV800/C
Clear Specular Reflector
with White Ring
Code: 79520

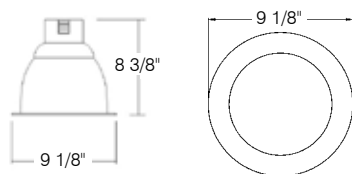


ATV814/C
Clear Specular Wall Wash
Code: 79530

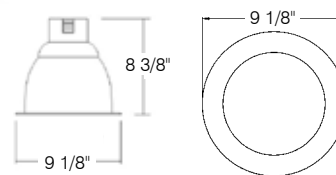

ATV814/W
White Wall Wash
Code: 79531

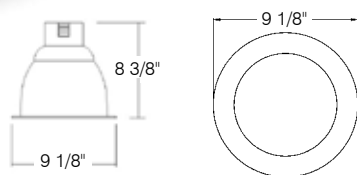

ATV860/W
White Flush Lens
Code: 79521

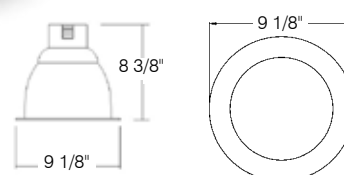

8" Architectural CFL Recessed Downlight

ARHF/8/1X2642/FI

PRODUCT SPECIFICATIONS

LAMP

One 26W Quad or one 26/32/42W Triple Tube compact fluorescent lamp G(X)24q lamp holder. 4 pin electronic

SOCKET HOUSING

Heavy gauge die-formed steel housing

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.




INSTALLATION

MOUNTING FRAME

Galvanized steel construction
Pre-installed nails
Adjustable Bar Hangers that can be repositioned 90° on mounting frame

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

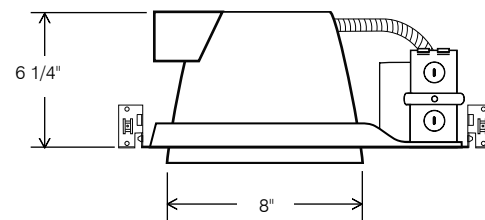


BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection.
Class P, 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

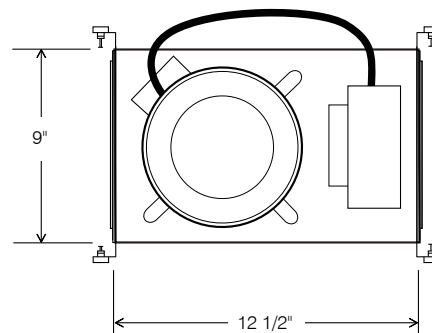

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements



ORDERING INFORMATION

Code: 79503
Item # ARHF/8/1X2642/FI
*Topaz offers numerous lamp options.
Consult your sales rep.*

8" Architectural CFL Recessed Downlight

ARHF/8/2X26/FI

PRODUCT SPECIFICATIONS

LAMP

Two 26W Quad or Triple Tube compact fluorescent lamp
G(X)24q-3 lamp holders. 4 pin electronic

SOCKET HOUSING

Heavy gauge die-formed steel housing

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.





INSTALLATION

MOUNTING FRAME

Galvanized steel construction
Pre-installed nails
Adjustable Bar Hangers that can be repositioned 90° on mounting frame

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

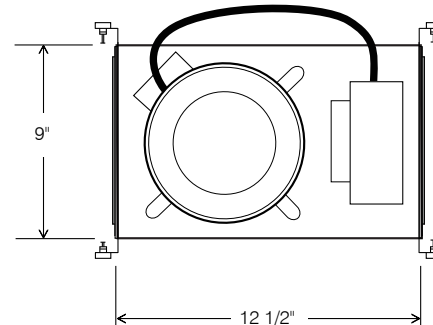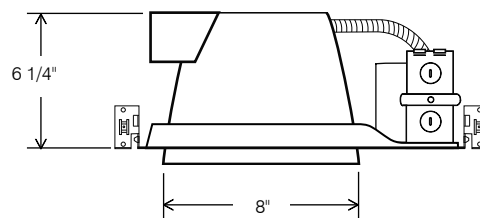

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection.
Class P, 26 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITL 24 Requirements



ORDERING INFORMATION

Code: 79504
Item # ARHF/8/2X26/FI
*Topaz offers numerous lamp options.
Consult your sales rep.*

8" Architectural CFL Recessed Downlight

ARHF/8/2X2642/FI

PRODUCT SPECIFICATIONS

LAMP

Two 26W Quad or two (26/32/42W Triple Tube compact fluorescent lamp G(X)24q lamp holders. 4 pin electronic

SOCKET HOUSING

Heavy gauge die-formed steel housing

BALLAST

120V thru 277V HPF Electronic with end-of-life lamp protection
UL listed/CSA certified

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.





INSTALLATION

MOUNTING FRAME

Galvanized steel construction
Pre-installed nails
Adjustable Bar Hangers that can be repositioned 90° on mounting frame

JUNCTION BOX

Pre-wired junction box provided with 7/8" knockouts, UL listed/CSA certified for through branch wiring, maximum 8 No. 12 AWG 90°C branch circuit conductors (4 in, 4 out)
Junction box provided with removable access plates
4 knockouts equipped with pryout slots and strain reliefs.

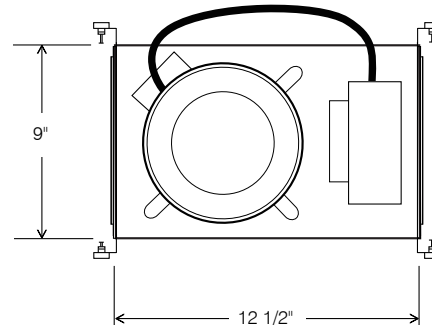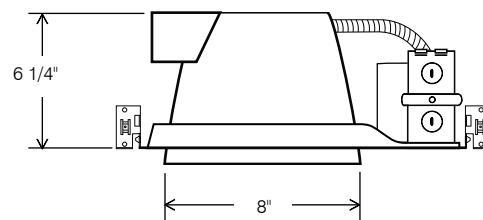

BALLAST DATA

ADVANCE PROGRAMMED START ELECTRONIC BALLAST

Thermally protected, electronic, high power factor, universal input voltage ranging from 120V - 277V, 50-60Hz with end of life protection.
Class P, 26-42 Watts maximum.

Starting Temperature:	0°F (-18°C)
Operating Ambient Temperature:	167°F (75°C) Max.
Ballast Factor:	1.02
Power Factor:	>0.98
THD:	<10%

LABELS AND LISTINGS

UL Listed for damp location
UL Listed for feed through wiring
ENERGY STAR Qualified
Meets TITLE 24 Requirements



ORDERING INFORMATION


Code: 79505
Item # ARHF/8/2X2642/FI
Topaz offers numerous lamp options.
Consult your sales rep.

8" Architectural CFL Recessed Trims




ATH800/C

Clear Specular Reflector with White Ring
Code: 79514

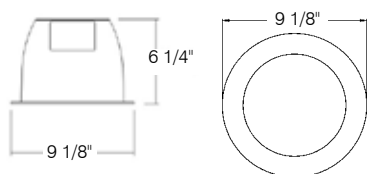


ATH804/C

Clear Specular Louver
Code: 79515

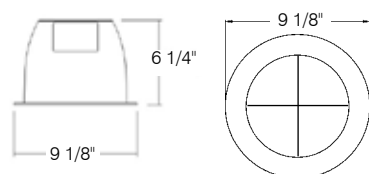


ATH814/C

Clear Specular Wall Wash
Code: 79524

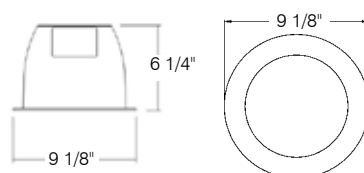


ATH814/W

White Wall Wash
Code: 79525

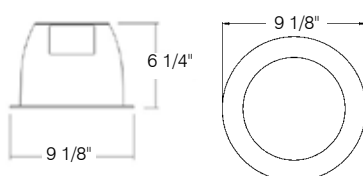

ATH860/W

White Flush Lens
Code: 79516

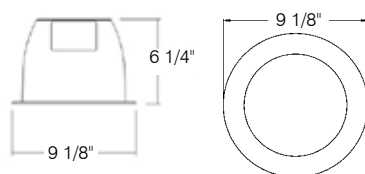





COMPACT FLUORESCENT



4" Compact Fluorescent Recessed Can

New Construction 1 X 26 Watt Vertical Mount with 120V Electronic Ballast IC Airtight

RH4/NC/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING


Single Wall Aluminum or CRS with white powder coat finish.

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box and the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120 volt electronic ballast provides full light output and rated lamp life.

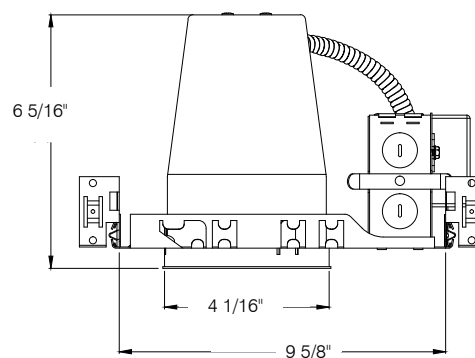


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.



LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79140

Item # RH4/NC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

4" Compact Fluorescent Recessed Can

New Construction 1 X 26 Watt Vertical Mount with 120-277V Electronic Ballast IC Airtight

RH4/NC/126/IC/AT/H

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box and the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277 volt electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

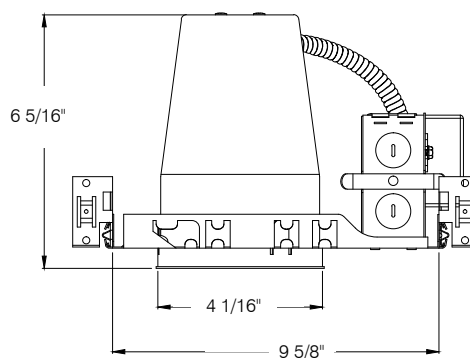

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79143

Item # RH4/NC/126/IC/AT/H

Topaz offers numerous lamp options.

Consult your sales rep.

4" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W Vertical Mount with 120V Electronic Ballast IC Airtight

RH4/RC/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum or CRS with white powder coat finish.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

ELECTRONIC BALLAST


Thermally protected, fused, 120 volt electronic ballast provides full light output and rated lamp life.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

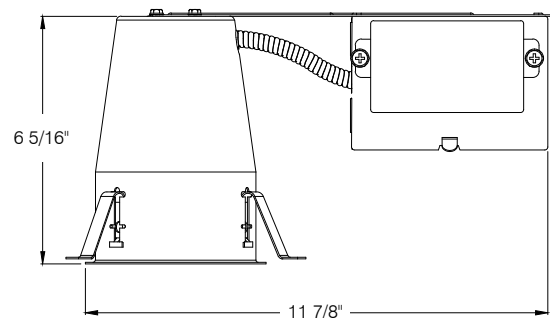

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

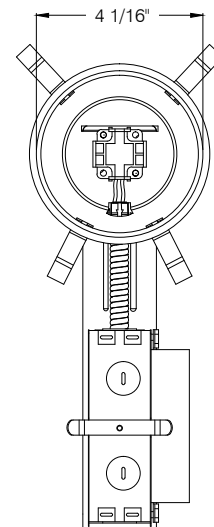

ORDERING INFORMATION

Code: 79141

Item # RH4/RC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

4" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W Vertical Mount with 120/277V Electronic Ballast IC Airtight

RH4/RC/126/IC/AT/H

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum or CRS with white powder coat finish.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

ELECTRONIC BALLAST


Thermally protected, fused, 120/277 volt electronic ballast provides full light output and rated lamp life.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

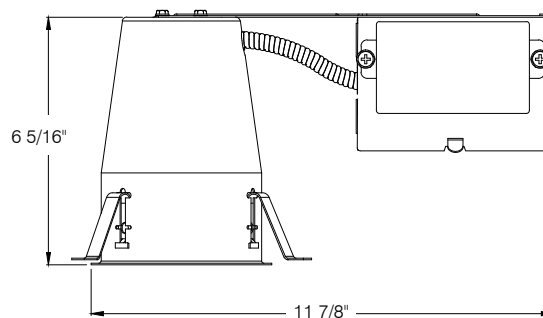

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets Title 24 Requirements

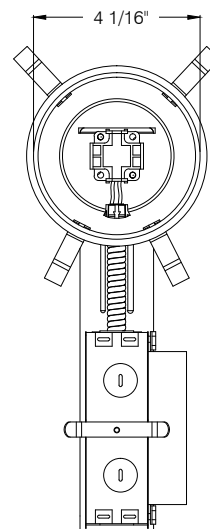

ORDERING INFORMATION

Code: 79142

Item # RH4/RC/126/IC/AT/H

Topaz offers numerous lamp options.


Consult your sales rep.

4" Compact Fluorescent Recessed Trims




RT410CL/WH/C

White Trim with Clear Deep Reflector
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79172

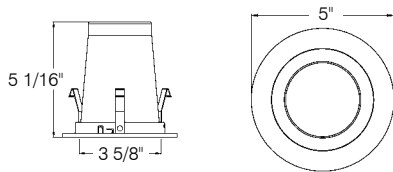


RT419WH/A/C

White Shower Trim with Albalite Lens and
Clear Deep Reflector
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79173

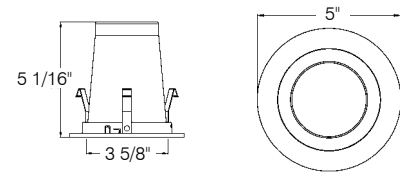


RT411CL/WH/C

Clear Deep Reflector with White Baffle
and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79174

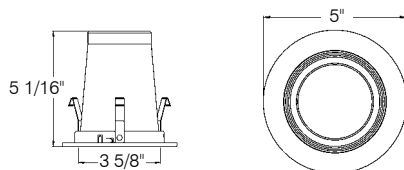


RT419WH/FL/C

Fresnel Shower Trim with Deep Clear
Reflector and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79176

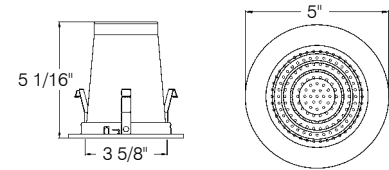


RT412WH/C

White Deep Stepped Baffle with
White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79171

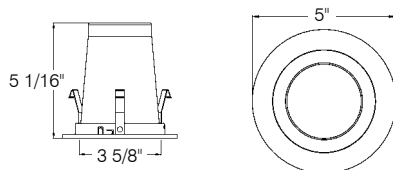

RT419WH/FR/C

White Shower Trim with Frosted Lens, White
Ring and Clear Deep Reflector
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79175

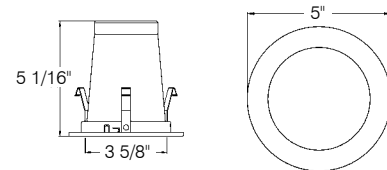

5" Compact Fluorescent Recessed Can

New Construction 1 X 18W Vertical Mount with 120V Electronic Ballast IC Airtight

RH5/NC/118/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120 volt electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

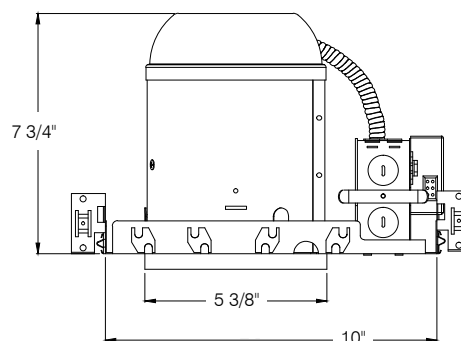

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79144

Item # RH5/NC/118/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

5" Compact Fluorescent Recessed Can

New Construction 1 X 26W Vertical Mount with 120V Electronic Ballast IC Airtight

RH5/NC/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

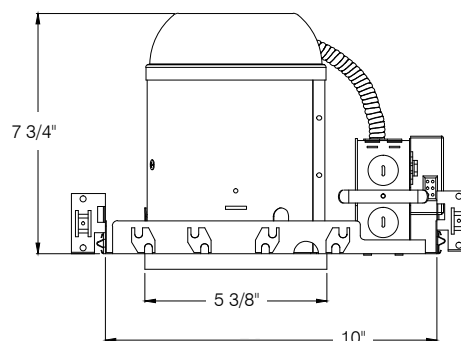

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79146

Item # RH5/NC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

5" Compact Fluorescent Recessed Can

New Construction 1 X 26W Vertical Mount with 120/277V Electronic Ballast IC Airtight

RH5/NC/126/IC/AT/H

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

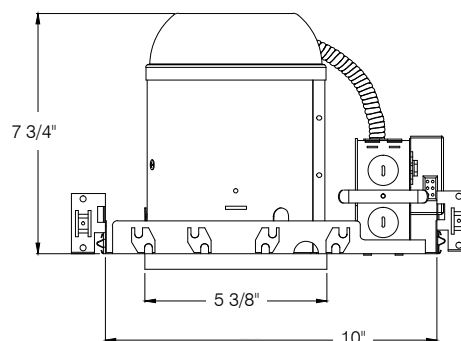

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79145

Item # RH5/NC/126/IC/AT/H

Topaz offers numerous lamp options.

Consult your sales rep.

5" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W 120-277V Vertical Mount with Electronic Ballast IC Airtight

RH5/RC/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

ELECTRONIC BALLAST


Thermally protected, fused, 120 volt electronic ballast provides full light output and rated lamp life.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

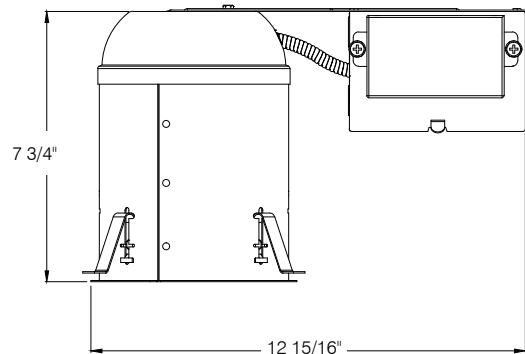

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

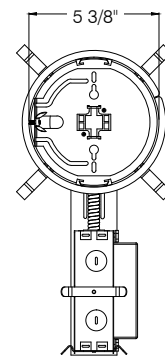

ORDERING INFORMATION

Code: 79147

Item # RH5/RC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

5" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W 120-277V Vertical Mount with Electronic Ballast IC Airtight

RH5/RC/126/IC/AT/H

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277 volt electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

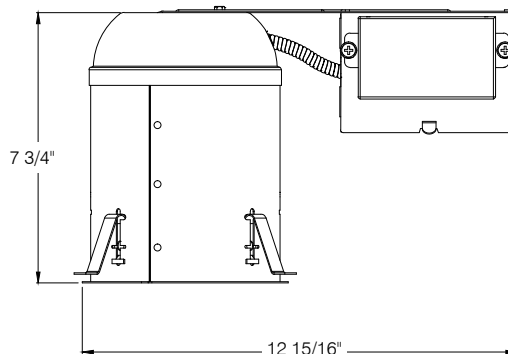

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

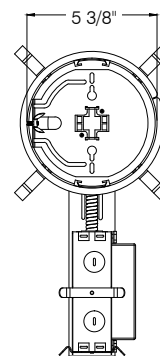

ORDERING INFORMATION

Code: 79148

Item # RH5/RC/126/IC/AT/H

Topaz offers numerous lamp options.


Consult your sales rep.

5" Compact Fluorescent Recessed Trims




RT510CL/WH

Clear Reflector with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77618

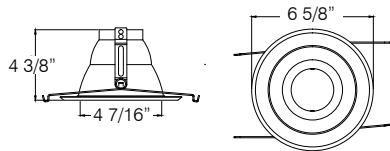


RT519WH/A

Albalite Shower Trim with Deep Clear Reflector and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79166

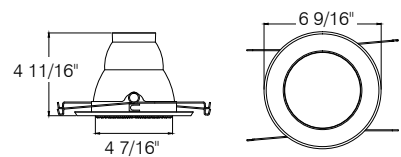


RT511CL/WH

Deep Clear Reflector with White Baffle and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79168




RT519WH/FL

Fresnel Shower Trim with Deep Clear Reflector and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79165




RT512WH/C

Deep White Baffle with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 78271

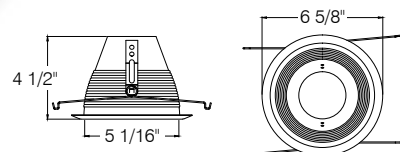

RT519WH/FR

Frosted Lens Shower Trim with Deep Clear Reflector and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79167



6" Compact Fluorescent Recessed Can

New Construction 1 X 18W Vertical Mount with 120V Electronic Ballast IC Airtight

RH6/NC/118/IC/AT

PRODUCT SPECIFICATIONS

LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

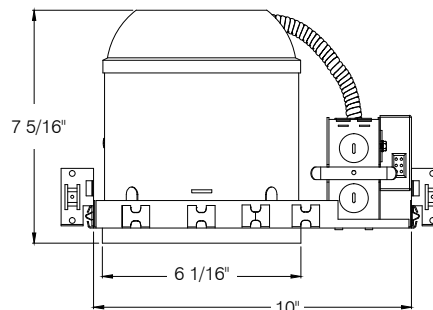

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79151

Item # RH6/NC/118/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction 1 X 26 Watt Vertical Mount with 120V Electronic Ballast IC Airtight

RH6/NC/126/IC/AT

PRODUCT SPECIFICATIONS

LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

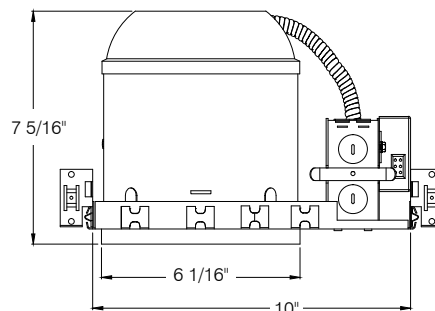

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79149

Item # RH6/NC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction 1 X 26 Watt Vertical Mount with 120/277V Electronic Ballast IC Airtight

RH6/NC/126/IC/AT/H

PRODUCT SPECIFICATIONS

LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

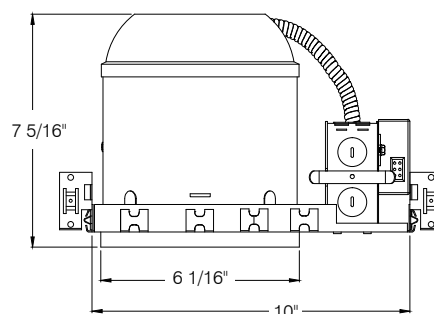

LABELS AND LISTINGS



UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79150

Item # RH6/NC/126/IC/AT/H

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction 1 X 26W Vertical Mount with Floating Socket IC Airtight

RH6/NC/126/IC/AT/FL

PRODUCT SPECIFICATIONS

LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains one 1-1/8" and six 7/8" knockouts and four Romex pryouts with strain relief.

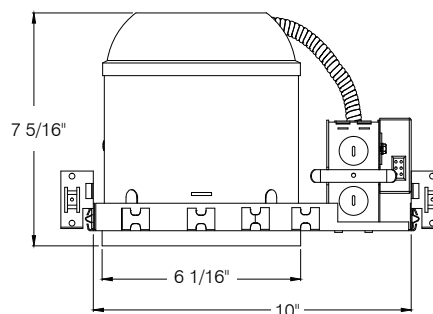

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 77566

Item # RH6/NC/126/IC/AT/FL

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction 1 X 26, 32 or 42W 120/277V Vertical Mount with Electronic Ballast IC Airtight

RH6/NC/12642/IC/AT/H

PRODUCT SPECIFICATIONS

LAMP

One 26, 32 or 42W Double Twin Tube (Quad) or Triple Tube
4 pin compact fluorescent lamp, G24Q, GX24Q base.

HOUSING

Single Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277 electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit box. Contains one 1-1/8" and six 7/8" knockouts and four Romex pryouts with strain relief.

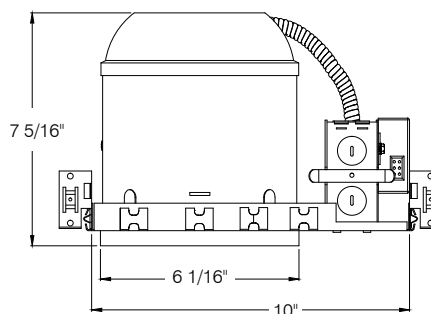

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 78980

Item # RH6/NC/12642/IC/AT/H

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction 1 X 26, 32 or 42W 120/277V Vertical Mount with Electronic Ballast IC Airtight

RH6/NC/12642/IC/ATHD

PRODUCT SPECIFICATIONS

LAMP

One 26, 32 or 42W Double Twin Tube (Quad) or Triple Tube
4 pin compact fluorescent lamp, G24Q, GX24Q base.

HOUSING

Double Wall Aluminum

PLASTER FRAME

Galvanized steel construction. The housing can be removed
from plaster frame to provide access to the junction box and ballast.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277V electronic
ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered
lumber. Bar hangers are adjustable from 13-5/8" to 25"
and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains one 1-1/8" and six 7/8"
knockouts and four Romex pryouts with strain relief.

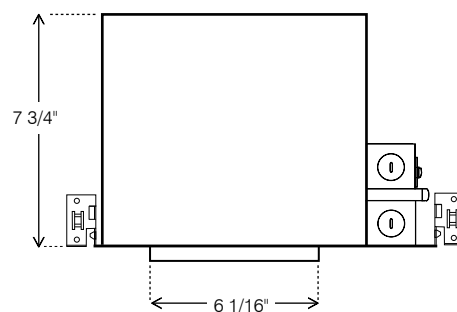

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

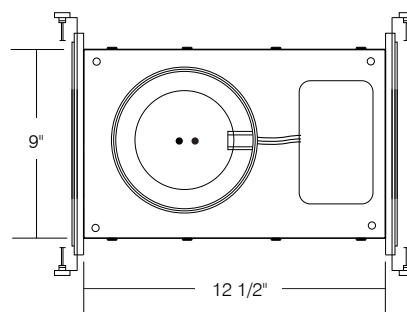

ORDERING INFORMATION

Code: 79153

Item # RH6/NC/12642/IC/ATHD

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

New Construction Horizontal Mount 2 X 26W 120/277V Electronic Ballast

RH6H/NC/226

PRODUCT SPECIFICATIONS

LAMP

Socket for two Double Twin Tube (Quad) 4 pin lamp G24Q, GX24Q base.

ELECTRONIC BALLAST

Thermally protected, fused, 120/277V electronic ballast provides full light output and rated lamp life.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit box. Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief.

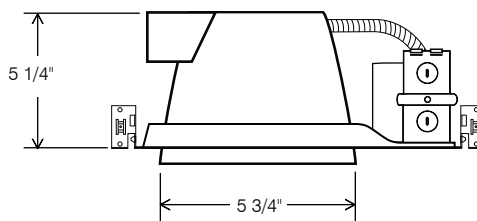

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

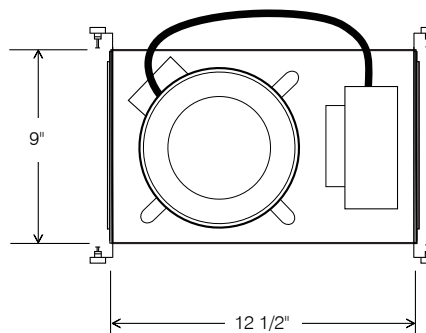

TRIMS

For a complete listing of 6" Horizontal trims please see page 27.

ORDERING INFORMATION

Code: 79429

Item # RH6H/NC/226

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W Vertical Mount with Electronic Ballast IC Airtight

RH6/RC/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q,GX24Q base.

HOUSING

Single Wall Aluminum

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

ELECTRONIC BALLAST


Thermally protected, fused, 120V electronic ballast provides full light output and rated lamp life.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains one 1-1/8" and six 7/8" knockouts and four Romex pryouts with strain relief.

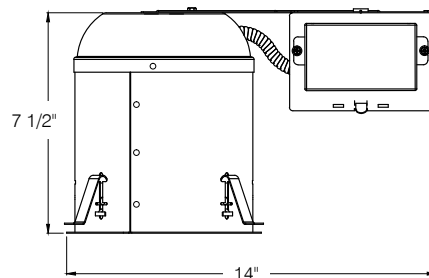

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79152

Item # RH6/RC/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Compact Fluorescent Recessed Can

Remodel Construction 1 X 26W 120/277V Vertical Mount with Electronic Ballast IC Airtight

RH6/RC/126/IC/AT/H

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one Double Twin Tube (Quad) or Triple Tube 4 pin lamp, G24Q,GX24Q base.

HOUSING

Single Wall Aluminum

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

ELECTRONIC BALLAST


Thermally protected, fused, 120/277V electronic ballast provides full light output and rated lamp life.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains one 1-1/8" and six 7/8" knockouts and four Romex pryouts with strain relief.

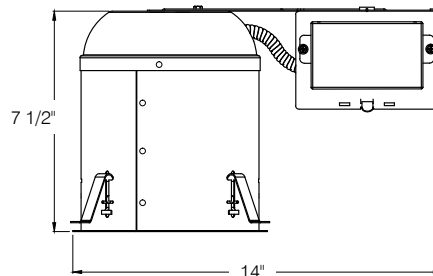

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 77504

Item # RH6/RC/126/IC/AT/H

Topaz offers numerous lamp options.


Consult your sales rep.

6" Compact Fluorescent Recessed Trims




RT600CL/WH

Clear Reflector with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79161

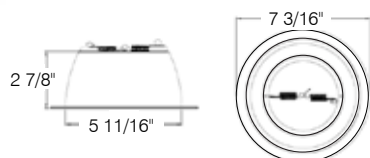


RT601WH

White Step Baffle with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79135



RT600WH

White Reflector with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79162

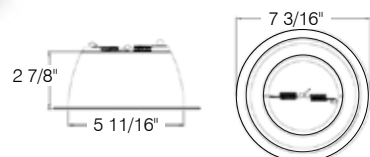

RT601SCH

All Satin Chrome Step Baffle
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 70960





RT601BL

Black Step Baffle with Black Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79604




RT602GW/AT

One-Piece Socket Supporting Gloss White Step Baffle with Gloss White Ring, Airtight
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77565

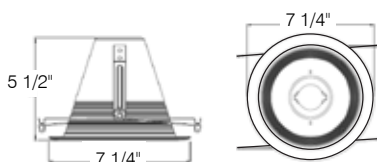


RT601BL/WH

Black Step Baffle with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77102



RT602GW/AT/FS

One-Piece Socket Supporting Gloss White Step Baffle with Gloss White Ring "Rabbit Ears" Friction Springs, Airtight
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77564




6" Compact Fluorescent Recessed Trims




RT602WH/AT

One-Piece Socket Supporting White Step Baffle with White Ring, Airtight
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77598

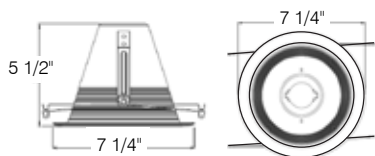


RT609WH/FL/P

Fresnel Glass Lens with White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79160




RT609WH/A

Albalite Lens Shower Trim with White Metal Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79136





RT609WH/FR/P

Frosted Glass Lens with White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79155




RT609WH/A/P

Albalite Lens Shower Trim with White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79137




RT609WH/FL

Fresnel Glass Lens with White Metal Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77559




RT609WH/DO/P

Drop Opal Lens with White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 75971



RT610CL/WH

Clear Deep Reflector with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79156




6" Compact Fluorescent Recessed Trims




RT611BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 70014





RT614GW

Gloss White Deep Smooth Cone
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79850

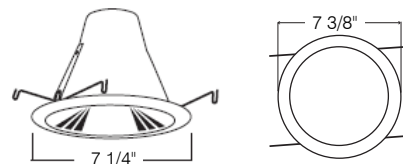


RT611WH

Clear Deep Reflector with White Step Baffle and White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79158




RT615C/AT

Airtight Clear Deep Smooth Cone
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79853

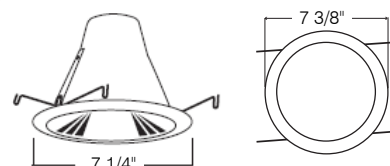



RT612WH

White Step Baffle with White Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79159

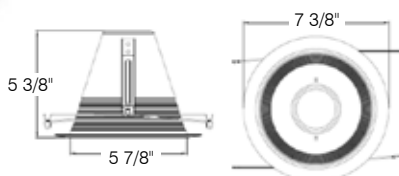


RT615GW/AT

Airtight Gloss White Deep Smooth Cone
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79852

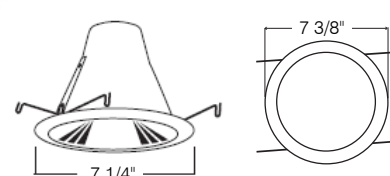


RT614C

Clear Deep Smooth Cone
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 79851

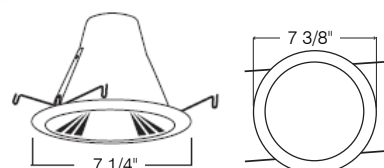

RT619WH/A/P

Albalite Shower Trim with Clear Deep Reflector and White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77572




6" Compact Fluorescent Recessed Trims



RT620WH


White Wall Wash
Uses 18W-26W Quad/Triple
Tube Lamps

Order Code: 78077



RT621WH

White Baffle with White Wall Wash
Uses 18W-26W Quad/Triple Tube Lamps
Order Code: 77600





GU24



4" GU24 Recessed Can

New Construction 11-18W GU24 IC Airtight

RH4/NG/118/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one 11-18W GU24 120V

HOUSING

Single Wall Aluminum or CRS with white powder coat finish.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or, engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

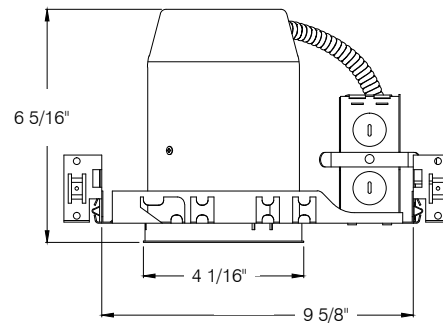

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 requirements



ORDERING INFORMATION

Code: 79424

Item # RH4/NG/118/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

4" GU24 Recessed Can

Remodel Construction 11-18W GU24 IC Airtight

RH4/RG/118/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP


Socket for one 18W GU24 120V

HOUSING

Single Wall Aluminum or CRS with white powder coat finish.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

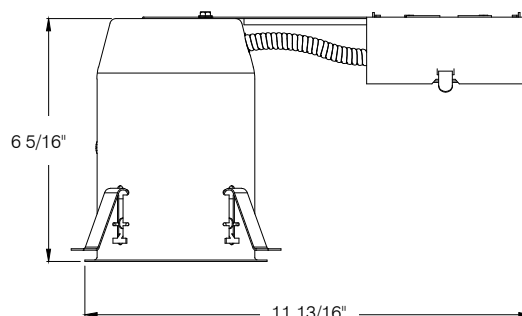

INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS


UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITL 24 Requirements

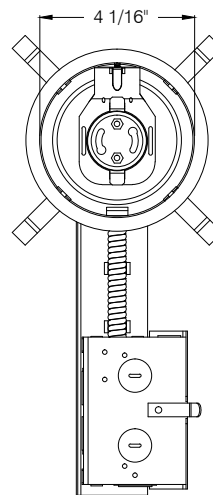

ORDERING INFORMATION

Code: 79146

Item # RH4/RG/118/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.


4" GU24 Recessed Trims



RT410CL/WH/G

White GU24 Trim with Clear Deep Reflector
For use with 11-18W GU24 lamps


Order Code: 79448

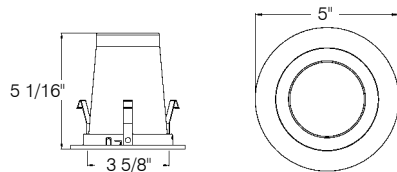

RT412WH/G

White Deep GU24 Stepped Baffle with White Ring
For use with 11-18W GU24 lamps

Order Code: 79447

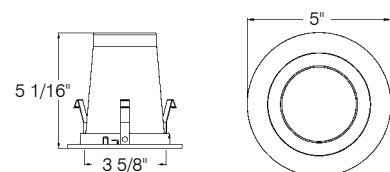

5" GU24 Recessed Can

New Construction 11-27W GU24 Vertical Mount IC Airtight

RH5/NG/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one 11-27W GU24 120V

HOUSING

Single wall aluminum housing




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

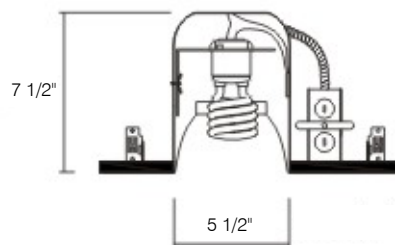


LABELS AND LISTINGS

UL Listed for Damp Location

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79978

Item # RH5/NG/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

5" GU24 Recessed Can

Remodel 11-27W GU24 Vertical Mount IC Airtight

RH5/RG/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one 11-27W GU24 120V

HOUSING

Single wall aluminum housing

REMODEL CLIPS


Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

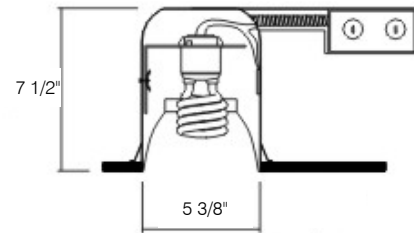


LABELS AND LISTINGS

UL Listed for Damp Location

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79979

Item # RH5/RG/126/IC/AT

Topaz offers numerous lamp options.


Consult your sales rep.

5" GU24 Recessed Trims




RT510CL/WH

Clear Reflector with White Ring
Uses 11W-27W GU24 Lamps
Order Code: 77618

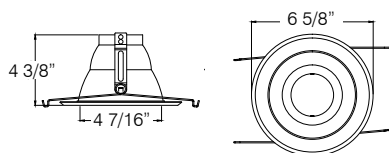


RT519WH/A

Albalite Shower Trim with Deep Clear
Reflector and White Ring
Uses 11W-27W GU24 Lamps
Order Code: 79166

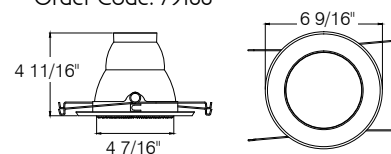


RT511CL/WH

Deep Clear Reflector with
White Baffle and White Ring
Uses 11W-27W GU24 Lamps
Order Code: 79168

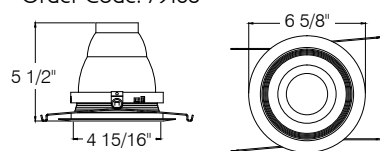


RT519WH/FL

Fresnel Shower Trim with Deep Clear
Reflector and White Ring
Uses 11W-27W GU24 Lamps
Order Code: 79165




RT512WH/C

Deep White Baffle and White Ring
Uses 11W-27W GU24 Lamps
Order Code: 78271

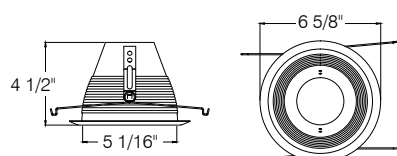

RT519WH/FR

Frosted Lens Shower Trim with Deep
Clear Reflector and White Ring
Uses 11W-27W GU24 Lamps
Order Code: 79167

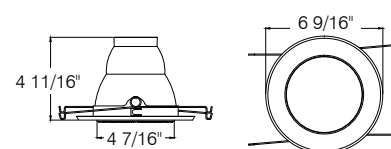

6" GU24 Recessed Can

New Construction 11-27W GU24 Vertical Mount IC Airtight

RH6/NG/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one 11-27W GU24 120V

HOUSING

Single wall aluminum housing




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

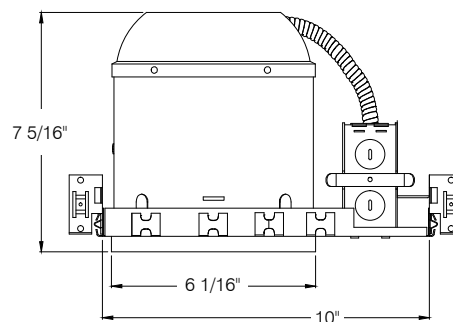

LABELS AND LISTINGS


UL Listed for Damp Location

Certified for Airtight construction

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements



ORDERING INFORMATION

Code: 79425

Item # RH6/NG/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" GU24 Recessed Can

Remodel 11-27W GU24 Vertical Mount IC Airtight

RH6/RG/126/IC/AT

PRODUCT SPECIFICATIONS

SOCKET & LAMP

Socket for one 11-27W GU24 120V

HOUSING

Single wall aluminum housing

REMODEL CLIPS


Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

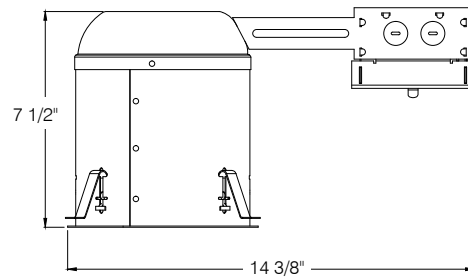

LABELS AND LISTINGS


UL Listed for Damp Location

Certified for Airtight construction

Certified under ASTM-E283 for Airtight construction

ENERGY STAR Qualified

Meets TITLE 24 Requirements

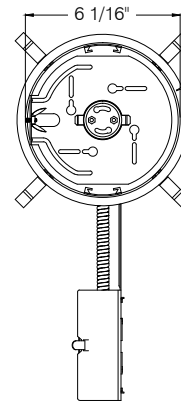

ORDERING INFORMATION

Code: 79417

Item # RH6/RG/126/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.


6" GU24 Recessed Trims



RT600CL/WH

Clear Reflector with White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79161

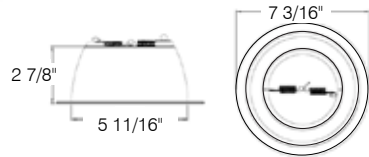

RT601SCH

All Satin Chrome Step Baffle
Uses 11W-27W GU24 Lamps


Order Code: 70960



RT600WH

White Reflector with White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79162

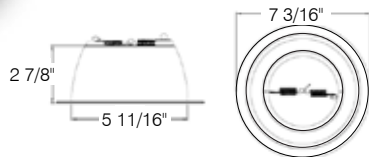

RT609WH/A

Albalite Lens Shower Trim with
White Metal Ring
Uses 11W-27W GU24 Lamps


Order Code: 79136



RT601BL

Black Step Baffle with Black Ring
Uses 11W-27W GU24 Lamps


Order Code: 79604



RT609WH/A/P

Albalite Lens Shower Trim with
White Plastic Ring
Uses 11W-27W GU24 Lamps


Order Code: 79137



RT601BL/WH

Black Step Baffle with White Ring
Uses 11W-27W GU24 Lamps

Order Code: 77102



RT609WH/DO/P

Drop Opal Lens with White Plastic Ring
Uses 11W-27W GU24 Lamps

Order Code: 75971



RT601WH

White Step Baffle with White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79135




RT609WH/FR/P

Frosted Glass Lens with White Plastic Ring
Uses 11W-27W GU24 Lamps

Order Code: 79155




6" GU24 Recessed Trims



RT609WH/FL

Fresnel Glass Lens with White Metal Ring
Uses 11W-27W GU24 Lamps


Order Code: 77559



RT609WH/FL/P

Fresnel Glass Lens with White Plastic Ring
Uses 18W-26W Quad/Triple Tube Lamps


Order Code: 79160



RT610CL/WH

Clear Deep Reflector with White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79156



RT611BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring
Uses 11W-27W GU24 Lamps


Order Code: 70014



RT611WH

Clear Deep Reflector with White Step Baffle and White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79158



RT612WH

White Step Baffle with White Ring
Uses 11W-27W GU24 Lamps


Order Code: 79159

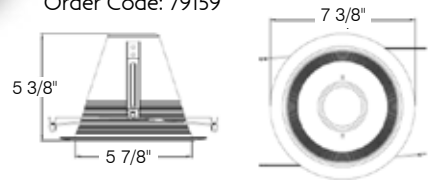

RT614C

Clear Deep Smooth Cone
Uses 11W-27W GU24 Lamps


Order Code: 79851

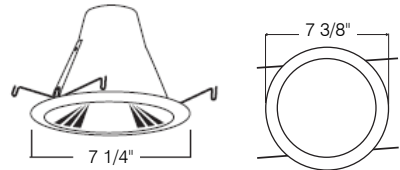

RT614GW

Gloss White Deep Smooth Cone
Uses 11W-27W GU24 Lamps


Order Code: 79850

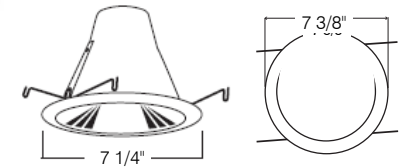

RT619WH/A/P

Albalite Shower Trim with Clear Deep Reflector and White Plastic Ring
Uses 11W-27W GU24 Lamps


Order Code: 77572



RT620WH

White Wall Wash
Uses 11W-27W GU24 Lamps


Order Code: 78077



RT621WH

White Baffle with White Wall Wash
Uses 11W-27W GU24 Lamps

Order Code: 77600





LINE VOLTAGE



4" Line Voltage Recessed Can

New Construction Non-IC

RH4/N

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max PAR/R20

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX


Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

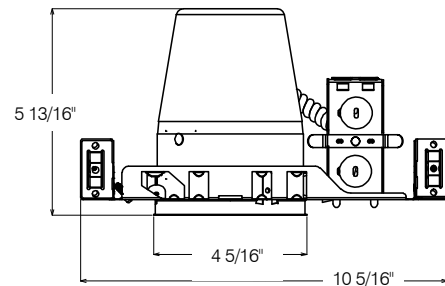

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

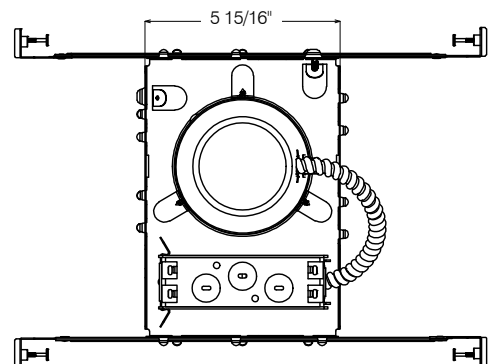

ORDERING INFORMATION

Code: 78080

Item # RH4/N

Topaz offers numerous lamp options.

Consult your sales rep.

4" Line Voltage Recessed Can

New Construction IC Airtight

RH4/N/IC/AT

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max PAR/R20

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

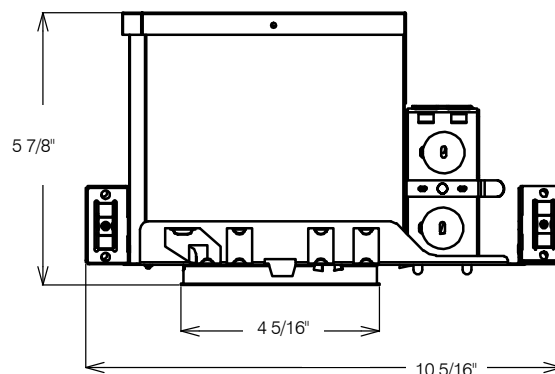

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction




ORDERING INFORMATION

Code: 79437

Item # RH4/N/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.



4" Line Voltage Recessed Can

Remodel Construction Non-IC Airtight

RH4/R/AT

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max PAR/R20

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

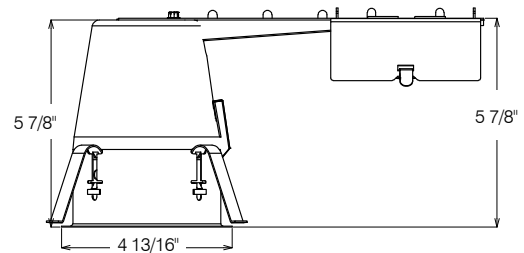

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction




ORDERING INFORMATION

Code: 78280

Item # RH4/R/AT

Topaz offers numerous lamp options.

Consult your sales rep.

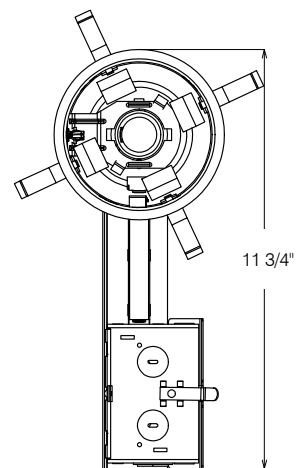


4" Line Voltage Recessed Trims




RT400BL/WH

Black Reflector with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 78093





RT401BL

Black Baffle with Black Ring
Uses 50W R20, PAR20 Lamps
Order Code: 79170




RT400CL/WH

Clear Reflector with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 77671




RT401BL/WH

Black Baffle with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 70052




RT400GO/WH

Gold Reflector with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 78092




RT401WH

White Baffle with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 79129




RT400WH

White Reflector with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 79555



RT403BL

Black Eyeball
Uses 50W R20, PAR20 Lamps
Order Code: 78094




4" Line Voltage Recessed Trims




RT403WH

White Eyeball
Uses 50W R20, PAR20 Lamps
Order Code: 77606




RT409WH/A

Albalite Lens White Shower Trim
Uses 50W R20, PAR20 Lamps
Order Code: 77605

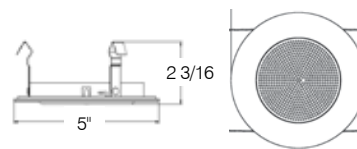


RT406BL

Open Black Gimbal with Black Ring
Uses 50W R20, PAR20 Lamps
Order Code: 78096




RT409WH/FL

Fresnel Glass White Shower Trim
Uses 50W R20, PAR20 Lamps
Order Code: 77672

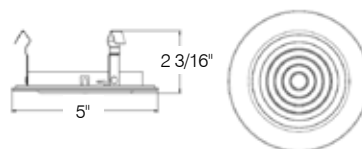


RT406WH

Open White Gimbal with White Ring
Uses 50W R20, PAR20 Lamps
Order Code: 78342

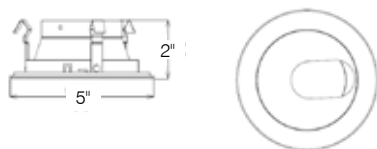


RT421WH

White Baffle with White Wall Wash
Uses 50W R20, PAR20 Lamps
Order Code: 77607




RT407WH

White Pin Hole
Uses 50W R20, PAR20 Lamps
Order Code: 72020

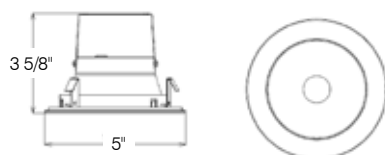

RT429WH

4" White Square Cover with
White Round Gimbal
Uses 50W R20, PAR20 Lamps
Order Code: 77608



5" Line Voltage Recessed Can

New Construction IC Airtight

RH5/N/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt PAR/BR30

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.




LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

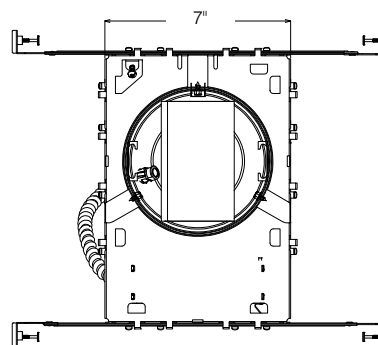

ORDERING INFORMATION

Code: 77604

Item # RH5/N/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

5" Line Voltage Recessed Can

Remodel Construction Non-IC

RH5/R

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max PAR/R20

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

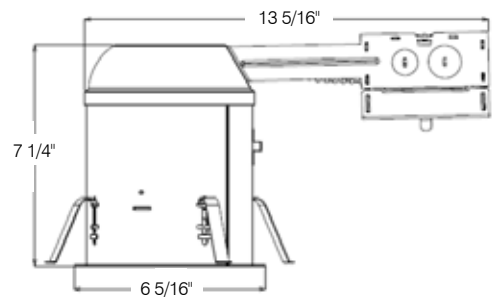

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 78097

Item # RH5/R

Topaz offers numerous lamp options.

Consult your sales rep.

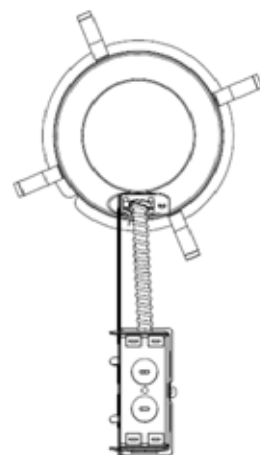

5" Line Voltage Recessed Can

Remodel Construction IC Airtight

RH5/R/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt PAR/BR30

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

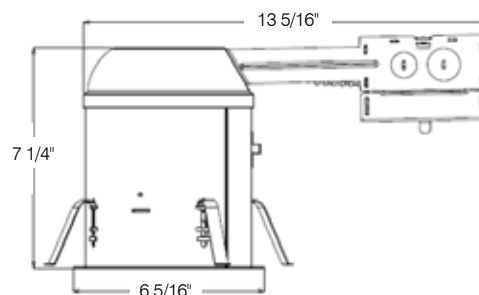

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction




ORDERING INFORMATION

Code: 77603

Item # RH5/R/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

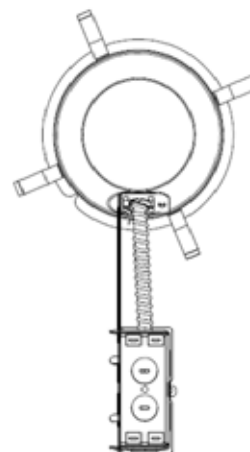


5" Line Voltage Recessed Trims




RT500CL/WH

Deep Clear Reflector with White Ring
Uses 75W Max BR30, PAR30 Lamps
Order Code: 79163

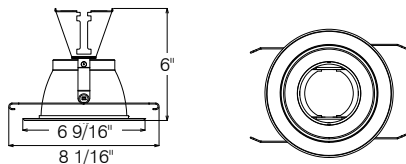


RT503WH

White Eyeball
Uses 75W MAX PAR30 Lamps
Order Code: 79965




RT501WH

White Shallow Baffle Trim
Uses 75W Max BR30, PAR30 Lamps
Order Code: 77601

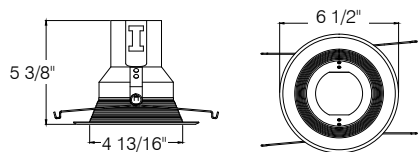


RT509WH/A

Albalite Glass Lens with White Ring
Uses 40W A19, 50W PAR20 Lamps
Order Code: 79410




RT502WH

White Step Baffle and White Ring
Uses 75W Max BR30, PAR30 Lamps
Order Code: 79164

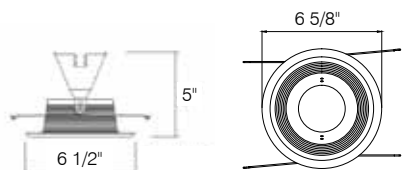


RT509WH/FL

Frenal Shower Trim
with White Ring
Uses 40W A19, 50W PAR20 Lamps
Order Code: 77602



RT502WH/AT

Air Tight Matte White Ring
with Torsion Spring
Uses 75W MAX BR30, PAR30 Lamps
Order Code: 79964



6" Line Voltage Recessed Can

New Construction IC

RH6/N/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX


Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

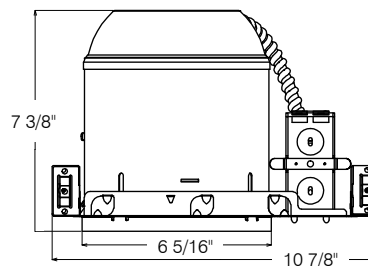

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 77560

Item # RH6/N/IC

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction IC Airtight

RH6/N/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

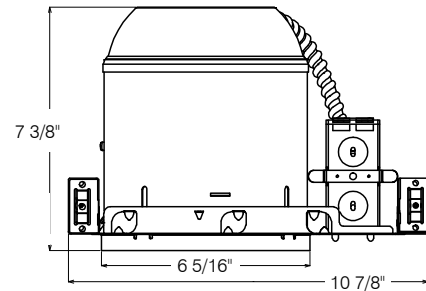


LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

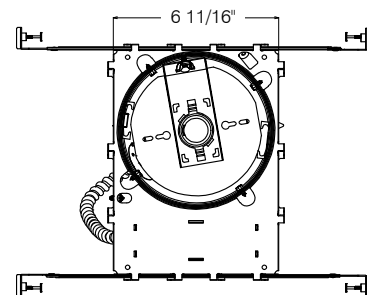

ORDERING INFORMATION

Code: 79133

Item # RH6/N/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction IC Airtight Floating Socket

RH6/N/IC/AT /FL

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains one 1-1/8" and six 7/8" knockouts and four Romex pryouts with strain relief.

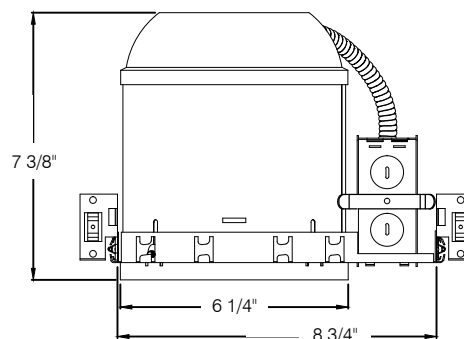


LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 77562

Item # RH6/N/IC/AT/FL

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction IC Airtight

RH6/N/IC/ATS

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME/HOUSING

Plaster frame is galvanized steel. The housing is steel. The housing can be removed from the plaster frame to provide access to the junction box.




INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

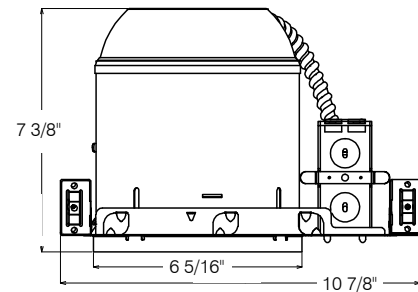


LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

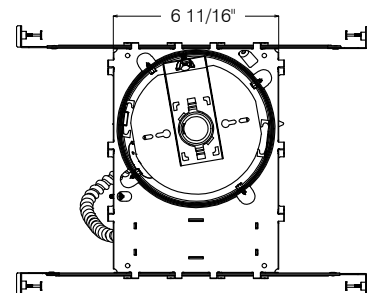

ORDERING INFORMATION

Code: 78516

Item # RH6/N/IC/ATS

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction Shallow Non-IC

RH6/N/S

PRODUCT SPECIFICATIONS

LAMP

120 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation





INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

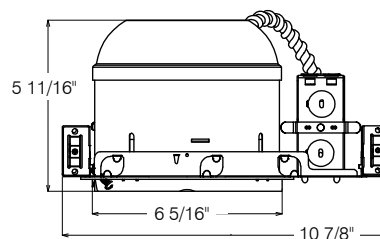

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 72211

Item # RH6/N/S

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction Shallow IC

RH6/N/S/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.





INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

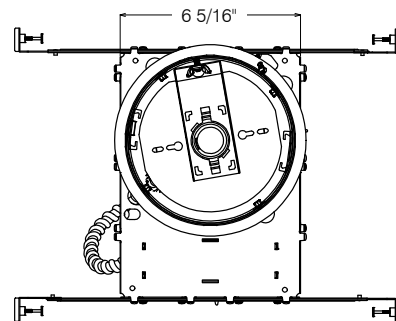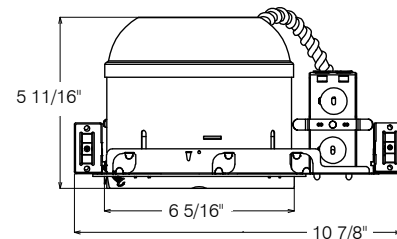

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 77664

Item # RH6/N/S/IC

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

New Construction Shallow IC Airtight

RH6/N/S/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation





INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

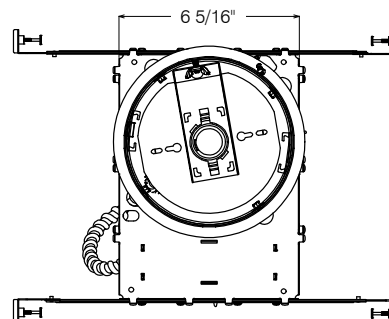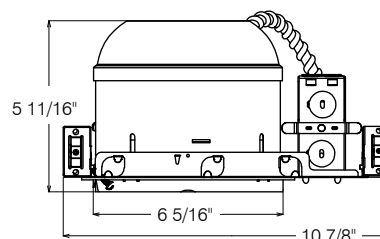

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 78532

Item # RH6/N/S/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can

Remodel Construction IC

RH6/R/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

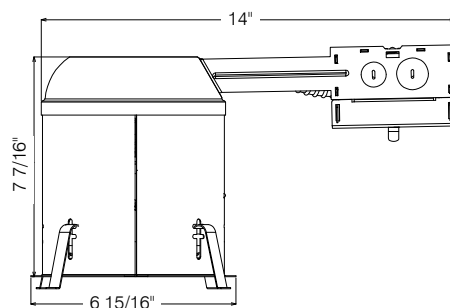

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 77661

Item # RH6/R/IC

Topaz offers numerous lamp options.

Consult your sales rep.

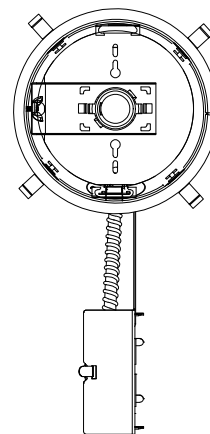

6" Line Voltage Recessed Can

Remodel Construction IC Airtight

RH6/R/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

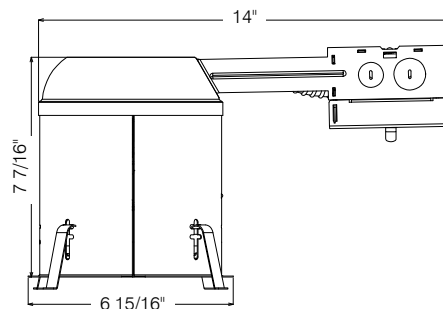

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction




ORDERING INFORMATION

Code: 79415

Item # RH6/R/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

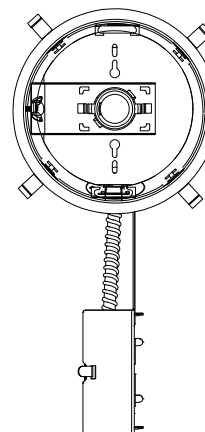

6" Line Voltage Recessed Can

Remodel Construction Shallow Non-IC

RH6/R/S

PRODUCT SPECIFICATIONS

LAMP

120 Watt Max

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

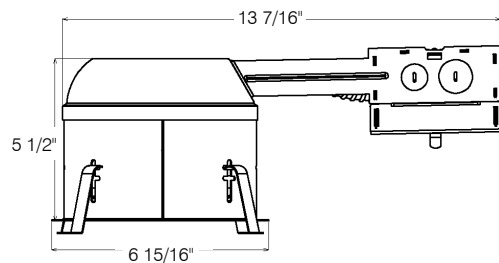

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 77665

Item # RH6/R/S

Topaz offers numerous lamp options.

Consult your sales rep.

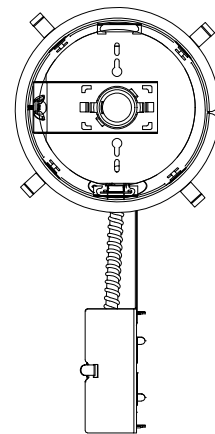

6" Line Voltage Recessed Can

Remodel Construction Shallow IC

RH6/R/S/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

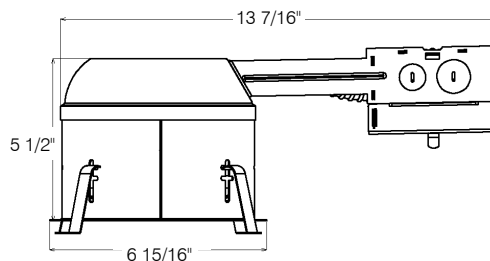

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 77662

Item # RH6/R/S/IC

Topaz offers numerous lamp options.

Consult your sales rep.

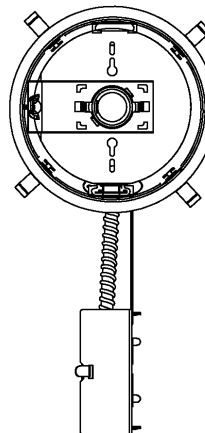

6" Line Voltage Recessed Can

Remodel Construction Shallow IC Airtight

RH6/R/S/IC/AT

PRODUCT SPECIFICATIONS

LAMP

120 Watt Max

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR


Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.



INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

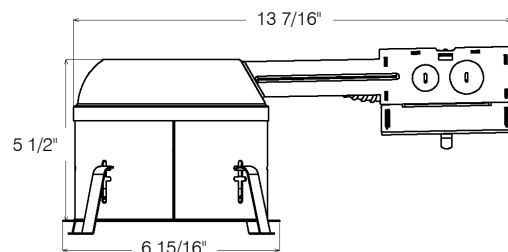

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction




ORDERING INFORMATION

Code: 78534

Item # RH6/R/S/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

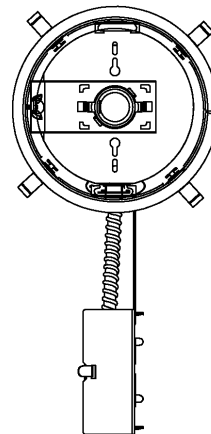


6" Line Voltage Recessed Trims




RT600CL/CH/R30

Clear Reflector with Chrome Ring
Uses BR/ PAR30 Lamps
Order Code: 71902



RT600WH/R30

White Reflector with White Ring
Uses BR/ PAR30 Lamps
Order Code: 79162




RT600CL/WH/R30

Clear Reflector with White Ring
Uses BR/ PAR30 Lamps
Order Code: 77703




RT600WH/R40

White Reflector with White Ring
Uses R40/ PAR38 Lamps
Order Code: 78416




RT600CL/WH/R40

Clear Reflector with White Ring
Uses R40/ PAR38 Lamps
Order Code: 78366



RT601BL

Black Step Baffle with Black Ring
Uses BR/ PAR30 Lamps
Order Code: 79604




RT600GO/WH/R30

Gold Reflector with White Ring
Uses BR/ PAR30 Lamps
Order Code: 79552



RT601BL/WH

Black Step Baffle with White Ring
Uses BR/ PAR30 Lamps
Order Code: 77102




6" Line Voltage Recessed Trims



RT601SCH

All Satin Chrome Step Baffle
Uses BR/ PAR30 Lamps
Order Code: 70960




RT602BL/WH/AT

Socket Supporting Black Step Baffle with
White Ring, Airtight, Torsion Springs,
for Floating Medium Base Socket
Uses BR/ PAR30 Lamps
Order Code: 79610




RT601WH

White Step Baffle with White Ring
Uses BR/ PAR30 Lamps
Order Code: 79135




RT602GW/AT

Socket Supporting Gloss White Step
Baffle with White Ring, Airtight, Torsion
Springs, for Floating Medium Base Socket
Uses BR/ PAR30 Lamps
Order Code: 77565

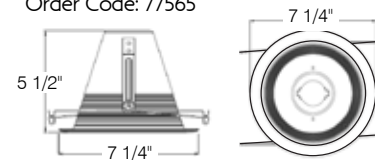


RT602BL

Black Step Baffle with Black Ring
Uses R40/ PAR38 Lamps
Order Code: 78102




RT602GW/AT/FS

Socket Supporting Gloss White Step
Baffle with White Ring, Airtight, Friction
Springs, for Floating Medium Base Socket
Uses BR/ PAR30 Lamps
Order Code: 77564

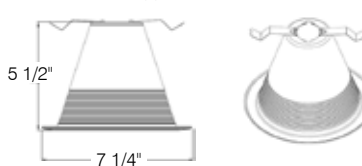


RT602BL/WH

Black Step Baffle with White Ring
Uses R40/ PAR38 Lamps
Order Code: 79179



RT602SCH

Satin Chrome Step Baffle with
Satin Chrome Ring
Uses R40, PAR38 Lamps
Order Code: 78103



6" Line Voltage Recessed Trims



RT602WH

White Step Baffle with White Ring
Uses R40, PAR38 Lamps
Order Code: 77673




RT604SCH

Open Satin Chrome Trim
Uses BR/ PAR30 Lamps
Order Code: 78107



RT602WH/AT

Socket Supporting Matte White Step
Baffle with White Ring, Airtight,
Torsion Springs, for Floating Medium
Base Socket
Uses BR/ PAR30 Lamps
Order Code: 77598

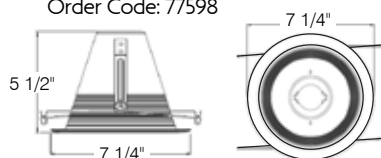


RT604BL

Open Black Trim
Uses BR/ PAR30 Lamps
Order Code: RT604BL



RT603BL

Black Eyeball
Uses BR/ PAR30 Lamps
Order Code: 79573




RT604WH

Open White Trim
Uses BR/ PAR30 Lamps
Order Code: 78762



RT603WH

White Eyeball
Uses BR/ PAR30 Lamps
Order Code: 79551



RT605WH

Open White Ring
Uses R40/ PAR38 Lamps
Order Code: 70959




6" Line Voltage Recessed Trims





RT606BL/R30

Open Black Gimbal
Uses BR/ PAR30 Lamps
Order Code: RT606BL/R30




RT606WH/R30

Open White Gimbal with White Ring
Uses BR/ PAR30 Lamps
Order Code: 78115




RT606BL/R40

Open Black Gimbal
Uses R40/ PAR38 Lamps
Order Code: RT606BL/R40




RT606WH/R40

Open White Gimbal with White Ring
Uses R40/ PAR38 Lamps
Order Code: 70023




RT606CH/R30

Open Chrome Gimbal
Uses BR/ PAR30 Lamps
Order Code: RT606CH/R30




RT609WH/A

Albalite Lens Shower Trim
with Metal Ring
Uses 40W A19 Lamps
Order Code: 79136




RT606CH/R40

Open Chrome Gimbal
Uses R40/ PAR38 Lamps
Order Code: RT606CH/R40



RT609WH/A/P

Albalite Lens Shower Trim
with Plastic Ring
Uses 40W A19 Lamps
Order Code: 79137




6" Line Voltage Recessed Trims



RT609WH/DO

Drop Opal Lens with White Metal Ring
Uses 40W A19 Lamps


Order Code: RT609WH/DO



RT609WH/FR/P

Frosted Glass Lens with
White Plastic Ring Shower Trim
Uses 40W A19 Lamps


Order Code: 79160

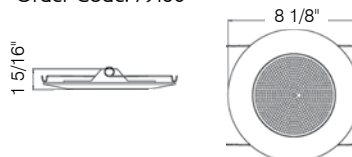

RT609WH/DO/P

Drop Opal Lens with White Plastic Ring
Uses 40W A19 Lamps



Order Code: 75971



RT610CL/WH

Clear Deep Reflector with White Ring
Uses 60W A19 Lamps

Order Code: 79156



RT609WH/FL

Fresnel Glass Lens with White Metal Ring
Shower Trim

Uses 40W A19 Lamps


Order Code: 77559



RT610GO/WH

Gold Deep Reflector with White Ring
Uses 60W A19 Lamps

Order Code: 70709




RT609WH/FL/P

Fresnel Glass Lens with White Plastic Ring
Shower Trim

Uses 40W A19 Lamps


Order Code: 79160



RT610WH

White Deep Reflector with White Ring
Uses 60W A19 Lamps

Order Code: 79154




6" Line Voltage Recessed Trims




RT611BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring
Uses 60W A19 Lamps
Order Code: 70014




RT613WH

White Step Baffle with White Eyeball
Uses BR/ PAR30 Lamps
Order Code: 78114




RT611WH

Clear Deep Reflector with White Step Baffle and White Ring
Uses 60W A19
Order Code: 79158




RT613WH/R

White Baffle with White Regressed Eyeball
Uses BR/ PAR30 Lamps
Order Code: 77599





RT612WH

White Step Baffle with White Ring
Uses BR/ PAR30 Lamps
Order Code: 79159

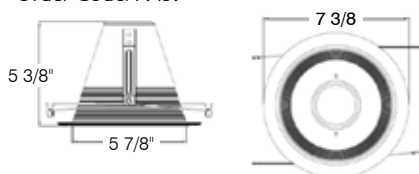


RT614C

Clear Deep Smooth Cone
Uses BR/ PAR30 Lamps
Order Code: 79851

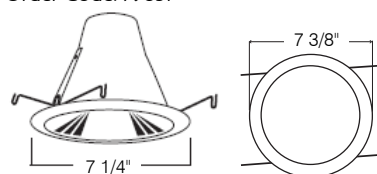


RT613BL/WH

Black Step Baffle with White Eyeball
Uses BR30/ PAR30 Lamps
Order Code: RT613BL/WH



RT614GW

Gloss White Deep Smooth Cone
Uses BR/ PAR30 Lamps
Order Code: 79850

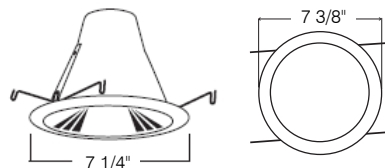


6" Line Voltage Recessed Trims





RT616WH

Open White Baffle Gimbal
with White Ring
Uses BR/ PAR30 Lamps
Order Code: 78117




RT620WH

White Wall Wash
Uses BR/ PAR30 Lamps
Order Code: 78077





RT616WH/R40

Open White Baffle Gimbal
with White Ring
Uses BR/ PAR30 Lamps
Order Code: RT616/R40




RT621BL/WH

Black Baffle with White Wall Wash
Uses BR/ PAR30 Lamps
Order Code: 78802





RT619WH/A/P

Albalite Glass Lens with White Plastic Ring,
Clear Deep Reflector
Uses 60W A19 Lamps
Order Code: 77572

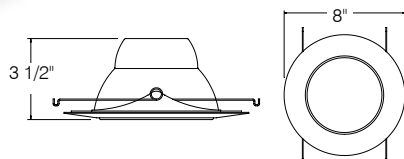

RT621WH

White Baffle with White Wall Wash
Uses BR/ PAR30 Lamps
Order Code: 77600



6" Line Voltage Recessed Can for Sloped Ceilings

New Construction for Sloped Ceiling IC

RH6/NSL/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

HOUSING

Designed for use in ceiling with slopes from 2/12 to 6/12.

SOCKET

The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.



INSTALLATION


BAR HANGER

Pre-installed nails easily install in regular or engineered lumber.

Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX


Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

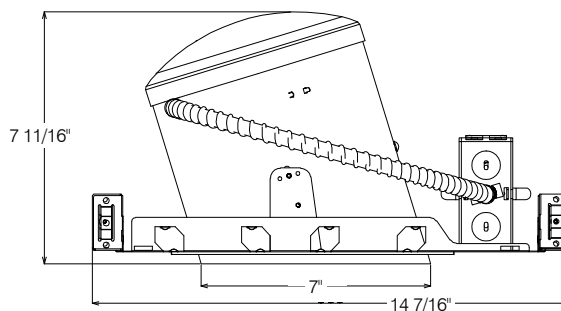

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 70033

Item # RH6/NSL/IC

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can for Sloped Ceilings

New Construction for Sloped Ceiling IC Airtight

RH6/NSL/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

HOUSING



Designed for use in ceiling with slopes from 2/12 to 6/12.

SOCKET

The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

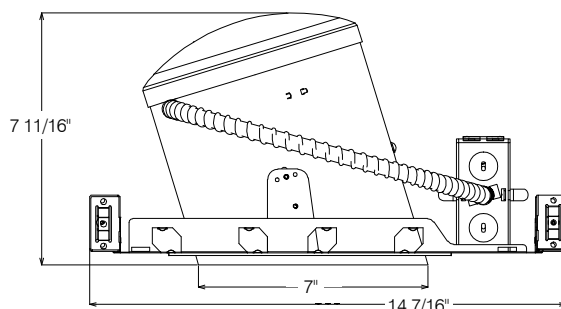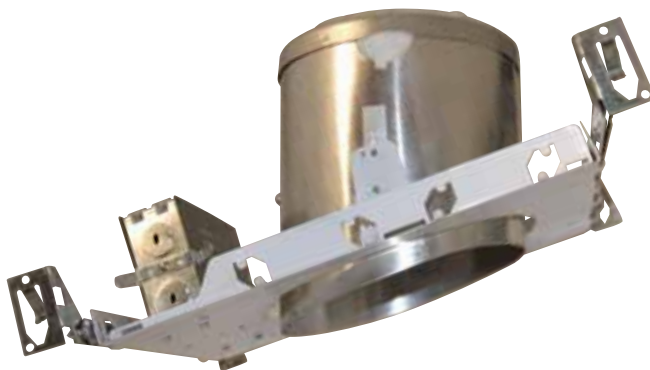

INSTALLATION


BAR HANGER

Pre-installed nails easily install in regular or engineered lumber.

Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.



LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 78515

Item # RH6/NSL/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can for Sloped Ceilings

New Construction for Sloped Ceiling IC Airtight

RH6/NSL/IC/BOX

PRODUCT SPECIFICATIONS

LAMP

100 Watt Max

HOUSING


Designed for use in ceiling with slopes from 2/12 to 6/12.

SOCKET

The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

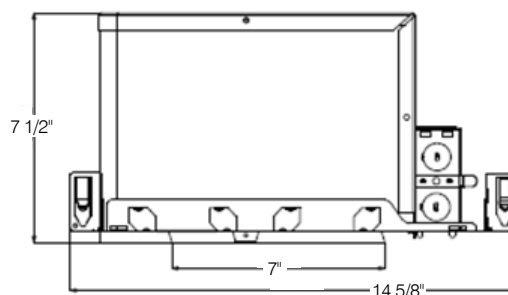

INSTALLATION


BAR HANGER

Pre-installed nails easily install in regular or engineered lumber.

Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.



LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 78119

Item # RH6/NSL/IC/BOX

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can for Sloped Ceilings

Remodel Construction for Sloped Ceiling IC

RH6/RSL/IC

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

HOUSING

Designed for use in ceiling with slopes from 2/12 to 6/12.

SOCKET


The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

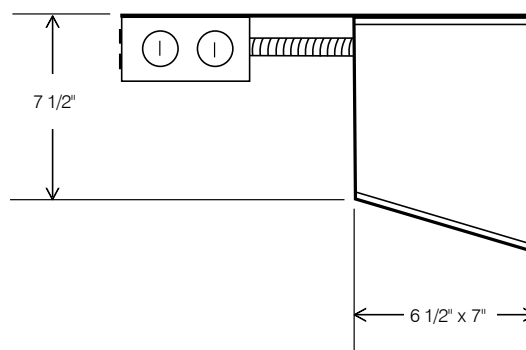

INSTALLATION


JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 77663

Item # RH6/RSL/IC

Topaz offers numerous lamp options.

Consult your sales rep.

6" Line Voltage Recessed Can for Sloped Ceilings

Remodel Construction for Sloped Ceiling IC Airtight

RH6/RSL/IC/AT

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max

HOUSING


Designed for use in ceiling with slopes from 2/12 to 6/12.

SOCKET

The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

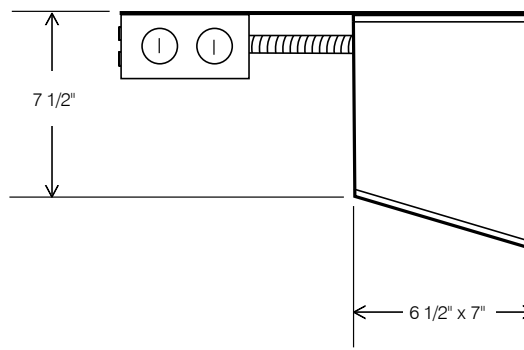

INSTALLATION

JUNCTION BOX


Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Air tight construction



ORDERING INFORMATION

Code: 79536

Item # RH6/RSL/IC/AT


Topaz offers numerous lamp options.

Consult your sales rep.


6" Line Voltage Recessed Can for Sloped Ceilings





RT600CL/WH/SC
Clear Reflector with White Ring
Uses BR40, PAR38 Lamps
Order Code: 70026

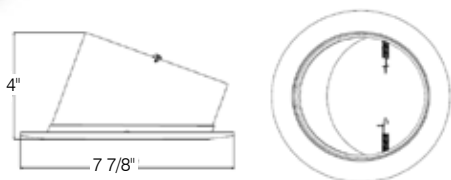


RT603WH/WH/SC
White Baffle with White Eyeball
Uses BR/ PAR30 Lamps
Order Code: 78129

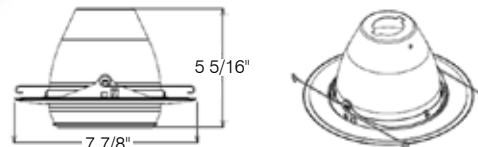


RT602BL/WH/SC
Black Baffle with White Ring
Uses BR40, PAR38 Lamps
Order Code: 70025

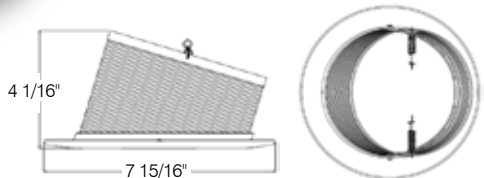


RT604BL/WH/SC
Black Baffle with White Eyeball
Uses BR/ PAR30 Lamps
Order Code: RT604BL/WH/SC

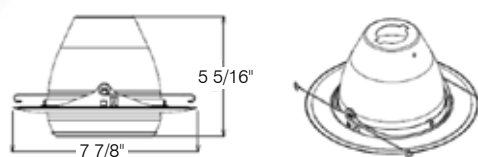

RT602WH/SC
White Baffle with White Ring
Uses BR40, PAR38 Lamps
Order Code: 78154

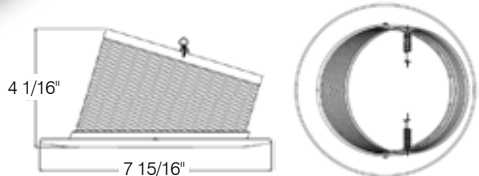

RT604WH/SC
White Baffle with White Eyeball
Uses BR/ PAR30 Lamps
Order Code: 78129

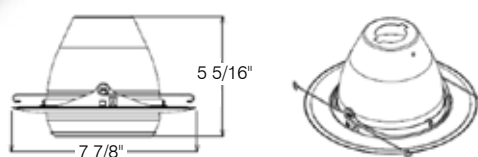



GU10



4" GU10 Recessed Can

New Construction GU10 Non-IC

RH4/NG



PRODUCT SPECIFICATIONS

LAMP

50W Max 120V GU10 MR16

PLASTER FRAME

Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 14-1/2" to 24" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 1/2" knockouts and Romex pryouts with strain relief.

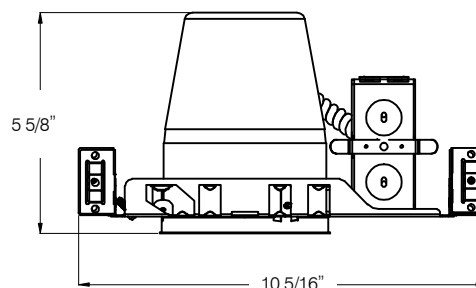

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 79550

Item # RH4/NG

Topaz offers numerous lamp options.

Consult your sales rep.

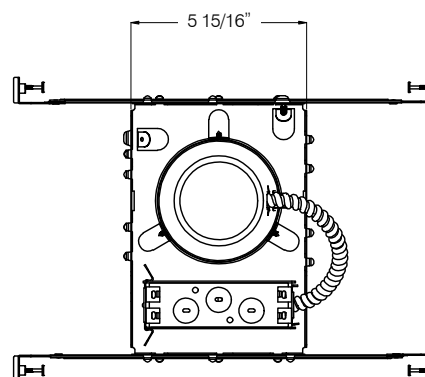

4" GU10 Recessed Can

New Construction GU10 IC Airtight

RH4/NG/IC/AT

PRODUCT SPECIFICATIONS

LAMP
50W Max 120V GU10 MR16

PLASTER FRAME
Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.


THERMAL PROTECTOR
Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.



INSTALLATION


BAR HANGER
Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX
Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

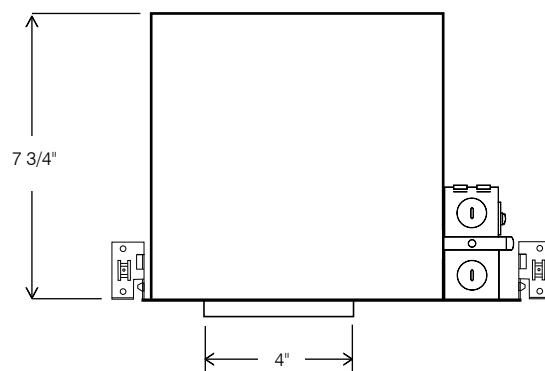

LABELS AND LISTINGS

UL Listed for Damp Location
UL Listed for Feed Through wiring
Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 77704
Item # RH4/NG/IC/AT
*Topaz offers numerous lamp options.
Consult your sales rep.*

4" GU10 Line Voltage Recessed Can

Remodel Construction GU10 Non-IC

RH4/RG



PRODUCT SPECIFICATIONS

LAMP

50W Max 120V GU10 MR16

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.


REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

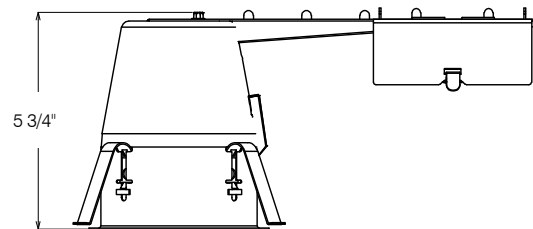

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 78282

Item # RH4/RG

Topaz offers numerous lamp options.

Consult your sales rep.


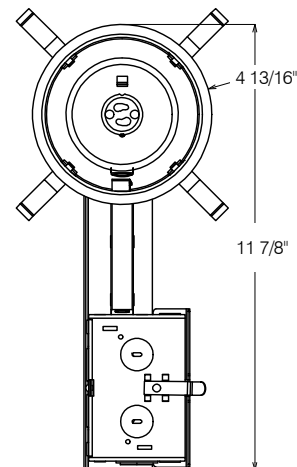


4" GU10 Line Voltage Recessed Trims




RT400CL/CH/LV

Clear Reflector with Chrome Ring
Uses 50W 120V GU10 Lamps
Order Code: 78161

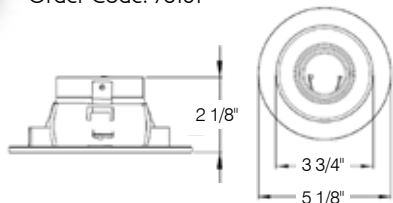


RT400GO/WH/LV

Gold Reflector with White Ring
Uses 50W 120V GU10 Lamps
Order Code: RT400GO/WH/LV

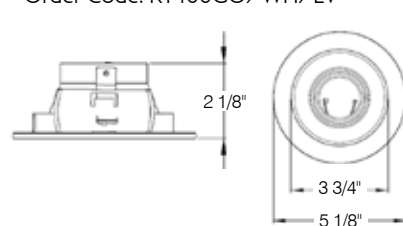


RT400CL/NK/LV

Clear Reflector with Brushed Nickel Ring
Uses 50W 120V GU10 Lamps
Order Code: 79553

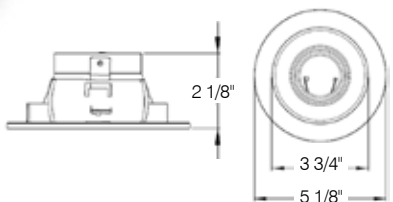


RT400BL/WH/LV

Black Reflector with White Ring
Uses 50W 120V GU10 Lamps
Order Code: RT400BL/WH/LV

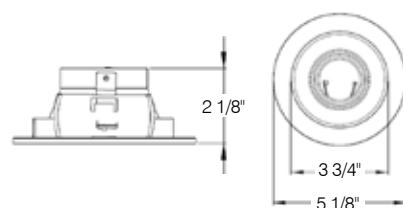


RT400CL/WH/LV

Clear Reflector with White Ring
Uses 50W 120V GU10 Lamps
Order Code: 78160

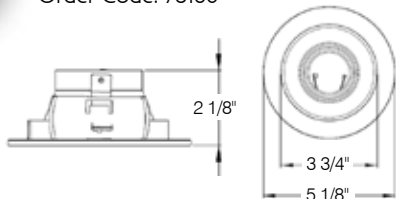


RT401BL/LV

All Steel Black Baffle with Black Ring
Uses 50W 120V GU10 Lamps
Order Code: 78156

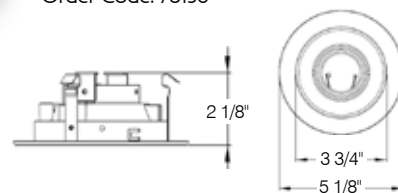


RT400WH/LV

White Reflector with White Ring
Uses 50W 120V GU10 Lamps
Order Code: 79128

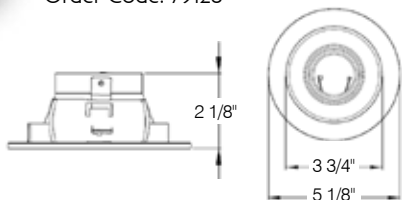

RT401BL/WH/LV

All Steel Black Baffle with White Ring
Uses 50W 120V GU10 Lamps
Order Code: 7910

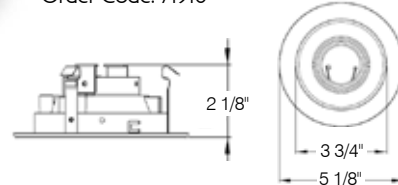


4" GU10 Line Voltage Recessed Trims




RT401BL/SCH/LV

All Steel Black Baffle with Satin Ring
Uses 50W 120V GU10 Lamps
Order Code: RT401BL/SCH/LV

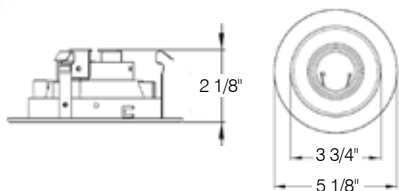


RT407WH/LV

White Pin Hole
Uses 50W 120V GU10 Lamps
Order Code: 72020




RT401SCH/LV

All Steel Satin Baffle with Satin Ring
Uses 50W 120V GU10 Lamps
Order Code: 78159

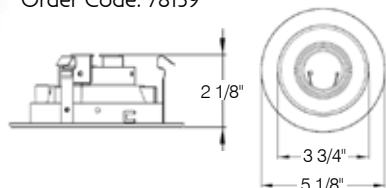


RT408BL/LV

Black Slot Aperture
Uses 50W 120V GU10 Lamps
Order Code: 78166

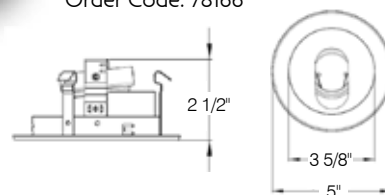


RT401WH/LV

All Steel White Baffle with White Ring
Uses 50W 120V GU10 Lamps
Order Code: 79127

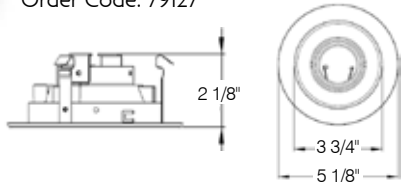


RT408WH/LV

White Slot Aperture
Uses 50W 120V GU10 Lamps
Order Code: 78165

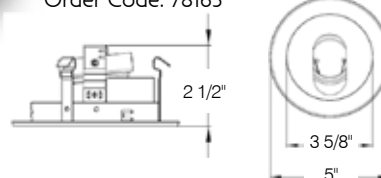


RT406WH/LV

Shallow White Baffle with White Gimbal
Uses 50W 120V GU10 Lamps
Order Code: 77669

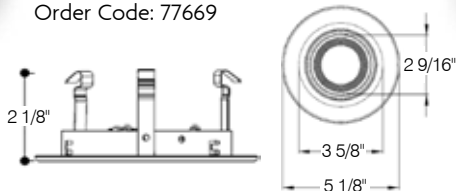

RT409WH/DO/LV

Drop Opal Shower Trim
Uses 50W 120V GU10 Lamps
Order Code: 78178

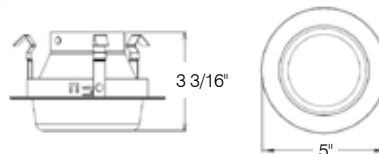


4" GU10 Line Voltage Recessed Trims




RT409WH/FL/LV

Fresnel Glass with White Trim
Uses 50W 120V GU10 Lamps
Order Code: 77670




RT418WH/LV

White Baffle Pin Hole with White Ring
Uses 50W 120V GU10 Lamps
Order Code: RT418WH/LV

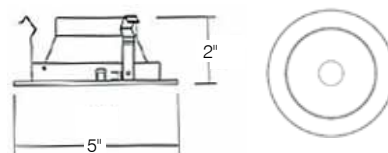


RT413BL/BL/LV

Deep Black Baffle with Black Eyeball
Uses 50W 120V GU10 Lamps
Order Code: RT413BL/BL/LV

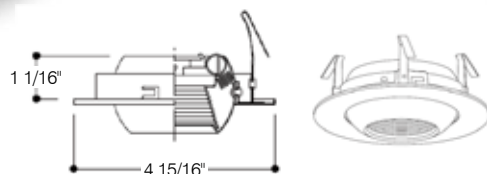


RT421WH/LV

All White Baffle Wall Wash
Uses 50W 120V GU10 Lamps
Order Code: 78279




RT413WH/LV

Deep White Baffle with White Eyeball
Uses 50W 120V GU10 Lamps
Order Code: 78362

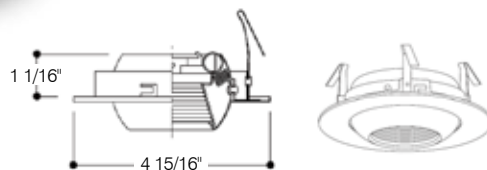


RT422CH/LV

Chrome Square Gimbal with Chrome Square Body
Uses 50W 120V GU10 Lamps
Order Code: 78171

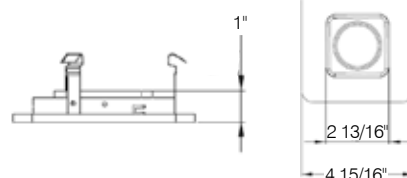


RT418BL/WH/LV

Black Baffle Pin Hole with White Ring
Uses 50W 120V GU10 Lamps
Order Code: RT418BL/WH/LV

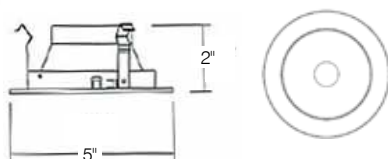

RT422NK/LV

Nickel Square Gimbal with Nickel Square Body
Uses 50W 120V GU10 Lamps
Order Code: 78172

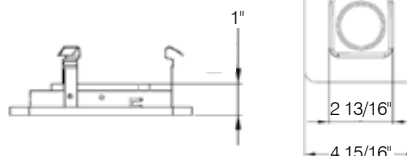


4" GU10 Line Voltage Recessed Trims





RT422WH/LV

White Square Gimbal with
White Square Body
Uses 50W 120V GU10 Lamps
Order Code: 77534

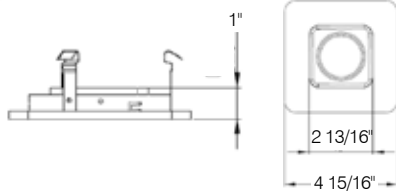


RT432NK/LV

Round Brushed Nickel Gimbal
Uses 50W 120V GU10 Lamps
Order Code: 78176

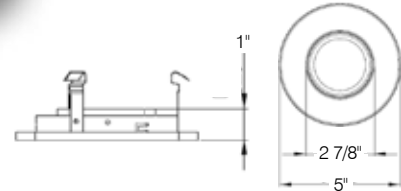


RT431BL/LV

Deep Black Baffle with
Round Black Gimbal
Uses 50W 120V GU10 Lamps
Order Code: RT431BL/LV

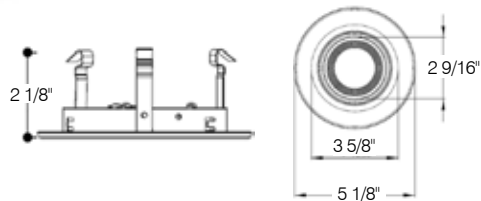


RT432WH/LV

Round White Gimbal
Uses 50W 120V GU10 Lamps
Order Code: 79169

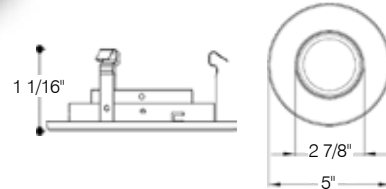


RT431BL/WH/LV

Deep Black Baffle with
Round White Gimbal
Uses 50W 120V GU10 Lamps
Order Code: RT431BL/WH/LV

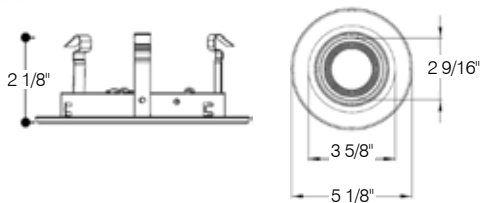


RT436BL/LV

Die Cast Black Rotating Beacon
Uses 50W 120V GU10 Lamps
Order Code: RT436BL/LV

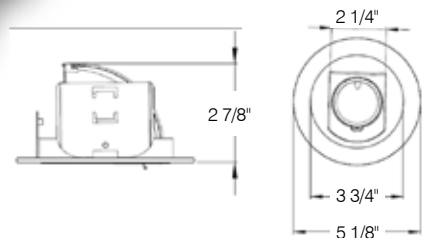


RT431WH/LV

Deep White Baffle with
Round White Gimbal
Uses 50W 120V GU10 Lamps
Order Code: RT431WH/LV

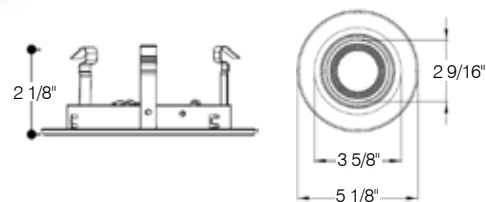

RT436NK/LV

Die Cast Nickel Rotating Beacon
Uses 50W 120V GU10 Lamps
Order Code: RT436NK/LV

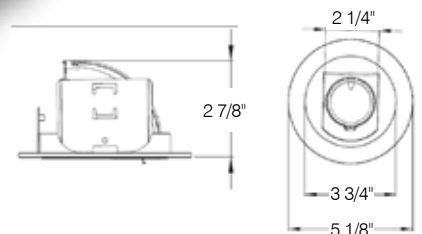


4" GU10 Line Voltage Recessed Trims




RT436SCH/LV

Die Cast Satin Chrome
Rotating Beacon
Uses 50W 120V GU10 Lamps
Order Code: RT436SCH/LV

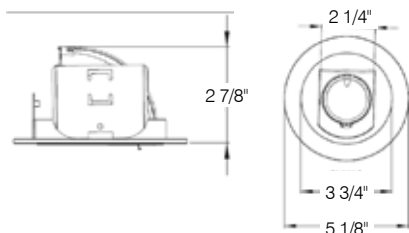

RT436WH/LV

Die Cast White Rotating Beacon
Uses 50W 120V GU10 Lamps
Order Code: 79554

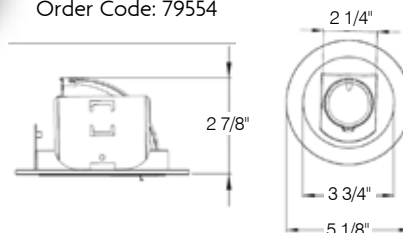



LOW VOLTAGE



3" Low Voltage Recessed Can

New Construction Low Voltage Non-IC

RH3/NLV

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

PLASTER FRAME


Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

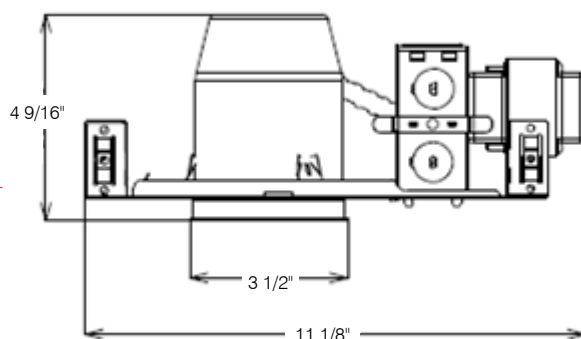


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular, or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

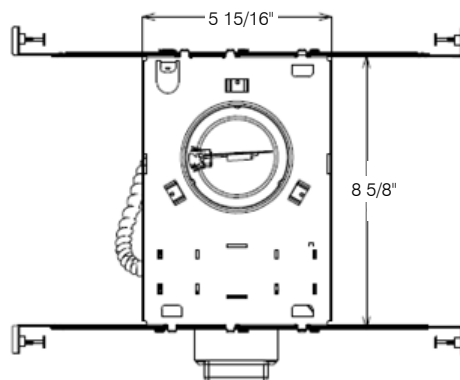

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 78339

Item # RH3/NLV

Topaz offers numerous lamp options.

Consult your sales rep.

3" Low Voltage Recessed Can

New Construction Low Voltage IC Airtight

RH3/NLV/IC/AT

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

HOUSING

Double wall aluminum construction for greater heat dissipation.
Housing adjusts for ceiling up to 1-1/4" thick.

PLASTER FRAME


Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

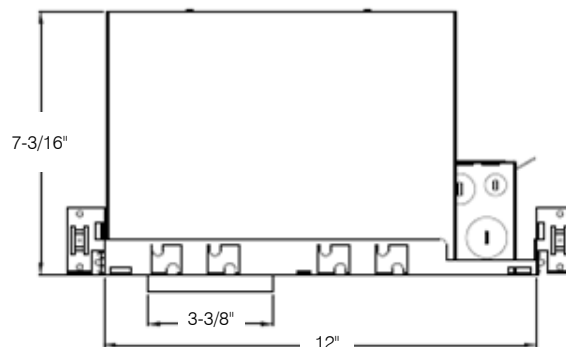


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular, or engineered lumber.
Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

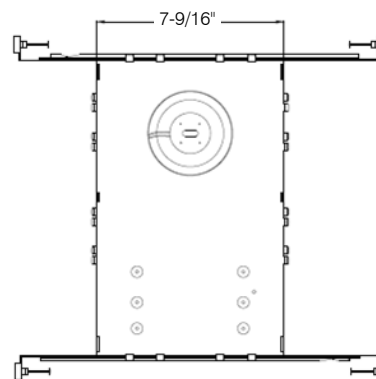

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 77531

Item # RH3/NLV/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

3" Low Voltage Recessed Can

Remodel Construction Low Voltage Non-IC Airtight

RH3/RLV/AT

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

SUPPORT SPRING


Support spring helps support weight of junction box and transformer. Automatically adjusts for different ceiling materials.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

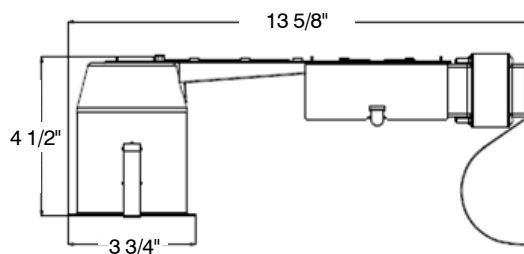

INSTALLATION

JUNCTION BOX


Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction

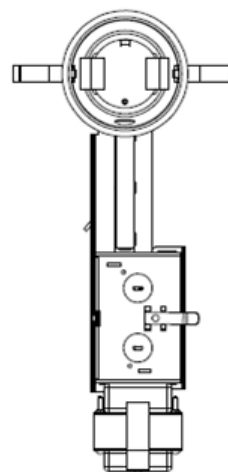

ORDERING INFORMATION

Code: 78370

Item # RH3/RLV/AT

Topaz offers numerous lamp options.


Consult your sales rep.

3" Low Voltage Recessed Trims




RT300CL/WH

Clear Reflector with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 78153

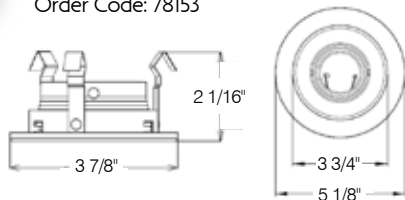


RT301WH

White Baffle with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 79611

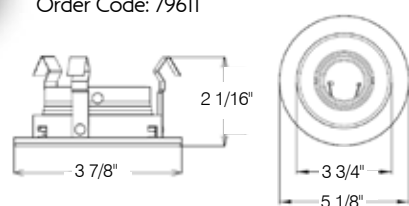


RT301BL/WH

Black Baffle with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 79611

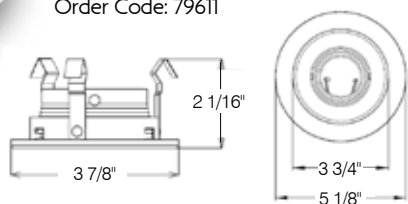

RT332WH

Round White Gimbal
Uses 50W 12V MR16 Lamps
Order Code: 78131

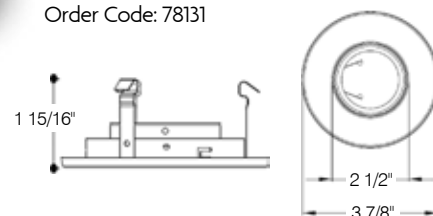

4" Low Voltage Recessed Cans

New Construction Low Voltage Non-IC

RH4/NLV

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

PLASTER FRAME


Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

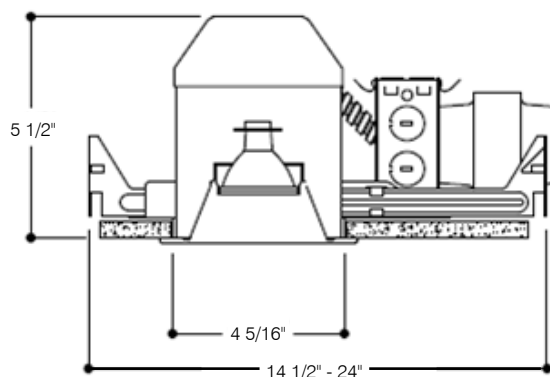


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular, or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

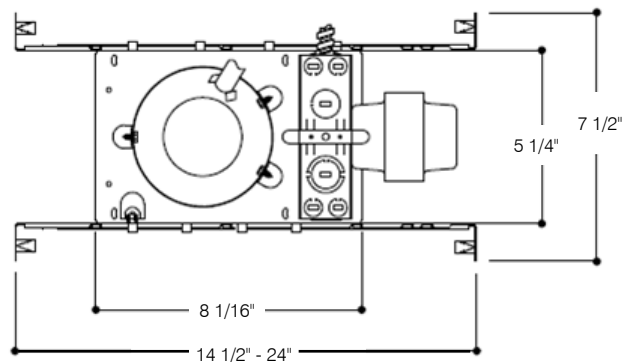

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 77667

Item # RH4/NLV

Topaz offers numerous lamp options.

Consult your sales rep.

4" Low Voltage Recessed Can

New Construction Non-IC High Wattage

RH4/NLV/HW

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max 12 Volt MR16

PLASTER FRAME


Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 75W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

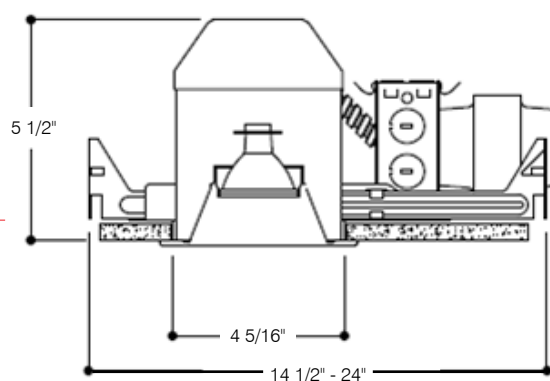


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular, or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

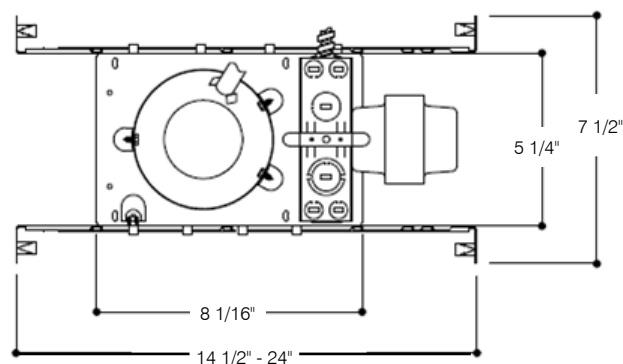

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 78340

Item # RH4/NLV/HW

Topaz offers numerous lamp options.

Consult your sales rep.

4" Low Voltage Recessed Can

New Construction Low Voltage IC Airtight

RH4/NLV/IC/AT

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

HOUSING

Double wall aluminum construction for greater heat dissipation. Gasketed to prevent airflow from heated or air conditioned space. Housing adjusts for ceiling up to 1-1/4" thick.

PLASTER FRAME


Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

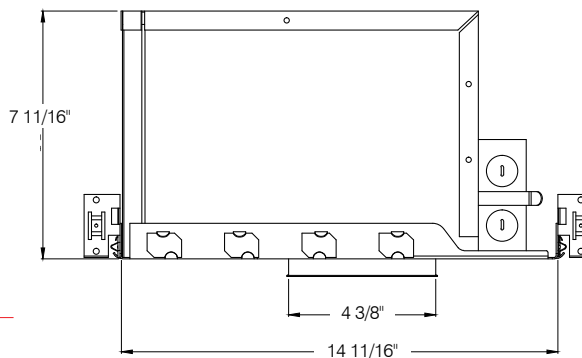


INSTALLATION

BAR HANGER

Pre-installed nails easily install in regular, or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degrees on plaster frame.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

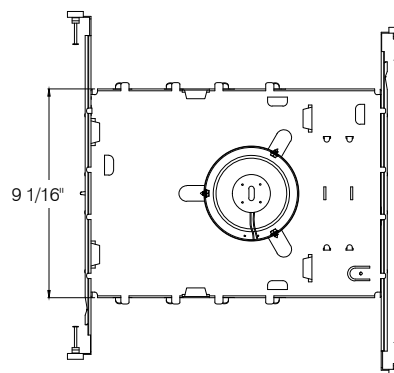

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 79138

Item # RH4/NLV/IC/AT

Topaz offers numerous lamp options.

Consult your sales rep.

4" Low Voltage Recessed Can

Remodel Construction Low Voltage Non-IC

RH4/RLV

PRODUCT SPECIFICATIONS

LAMP

50 Watt Max 12 Volt MR16

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

SUPPORT SPRING


Support spring helps support weight of junction box and transformer. Automatically adjusts for different ceiling materials.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

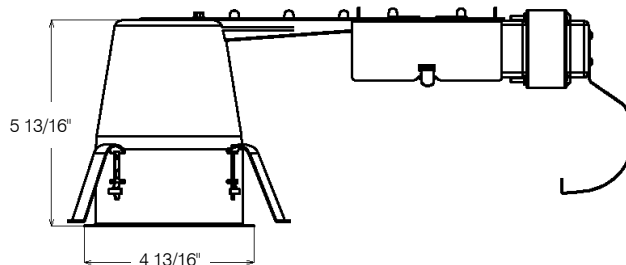

INSTALLATION

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring




ORDERING INFORMATION

Code: 77532

Item # RH4/RLV

Topaz offers numerous lamp options.

Consult your sales rep.

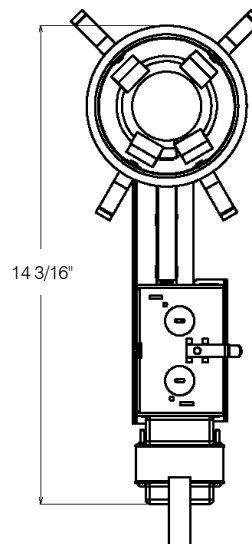

4" Low Voltage Recessed Can

Remodel Construction Low Voltage Non-IC High Wattage

RH4/RLV/HW

PRODUCT SPECIFICATIONS

LAMP

75 Watt Max 12 Volt MR16

REMODEL CLIPS

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

SUPPORT SPRING


Support spring helps support weight of junction box and transformer. Automatically adjusts for different ceiling materials.

TRANSFORMER

120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 75W. For electronic transformer add suffix (E).

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

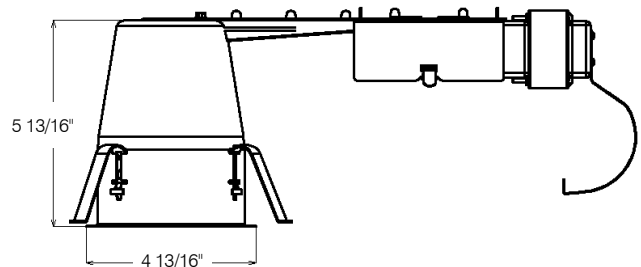

INSTALLATION


JUNCTION BOX

Listed for through branch circuit wiring. Contains six 7/8", one 1-1/8" knockouts and four Romex pryouts with strain relief.

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

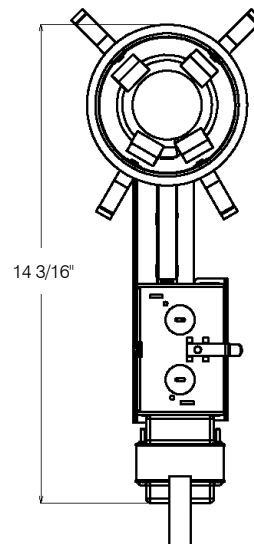

ORDERING INFORMATION

Code: 77668

Item # RH4/RLV/HW

Topaz offers numerous lamp options.


Consult your sales rep.

4" Low Voltage Recessed Trims




RT400CL/CH/LV

Clear Reflector with Chrome Ring
Uses 50W 12V MR16 Lamps
Order Code: 78161

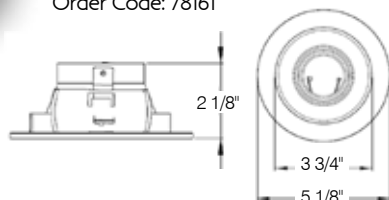


RT400GO/WH/LV

Gold Reflector with White Ring
Uses 50W 12V MR16 Lamps
Order Code: RTGO/WH/LV

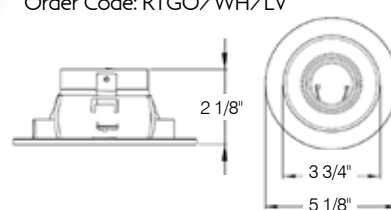


RT400CL/NK/LV

Clear Reflector with Brushed Nickel Ring
Uses 50W 12V MR16 Lamps
Order Code: 79553

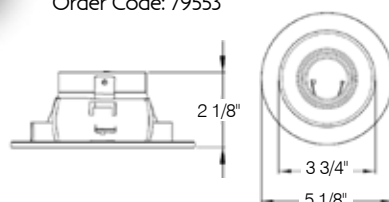


RT400BL/WH/LV

Black Reflector with White Ring
Uses 50W 12V MR16 Lamps
Order Code: RT400BL/WH/LV

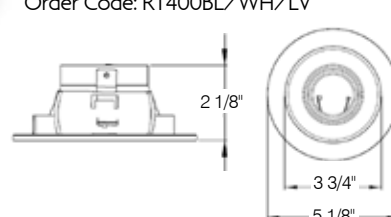


RT400CL/WH/LV

Clear Reflector with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 78160

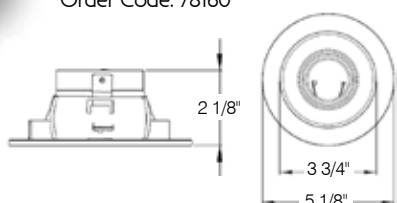


RT401BL/LV

All Steel Black Baffle with Black Ring
Uses 50W 12V MR16 Lamps
Order Code: 78156

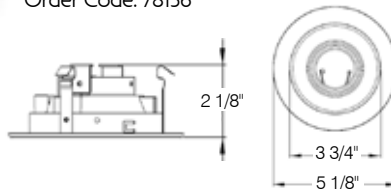


RT400WH/LV

White Reflector with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 79128

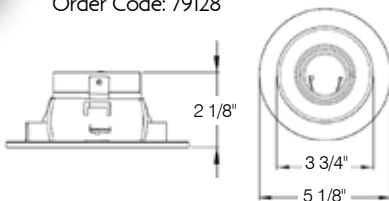

RT401BL/WH/LV

All Steel Black Baffle with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 71910

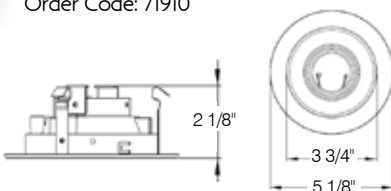


4" Low Voltage Recessed Trims




RT401BL/SCH/LV

All Steel Black Baffle with Satin Ring
Uses 50W 12V MR16 Lamps
Order Code: RT401BL/SCH/LV

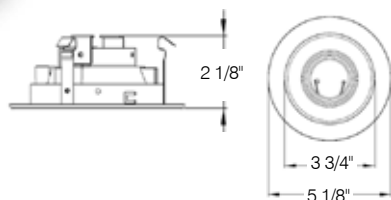


RT407WH/LV

White Pin Hole
Uses 50W 12V MR16 Lamps
Order Code: 72020

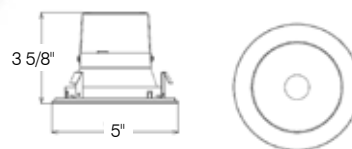


RT401SCH/LV

All Steel Satin Baffle with Satin Ring
Uses 50W 12V MR16 Lamps
Order Code: 78159

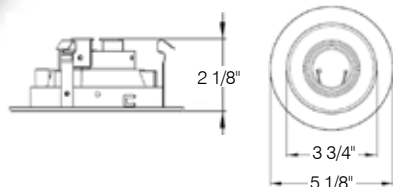


RT408BL/LV

Black Slot Aperture
Uses 50W 12V MR16 Lamps
Order Code: 78166

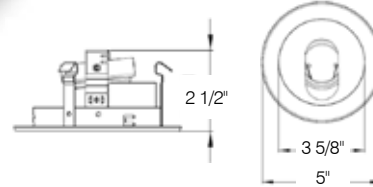


RT401WH/LV

All Steel White Baffle with White Ring
Uses 50W 12V MR16 Lamps
Order Code: 79127

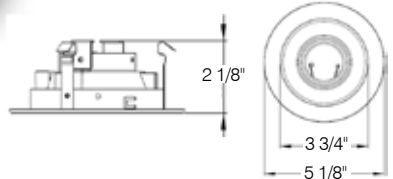


RT408WH/LV

White Slot Aperture
Uses 50W 12V MR16 Lamps
Order Code: 78165

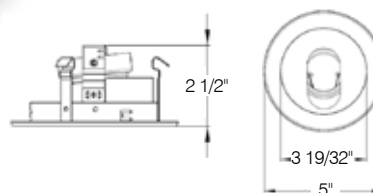


RT406WH/LV

Shallow White Baffle with
White Gimbal
Uses 50W 12V MR16 Lamps
Order Code: 77669

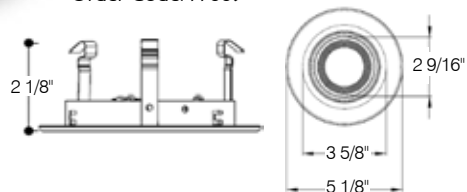

RT409WH/DO/LV

Drop Opal Shower Trim
Uses 50W 12V MR16 Lamps
Order Code: 78178

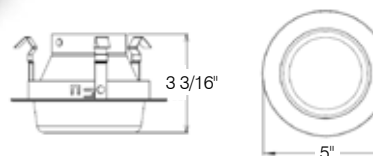


4" Low Voltage Recessed Trims




RT409WH/FL/LV

Fresnel Glass with White Trim
Uses 50W 12V MR16 Lamps
Order Code: 77670

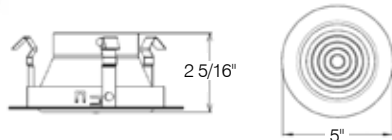


RT418WH/LV

White Baffle Pin Hole with White Ring
Uses 50W 12V MR16 Lamps
Order Code: RT418WH/LV

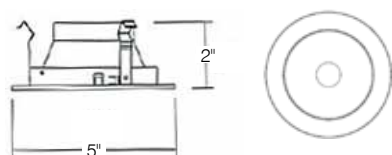


RT413BL/BL/LV

Deep Black Baffle with Black Eyeball
Uses 50W 12V MR16 Lamps
Order Code: RT413BL/BL/LV

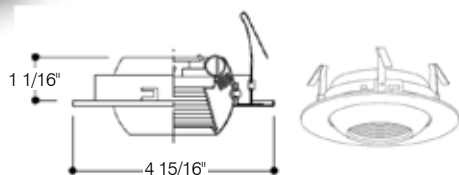


RT421WH/LV

All White Baffle Wall Wash
Uses 50W 12V MR16 Lamps
Order Code: 78279




RT413WH/LV

Deep White Baffle with White Eyeball
Uses 50W 12V MR16 Lamps
Order Code: 78362

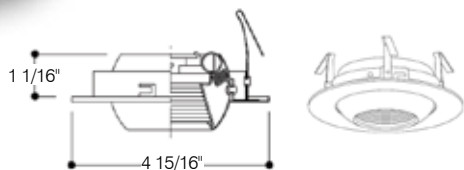


RT422CH/LV

Chrome Square Gimbal with Chrome Square Body
Uses 50W 12V MR16 Lamps
Order Code: 78171

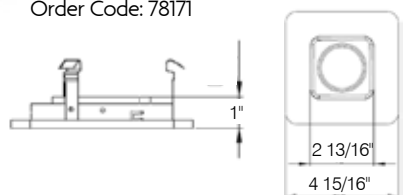


RT418BL/WH/LV

Black Baffle Pin Hole with White Ring
Uses 50W 12V MR16 Lamps
Order Code: RT418BL/WH/LV

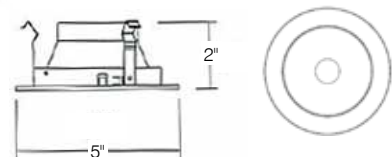

RT422NK/LV

Nickel Square Gimbal with Nickel Square Body
Uses 50W 12V MR16 Lamps
Order Code: 78172

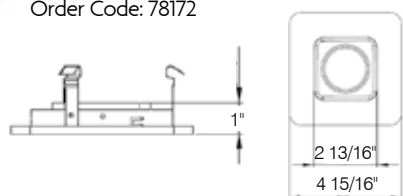


4" Low Voltage Recessed Trims




RT422WH/LV

White Square Gimbal with White Square Body
Uses 50W 12V MR16 Lamps
Order Code: 77534

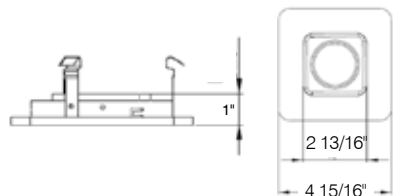


RT432NK/LV

Round Brushed Nickel Gimbal
Uses 50W 12V MR16 Lamps
Order Code: 78176

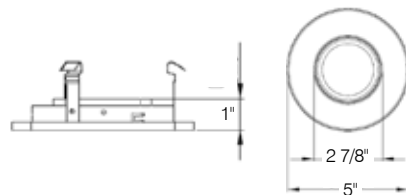


RT431BL/LV

Deep Black Baffle with Round Black Gimbal
Uses 50W 12V MR16 Lamps
Order Code: RT431BL/LV

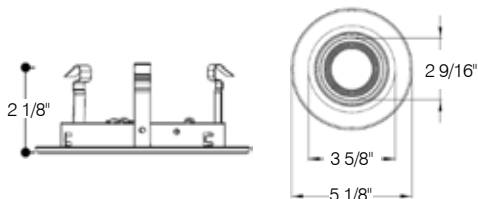


RT432WH/LV

Round White Gimbal
Uses 50W 12V MR16 Lamps
Order Code: 79169

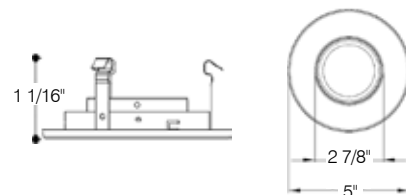


RT431BL/WH/LV

Deep Black Baffle with Round White Gimbal
Uses 50W 12V MR16 Lamps
Order Code: RT431BL/WH/LV

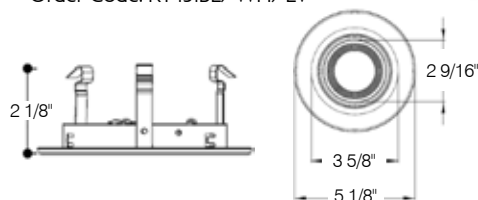


RT436BL/LV

Die Cast Black Rotating Beacon
Uses 50W 12V MR16 Lamps
Order Code: RT436BL/LV

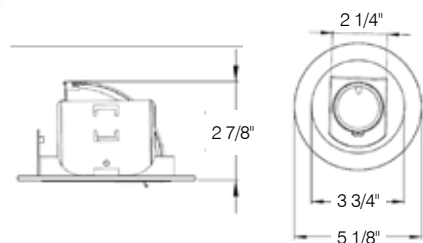


RT431WH/LV

Deep White Baffle with Round White Gimbal
Uses 50W 12V MR16 Lamps
Order Code: 431WH/LV

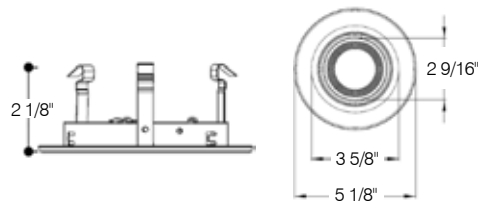

RT436NK/LV

Die Cast Nickel Rotating Beacon
Uses 50W 12V MR16 Lamps
Order Code: RT436NK/LV

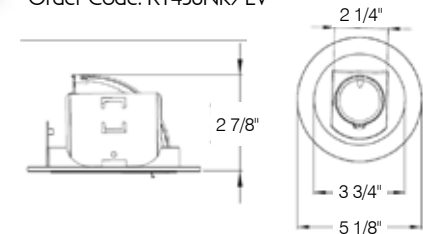


4" Low Voltage Recessed Trims





RT436SCH/LV

Die Cast Satin Chrome Rotating Beacon
Uses 50W 12V MR16 Lamps
Order Code: RT436SCH/LV

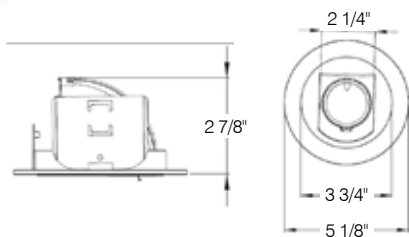

RT436WH/LV

Die Cast White Rotating Beacon
Uses 50W 12V MR16 Lamps
Order Code: 79554

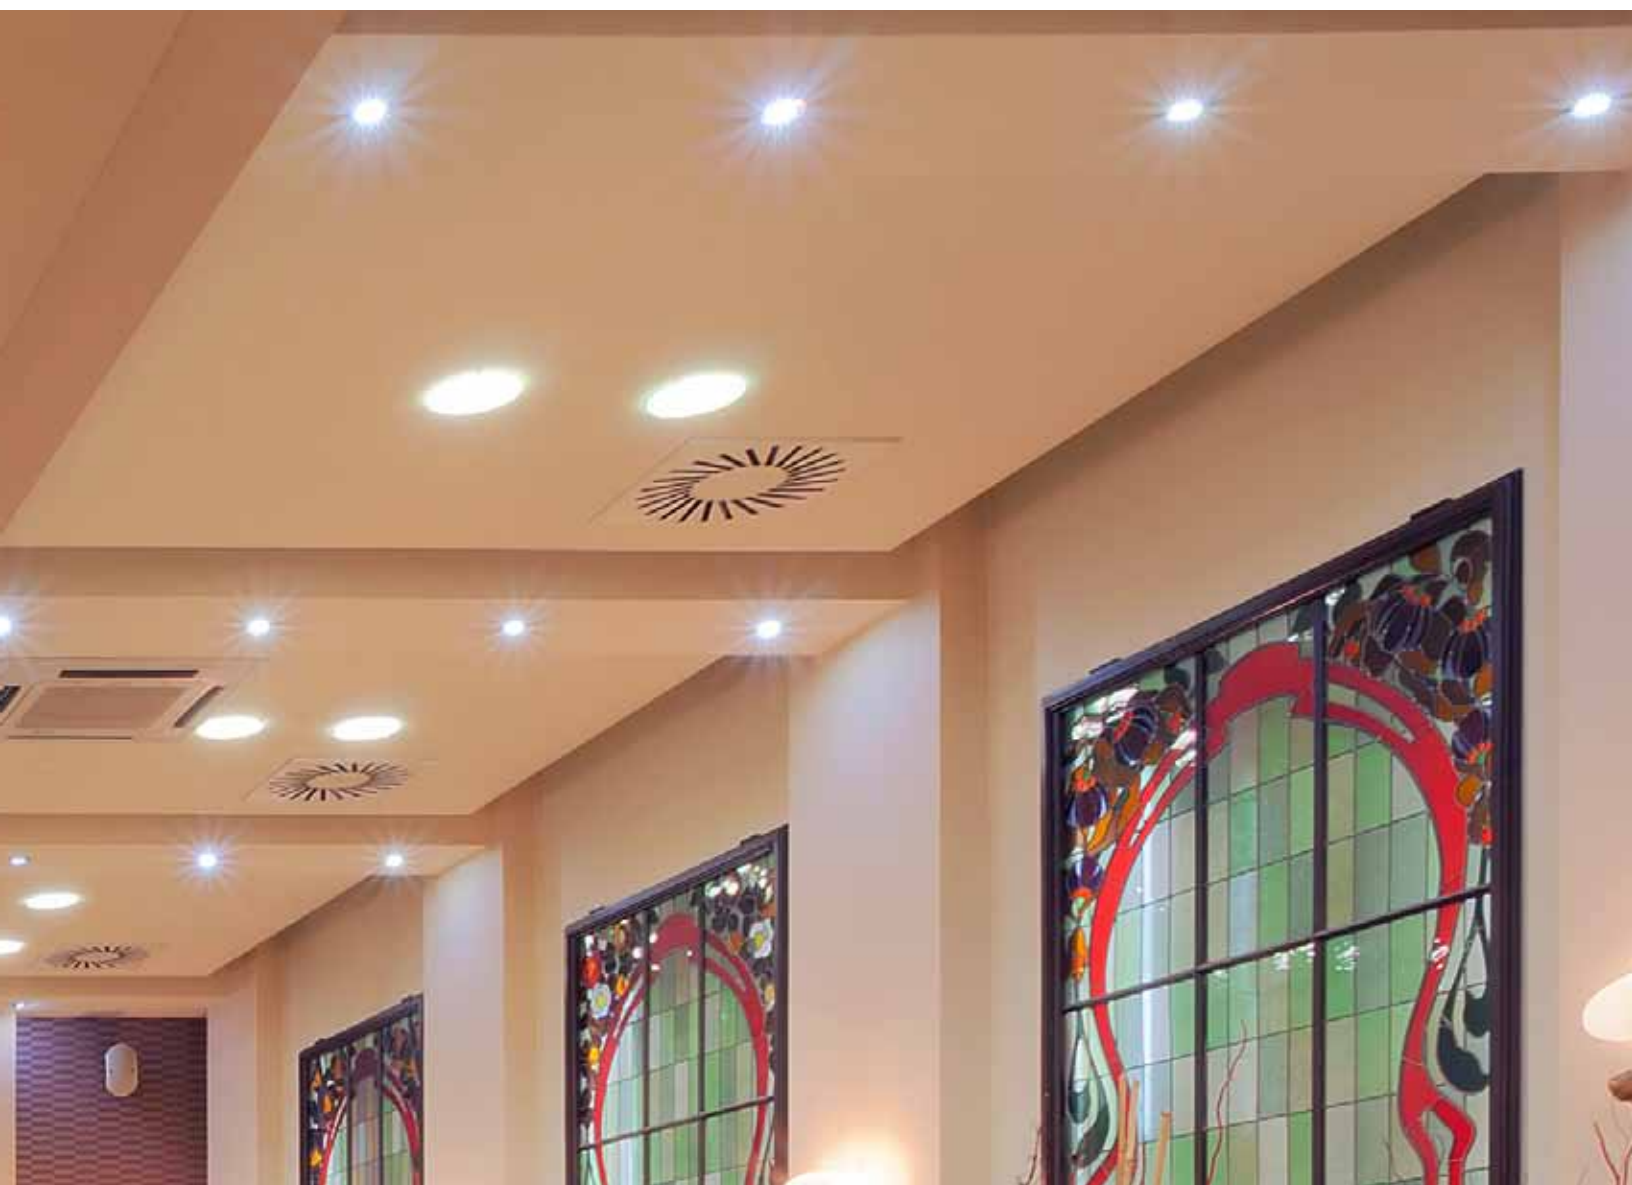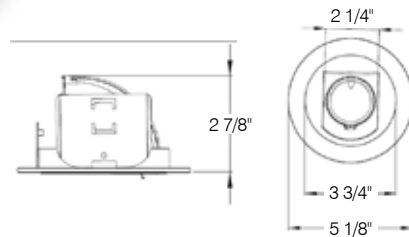



COMPACT FLUORESCESCENT EMERGENCY & DIMMING BALLAST



6" Compact Fluorescent Emergency Ballast Recessed Can

New Construction 1 X 26W Vertical Mount with 120-277V HPF Electronic Ballast and 90 Minute Standby Capacity

RH6/NC/126/IC/AT/EM

PRODUCT SPECIFICATIONS

HOUSING



New Construction, Insulation Contact and Airtight Applications. Completely assembled and wired with Test Switch and Charge Light with white trim plate.

BATTERY

Ni-Cad standby battery will power 1x26W lamp for 90 minutes.

ELECTRONIC BALLAST

Thermally protected

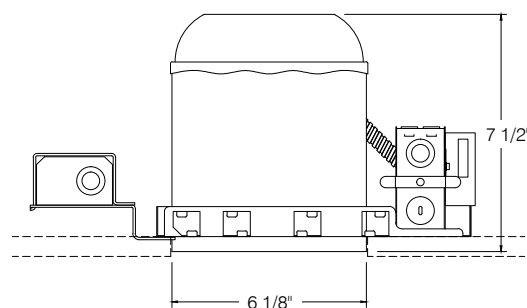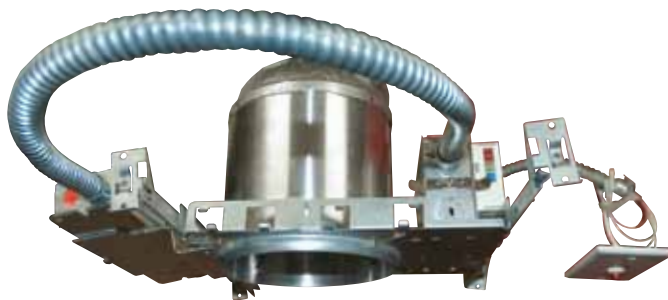


INSTALLATION

BAR HANGER

90° Adjustable telescoping bar hangers (13 5/8" - 24") with quick install end flanges.

JUNCTION BOX

Listed for through branch circuit wiring. Contains seven 1/2" knockouts and four Romex pryouts with strain relief.

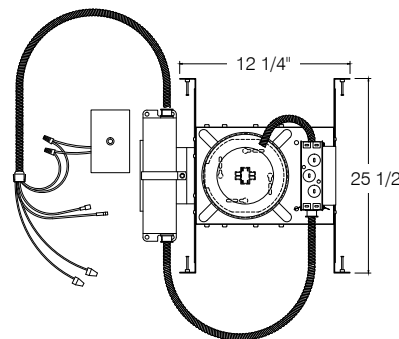

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Certified under ASTM-E283 for Airtight construction



TRIMS

For a complete listing of 6" Vertical trims please see pages 58, 59, 60 & 61.

ORDERING INFORMATION

Code: 78213

Item # RH6/NC/126/IC/AT/EM

Topaz offers numerous lamp options.

Consult your sales rep.

8" Compact Fluorescent Emergency Ballast Recessed Can

New Construction 2 X 26W Horizontal Mount with 120-277V HPF Electronic Ballast and 90 Minute Standby Capacity

S226H/EM

PRODUCT SPECIFICATIONS

HOUSING



New Construction, Non-IC applications. Completely assembled and wired with Test Switch and Charge Light on separate junction box with white trim plate.

BATTERY

Ni-Cad standby battery will power 1x13-42W lamp or 2x13-26W lamps for 90 minutes.

ELECTRONIC BALLAST

Thermally protected

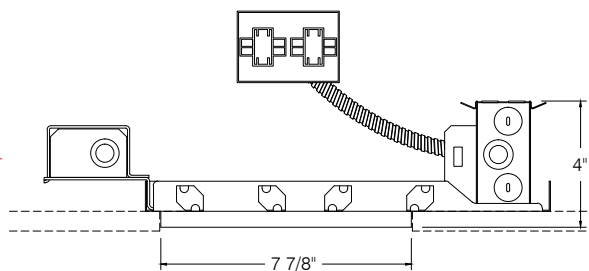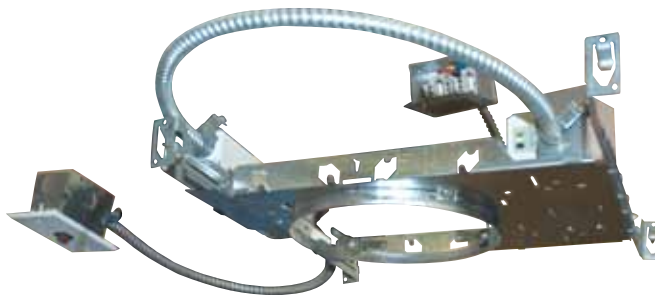


INSTALLATION

BAR HANGER

90° Adjustable telescoping bar hangers (13 5/8" - 24") with quick install end flanges.

JUNCTION BOX

Listed for through branch circuit wiring. Contains five 1/2" KO's and two combination 1/2" and 3/4" KO's with ROMEX® pry-outs and strain reliefs.

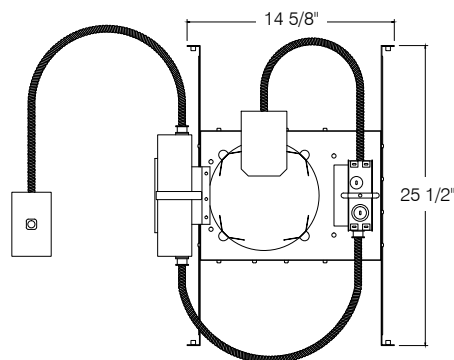

LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 75984

Item # S226H/EM

Topaz offers numerous lamp options.

Consult your sales rep.

8" Dimmable Compact Fluorescent Recessed Can

New Construction 2 X 26W Vertical Mount with 120-277V HPF Electronic Ballast

S226H/DIM

PRODUCT SPECIFICATIONS

HOUSING

New Construction, Non-IC applications.
Heavy gauge die-formed steel housing.

LAMP


Two 26W quad or triple tube compact fluorescent
lamp G(X)24q-3 lamp holders. 4 pin electronic.

HPF ELECTRONIC DIMMING BALLAST

120V thru 277 HPF Electronic with Universal Super Dim
Ballast with end-of-life lamp protection.

REFLECTOR

Aluminum reflector with clear specular finish.
Other finishes available on special order basis.

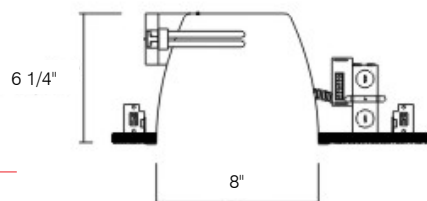


INSTALLATION

BAR HANGER

90° Adjustable telescoping bar hangers (13 5/8" - 24")
with pre-installed nails.

JUNCTION BOX

Pre-wired junction box with 7/8" KO's and four
KO's with ROMEX® pry-outs and strain reliefs.




LABELS AND LISTINGS

UL Listed for Damp Location

UL Listed for Feed Through wiring

Energy Star Qualified

Meets TITLE 24 High Efficacy Requirements



ORDERING INFORMATION

Code: 71971

Item # S226H/DIM

Topaz offers numerous lamp options.

Consult your sales rep.


8" Compact Fluorescent Emergency & Dimming Ballast Recessed Trims



RT830CL/WH

8" Clear Reflector with White Ring
Uses 2 x 26W Quad Tube Lamps

Order Code: 71909




RT833WH

8" Fresnel Glass Lens with White Baffle
and White Ring

Uses 2 x 26W Quad Tube Lamps

Order Code: 78087




RT832CL/WH

8" Clear Reflector with White Baffle
and White Ring

Uses 2 x 26W Quad Tube Lamps

Order Code: 78086




RT834CL/WH

8" Louvered Reflector with White Ring

Uses 2 x 26W Quad Tube Lamps

Order Code: 71917





ACCESSORIES



Accessories



RFA-ADPT-E26-E26
Ceramic Extension Socket (E26-E26)
Order Code: 78230



RFA-GSKT-6
Trim Gasket
Order Code: N/A



RFA-ADPT-E26-E26-PH
Phenolic Extension Socket (E26-E26)
Order Code: 78231



RFA-HB
1 Set Male-Female Hanger Bar
Order Code: 75099



RFA-ADPT-E26-GU24
Socket Adapter (E26-GU24)
Order Code: 78228



RFA-LV-XFMR-50
120V to 12VAC/50W
Magnetic Replacement Transformer
Mounted on J-Box Cover
(For use with recessed cans TL601
& TL602)
Order Code: 77530




RFA-CLIP
Universal Remodel Clips (Set)
Order Code: 78218



RFA-LV-XFMR-50/220-EL
220V to 12VAC/50W
Electronic Replacement Transformer
(Not for use with recessed cans)
Order Code: 78227



RFA-GC
Glass Cover for Louver Trim
Order Code: RFA-GC

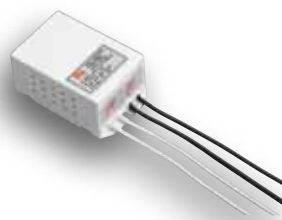


RFA-LV-XFMR-50-EL
120V to 12VAC/50W
Electronic Replacement Transformer
(Not for use with recessed cans)
Order Code: 78225

Accessories



RFA-LV-XFMR-75-EL
120V to 12VAC/75W
Electronic Replacement Transformer
(Not for use with recessed cans)
Order Code: 78226




RFA-SPR-COIL
Coil Spring
Order Code: 74101



RFA-SKT-GU10
GU10 Socket
Order Code: 78219



RFA-TR-OV6-BL
8 1/2" Black Ring
Order Code: 78221



RFA-SKT-GU5.3
MR16 Socket with Heat Shield
Order Code: 72110



RFA-TR-OV6-BR
8 1/2" Brass Ring
Order Code: 78223




RFA-SKT-TP-E26
Base Plate with Removable Socket
Order Code: 78215



RFA-TR-OV6-C
8 1/2" Chrome Ring
Order Code: 78222



RFA-SPR-V
Torsion Spring
Order Code: 78217

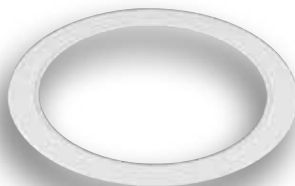

RFA-TR-OV6-W
8 1/2" White Ring
Order Code: 78220



INDEX



Index

Catalog #	Page	Catalog #	Page
ARHF/6/1X2642/BH	25	RFA-LV-XFMR-75-EL	145
ARHF/6/2X26/BH	26	RFA-SKT-GU10	145
ARHF/8/1X2642/Fl	31	RFA-SKT-GU5.3	145
ARHF/8/2X26/Fl	32	RFA-SKT-TP-E26	145
ARHF/8/2X2642/Fl	33	RFA-SPR-COIL	145
ARVF/4/1X18/BH	18	RFA-SPR-V	145
ARVF/4/1X26/BH	19	RFA-TR-OV6-BL	145
ARVF/4/1X2642/BH	20	RFA-TR-OV6-BR	145
ARVF/6/1X2642/BH	22	RFA-TR-OV6-C	145
ARVF/6/1X2642/Fl	23	RFA-TR-OV6-W	145
ARVF/8/1X2642/BH	28	RH3/NLV	122
ARVF/8/1X2642/Fl	29	RH3/NLV/IC/AT	123
ATH600/C	27	RH3/RLV/AT	124
ATH601/W	27	RH4/N	76
ATH604/C	27	RH4/N/IC/AT	77
ATH614/C	27	RH4/NC/126/IC/AT	38
ATH614/W	27	RH4/NC/126/IC/AT/H	39
ATH621/C	27	RH4/NG	112
ATH800/C	34	RH4/NG/118/IC/AT	64
ATH804/C	34	RH4/NG/IC/AT	111
ATH814/C	34	RH4/NLED/IC/AT	10
ATH814/W	34	RH4/NLV	126
ATH860/W	34	RH4/NLV/HW	127
ATV400/C	21	RH4/NLV/IC/AT	128
ATV401/W	21	RH4/R/AT	78
ATV600/C	24	RH4/RC/126/IC/AT	40
ATV601/W	24	RH4/RC/126/IC/AT/H	41
ATV604/C	24	RH4/RG	114
ATV614/C	24	RH4/RG/118/IC/AT	65
ATV614/W	24	RH4/RLED/IC/AT	11
ATV800/C	30	RH4/RLV	129
ATV814/C	30	RH4/RLV/HW	130
ATV814/W	30	RH5/N/IC/AT	81
ATV860/W	30	RH5/NC/118/IC/AT	43
RFA-ADPT-E26-E26	144	RH5/NC/126/IC/AT	44
RFA-ADPT-E26-E26-PH	144	RH5/NC/126/IC/AT/H	45
RFA-ADPT-E26-GU24	144	RH5/NG/126/IC/AT	67
RFA-CLIP	144	RH5/R	82
RFA-GC	144	RH5/R/IC/AT	83
RFA-GSKT-6	144	RH5/RC/126/IC/AT	46
RFA-HB	144	RH5/RC/126/IC/AT/H	47
RFA-LV-XFMR-50	144	RH5/RG/126/IC/AT	68
RFA-LV-XFMR-50/220-EL	144	RH6/N/IC	85
RFA-LV-XFMR-50-EL	144	RH6/N/IC/AT	86

Index

Catalog #	Page	Catalog #	Page
RH6/N/S.....	89	RT401BL/WH.....	79
RH6/N/S/IC.....	90	RT401BL/WH/LV.....	115, 131
RH6/N/S/IC/AT.....	91	RT401SCH/LV.....	116, 132
RH6/NC/118/IC/AT.....	49	RT401WH.....	79
RH6/NC/126/IC/AT.....	50	RT401WH/LV.....	116, 132
RH6/NC/126/IC/AT/EM.....	138	RT403BL.....	79
RH6/NC/126/IC/AT/FL.....	52	RT403WH.....	80
RH6/NC/126/IC/AT/H.....	51	RT406BL.....	80
RH6/NC/12642/IC/AT/H.....	53	RT406WH.....	80
RH6/NC/12642/IC/ATHD.....	54	RT406WH/LV.....	116, 132
RH6/NLED/IC/AT.....	13	RT407WH.....	80
RH6/NG/126/IC/AT.....	70	RT407WH/LV.....	116, 132
RH6/NSL/IC.....	104	RT408BL/LV.....	116, 132
RH6/NSL/IC/AT.....	105	RT408WH/LV.....	116, 132
RH6/NSL/IC/BOX.....	106	RT409WH/A.....	80
RH6/R/IC.....	92	RT409WH/DO/LV.....	116, 132
RH6/R/IC/AT.....	93	RT409WH/FL.....	80
RH6/R/S.....	94	RT409WH/FL/LV.....	117, 133
RH6/R/S/IC.....	95	RT410CL/WH/C.....	42
RH6/R/S/IC/AT.....	96	RT410CL/WH/G.....	66
RH6/RC/126/IC/AT.....	56	RT411CL/WH/C.....	42
RH6/RC/126/IC/AT/H.....	57	RT412WH/C.....	42
RH6/RG/126/IC/AT.....	71	RT412WH/G.....	66
RH6/RLED/IC/AT.....	14	RT413BL/BL/LV.....	117, 133
RH6/RSL/IC.....	107	RT413WH/LV.....	117, 133
RH6/RSL/IC/AT.....	108	RT418BL/WH/LV.....	117, 133
RH6H/N/C/226.....	55	RT418WH/LV.....	117, 133
RT300CL/WH.....	125	RT419WH/A/C.....	42
RT301BL/WH.....	125	RT419WH/FL/C.....	42
RT301WH.....	125	RT419WH/FR/C.....	42
RT332WH.....	125	RT421WH.....	80
RT400BL/WH.....	79	RT421WH/LV.....	117, 133
RT400BL/WH/LV.....	115, 131	RT422CH/LV.....	117, 133
RT400CL/CH/LV.....	115, 131	RT422NK/LV.....	117, 133
RT400CL/NK/LV.....	115, 131	RT422WH/LV.....	118, 134
RT400CL/WH.....	79	RT429WH.....	80
RT400CL/WH/LV.....	115, 131	RT431BL/LV.....	118, 134
RT400GO/WH.....	79	RT431BL/WH/LV.....	118, 134
RT400GO/WH/LV.....	115, 131	RT431WH/LV.....	118, 134
RT400WH.....	79	RT432NK/LV.....	118, 134
RT400WH/LV.....	115, 131	RT432WH/LV.....	118, 134
RT401BL.....	79	RT436BL/LV.....	118, 134
RT401BL/LV.....	115, 131	RT436NK/LV.....	118, 134
RT401BL/SCH/LV.....	116, 132	RT436SCH/LV.....	119, 135

Index

Catalog #	Page
RT436WH/LV	119, 135
RT500CL/WH	84
RT501WH	84
RT502WH	84
RT502WH/AT	84
RT503WH	84
RT509WH/A	84
RT509WH/FL	84
RT510CL/WH	48, 69
RT511CL/WH	48, 69
RT512WH/C	48, 69
RT519WH/A	48, 69
RT519WH/FL	48, 69
RT519WH/FR	48, 69
RT600CL/CH/R30	97
RT600CL/WH	58, 72
RT600CL/WH/R30	97
RT600CL/WH/R40	97
RT600CL/WH/SC	109
RT600GO/WH/R30	97
RT600WH	58, 72
RT600WH/R30	97
RT600WH/R40	97
RT601BL	58, 72, 97
RT601BL/WH	58, 72, 97
RT601SCH	58, 72, 98
RT601WH	58, 72, 98
RT602BL	98
RT602BL/WH	98
RT602BL/WH/AT	98
RT602BL/WH/SC	109
RT602GW/AT	58, 98
RT602GW/AT/FS	58, 98
RT602SCH	98
RT602WH	99
RT602WH/AT	59, 99
RT602WH/SC	109
RT603BL	99
RT603WH	99
RT603WH/WH/SC	109
RT604BL	99
RT604BL/WH/SC	109
RT604SCH	99
RT604WH	99
RT604WH/SC	109

Catalog #	Page
RT605WH	99
RT606BL/R30	100
RT606BL/R40	100
RT606CH/R30	100
RT606CH/R40	100
RT606WH/R30	100
RT606WH/R40	100
RT609WH/A	59, 72, 100
RT609WH/A/P	59, 72, 100
RT609WH/DO	101
RT609WH/DO/P	59, 72, 101
RT609WH/FL	59, 73, 101
RT609WH/FL/P	59, 73, 101
RT609WH/FR/P	59, 72, 101
RT610CL/WH	59, 73, 101
RT610GO/WH	101
RT610WH	101
RT611BL/WH	60, 73, 102
RT611WH	60, 73, 102
RT612WH	60, 73, 102
RT613BL/WH	102
RT613WH	102
RT613WH/R	102
RT614C	60, 73, 102
RT614GW	60, 73, 102
RT615C/AT	60
RT615GW/AT	60
RT616WH	103
RT616WH/R40	103
RT619WH/A/P	60, 73, 103
RT620WH	61, 73, 103
RT621BL/WH	103
RT621WH	61, 73, 103
RT830CL/WH	141
RT832CL/WH	141
RT833WH	141
RT834CL/WH	141
RTLED/RETRO/4/D	8
RTLED/RETRO/6/D	9
RTL/RF/433WH/WH/D	12
RTL/RF/443WH/WH/D	12
RTL/RF/633WH/WH/D	15
RTL/RF/643WH/WH/D	15
S226H/EM	139
S226H/DIM	140

Cross Reference

DESCRIPTION	NEXTWAVE	HALO	JUNO	LIGHTOLIER	CAPRI	PROGRESS
6" LINE VOLTAGE CANS						
Universal IC/NON-IC New Construction	RH6/N/IC	H7ICT	IC22	1104 ICQ	R10IC	P87
Universal IC/NON-IC Remodel Construction	RH6/R/IC	H7RICT	IC22R	1104 ICR	RR10IC	P187
Universal IC/NON-IC Shallow New Construction	RH6/N/S/IC	H27ICT	IC21	1104 SIC	R9	P86
Universal IC/NON-IC Shallow Remodel Construction	RH6/R/S/IC	H27RICT	IC21R	1104 SICR	RR9	P186
6" LINE VOLTAGE TRIMS						
BR30 PAR30 Stepped Baffle	RT601	310	24	2005	RM30	P8075
BR40 PAR38 Stepped Baffle	RT602	410	25	2076	RM40	P8066
BR30 PAR30 Eyeball	RT603	78	229	2082	R18	P8077
BR30 PAR30 Open	RT604	301	250	2007	R30	P8072
BR40 PAR38 Open	RT605	401	251	2071	----	----
BR30 PAR30 Reflector	RT600/R30	426	27	2008	RC30	P8068
BR40 PAR38 Reflector	RT600/R40	427	26	2010	RMS40	P8068
40, 60 A19 Dropped Opal	RT609/D	71	241	2078	R16	P8009
A19 Albalite Glass Lens	RT609/A	70	20	2128	SH12IC	P8060
A19 Wall Washer	RT620	303	261	2085	RB45	P8052
BR40 PAR38 Deep Reflector	RT610	404	----	2445	----	----
BR40 PAR38 Deep Stepped Baffle	RT611	409	230	2449	----	----
A19 Fresnel Glass Lens	RT609/FR	73	22	2171	R13	P8011
BR30 PAR30 Stepped Eyeball	RT613	417	229	2122	----	P8079
BR30 PAR30 Regressed Eyeball	RT613	418	248	----	RM38	P8078
BR40 Wall Washer	RT621	423	261	----	R25	P8052
5" LINE VOLTAGE CANS						
Non-IC Remodel Construction (75W)	RH5/R	H5RT	TC20R	1004 ICR	CR5	P185
Non-IC New Construction (75W)	RH5/N	H5T	TC20	1004 IC	CRR5	P85
5" LINE VOLTAGE TRIMS						
BR30 PAR30 Step Baffle	RT502	5010	205	1005	R238	P8175
BR30 PAR30 Reflector	RT500	5020	207	1008	R130	P8172
4" LINE VOLTAGE CANS						
PAR20 Remodel Construction	RH4/R	H99RT	TC 1	2003R	RR4	P832
PAR20 New Construction	RH4/N	H99T	TCIR	2002 P1	R4	P830
4" LINE VOLTAGE TRIMS						
BR20 PAR20 Step Baffle	RT401	993	14	2076	R401	P8044
BR20 PAR20 Reflector	RT400	999	17	2045	R402	P8043
BR20 PAR20 Eyeball	RT403	998	19	2082	R408	P8046
BR20 PAR20 Wall Wash	RT415	992	16	2035	----	P8047
BR20 PAR20 Pin Hole	RT407	990	13	2011	----	P8042
6" LINE VOLTAGE CANS FOR SLOPED CEILINGS						
IC Direct New Construction	RH6/NSL	----	TC926	----	VS6	P645
IC Direct Remodel Construction	RH6/RS�	----	TC926R	----	CS6R	P745
6" LINE VOLTAGE TRIMS FOR SLOPED CEILINGS						
Step	RT602/SC	498	614	----	VS630	P8004
Eyeball	RT603/SC	78	619	----	S18	----
Step Eyeball	RT604/SC	417	----	----	----	----
Reflector	RT600/SC	----	612	----	VS640	----
4" LOW VOLTAGE (12V) CANS						
Non-IC Remodel Construction	RH4/RLV	H1499RT	TC44R	2000LVR	LVERTX	P818
Non-IC New Construction	RH4/NLV	H1499T	TC44	2000LV	LV 1 EX	P816
4" LOW VOLTAGE (12V) TRIMS						
Step Baffle	RT401	1493	444	2005	LC121	P8037
Reflector	RT400	1421	447	2013	LC122	P8056
Slot Aperture	RT408	1420	445	2006	LC119	P8039
Deep Baffle with Eyeball	RT413	1498	448	2022LV	LC108	P8057
Wall Wash	RT421	----	446	----	----	P8045
Gimbal	RT406	1495	----	----	----	----

Topaz/Nextwave Cross Reference

Topaz Part #	Nextwave Part #	Topaz Part #	Nextwave Part #
501BL/BL	RT601BL	529WH	RT606WH/R40
501BL/WH	RT601BL/WH	530CL/WH	RT830CL/WH
501SCH	RT601SCH	532CL/WH	RT832CL/WH
501WH/WH	RT601WH	533WH/WH	RT833WH
502BL/BL	RT602BL	534CL/WH	RT834CL/WH
502BL/WH	RT602BL/WH	543WH	RT609WH/DO/P
502GW/GW/AT	RT602GW/AT	550WH	RT616WH
502GW/GW/AT/FS	RT602GW/AT/FS	560CL	RT600CL/WH/C
502SCH	RT602SCH	560WH	RT600WH/C
502WH/WH	RT602WH	602WH/WH	RT502WH
502WH/WH/AT	RT602WH/AT	602WH/WH/R	RT512WH/C
503WH	RT603WH	603WH/WH	RT501WH
504SCH	RT604SCH	606CL/WH	RT500CL/WH
504WH	RT604WH	613WH	RT509WH/FL
504WH/NB	RT604WH/NB	613WH/A	RT509WH/A
505PB	RT605PB	614WH/A	RT519WH/A
505WH	RT605WH	614WH/F	RT519WH/FR
506CL/CH	RT600CL/CH/R30	614WH/R	RT519WH/FL
506CL/WH	RT600CL/WH/R30	616CL/WH/R	RT511CL/WH
506CL/WH/AT	RT600CL/WH/R30/AT	702BL/WH	RT602BL/WH/SC
506GO/PB	RT600GO/PB/R30	702WH/WH	RT602WH/SC
506GO/WH	RT600GO/WH/R30	704WH/WH	RT604WH/SC
506WH/WH	RT600WH/R30	705CL/WH	RT600CL/WH/SC
507CL/WH	RT600CL/WH/R40	ICR3	RH6/R/IC
507WH/WH	RT600WH/R40	ICR3/5"	RH6/R/S/IC
509WH	RT609WH/A	ICR3/AT	RH6/R/IC/AT
509WH/F	RT609WH/FR/P	ICR3/SLOPE	RH6/RSL/IC
509WH/P	RT609WH/A/P	ICRC118AT/GU24/V4	RH4/RG/118/IC/AT
510WH	RT620WH	ICRC126AT/GU24/V6	RH6/RG/126/IC/AT
511CL/WH	RT610CL/WH	ICRC126AT/V4	RH4/RC/126/IC/AT
511GO/WH	RT610GO/WH	ICRC126AT/V4/HU	RH4/RC/126/IC/AT/H
511WH/WH	RT610WH	ICRC126AT/V5	RH5/RC/126/IC/AT
512BL/WH	RT611BL/WH	ICRC126AT/V5/HU	RH5/RC/126/IC/AT/H
512WH/WH	RT611WH	ICRC126AT/V6	RH6/RC/126/IC/AT
513WH	RT609WH/FL	ICRC126AT/V6/HU	RH6/RC/126/IC/AT/H
513WH/P	RT609WH/FL/P	ICRLED10/AT/4	RH4/RLED/10/IC/AT
514WH/WH	RT613WH	ICRLED16/AT/6	RH6/RLED/16/IC/AT
515WH/WH	RT613WH/R	ICS/AT/FL	RH6/N/IC/AT/FL
516BL/WH	RT621BL/WH	ICS2	RH6/N/IC
516WH/WH	RT621WH	ICS2/5"	RH6/N/S/IC
518WH	RT612WH	ICS2/AT	RH6/N/IC/AT
519WH/P/R	RT619WH/A/P	ICS2/AT/SLOPE	RH6/NSL/IC/AT
522WH	RT606WH/R30	ICS2/SLOPE	RH6/NSL/IC
526BL/WH	RT626BL/FL/C	ICS2/SLOPE BOX	RH6/NSL/IC/BOX
526WH/WH	RT626WH/FL/C	ICS2/SUPERSLOPE	RH6/NSSL/IC
526WH/WH/F	RT626WH/FR/C	ICSC118AT/GU24/V4	RH4/NG/118/IC/AT

Topaz/Nextwave Cross Reference

Topaz Part #	Nextwave Part #	Topaz Part #	Nextwave Part #
ICSC118AT/V5.....	RH5/NC/118/IC/AT	TR612CL/WH.....	RT400CL/WH/LV
ICSC118AT/V6.....	RH6/NC/118/IC/AT	TR612GO/PB.....	RT400GO/PB/LV
ICSC12642AT/SW/V6.....	RH6/NC/12642/IC/ATHD	TR612WH/WH.....	RT400WH/LV
ICSC12642AT/V6.....	RH6/NC/12642/IC/AT/H	TR613BL.....	RT408BL/LV
ICSC126AT/FL/V6.....	RH6/NC/126/IC/AT/FL	TR613WH.....	RT408WH/LV
ICSC126AT/GU24/V6.....	RH6/NG/126/IC/AT	TR614BL/WH.....	RT413BL/WH/LV
ICSC126AT/V4.....	RH4/NC/126/IC/AT	TR614WH/WH.....	RT413WH/LV
ICSC126AT/V5.....	RH5/NC/126/IC/AT	TR615WH/WH.....	RT421WH/LV
ICSC126AT/V5/HU.....	RH5/NC/126/IC/AT/H	TR617BL/NK.....	RT406BL/NK/LV
ICSC126AT/V6.....	RH6/NC/126/IC/AT	TR617WH/WH.....	RT406WH/LV
ICSC126AT/V6/EM.....	RH6/NC/126/IC/AT/EM	TR622CH.....	RT422CH/LV
ICSC126AT/V6/HU.....	RH6/NC/126/IC/AT/H	TR622NK.....	RT422NK/LV
ICSLED10/AT/4.....	RH4/NLED/10/IC/AT	TR622WH.....	RT422WH/LV
ICSLED16/AT/6.....	RH6/NLED/16/IC/AT	TR626WH/WH.....	RT426WH/LV
R3/5".....	RH6/R/S	TR629WH/WH.....	RT429WH/LV
S2/5".....	RH6/N/S	TR632NK.....	RT432NK/LV
TL301/AT.....	RH3/RLV/AT	TR632WH.....	RT432WH/LV
TL302.....	RH3/NLV	TR633CH.....	RT433CH/LV
TL302/IC/AT.....	RH3/NLV/IC/AT	TR636WH.....	RT436WH/LV
TL501.....	RH5/R	TR642WH.....	RT409WH/FL/LV
TL501/IC/AT.....	RH5/R/IC/AT	TR643WH.....	RT409WH/DO/LV
TL502/IC/AT.....	RH5/N/IC/AT	TR811BL/BL.....	RT401BL
TL601.....	RH4/RLV	TR811BL/WH.....	RT401BL/WH
TL602.....	RH4/NLV	TR811WH/PB.....	RT401WH/PB
TL602/IC/AT.....	RH4/NLV/IC/AT	TR811WH/WH.....	RT401WH
TL603.....	RH4/NLV/HW	TR812BL/WH.....	RT400BL/WH
TL604.....	RH4/RLV/HW	TR812CL/WH.....	RT400CL/WH
TL807.....	RH4/R	TR812GO/WH.....	RT400GO/WH
TL807GU10.....	RH4/RG	TR812WH/WH.....	RT400WH
TL809.....	RH4/N	TR813WH.....	RT409WH/FL
TL809/GU10/IC.....	RH4/NG/IC	TR813WH/A.....	RT409WH/A
TL809/IC.....	RH4/N/IC	TR814BL.....	RT403BL
TL809/IC/AT.....	RH4/N/IC/AT	TR814PB.....	RT403PB
TL809GU10.....	RH4/NG	TR814WH.....	RT403WH
TR311BL/WH.....	RT301BL/WH	TR815WH/WH.....	RT421WH
TR311WH/WH.....	RT301WH	TR818WH.....	RT407WH
TR312CL/WH.....	RT300CL/WH	TR828BL.....	RT406BL
TR332WH.....	RT332WH	TR828WH.....	RT406WH
TR611BL/BL.....	RT401BL/LV	TR829WH.....	RT429WH
TR611BL/NK.....	RT401BL/NK/LV	TR830W.....	RT412WH/C
TR611BL/WH.....	RT401BL/WH/LV	TR831CL.....	RT410CL/WH/C
TR611SCH.....	RT401SCH/LV	TR832W.....	RT419WH/A/C
TR611WH/WH.....	RT401WH/LV	TR834CL/WH.....	RT411CL/WH/C
TR612CL/CH.....	RT400CL/CH/LV	TR836.....	RT419WH/FR/C
TR612CL/NK.....	RT400CL/NK/LV	TR838W.....	RT419WH/FL/C
		TR840GU/DWB.....	RT412WH/G
		TR841GU/DCR.....	RT400CL/WH/G

Nomenclature

CANS

Series	Aperture Size	Lamp Orientation	Construction	Lamp Style	# of Lamps	Lamp Wattage	Insulation Contact	Airtight	Voltage	Options
RH= Recessed Housing	3	Blank=Vert	Blank=Standard Depth Can	Blank=Incand.	1 or 2	Blank=Incand. Insert wattages for CFL, GU and LED	Blank=Non-IC IC=IC	Blank=Non-AT AT=AT	Blank=120 H=120/277 HW=High Wattage	Any Modifications
	4	H=Hor	R=Remodel	C=CFL						
	5		N=New	G=GU						
	6		S=Shallow SL=Slope SSL=Super Slope	LED=LED LV=Low Voltage						

TRIMS

Series	Aperture Size	2X #	Trim Color	Ring Color	Lamp Type/ Wattage	Airtight	Options
RT= Recessed Trim	3	See Below	WH = White	Blank=Same color as trim	Blank = Incandescent C=CFL G=GU LED=LED LV=Low Voltage	Blank = Non-AT or insert 'AT'	Used for trims with both Plastic and Metal Rings, Different Lensing, Etc
	4		BL=Black	WH = White			
	5		CH=Chrome	BL=Black			
	6		NK=Satin Nickel CL=Clear GO=Gold	CH=Chrome NK=Satin Nickel			

Trim Numbering System

00 = Smooth Reflector	04 = Open Ring	08 = Slot	12 = Deep Baffle	16 = Deep Gimbal	20 = Wall Wash
01 = Baffle	05 = Open Ring	09 = Shower	13 = Baffle Eyeball	17 = Shallow Baffle	21 = Baffle Wall Wash
02 = Baffle	06 = Gimbal	10 = Deep Smooth Reflector	14 = OPEN	18 = OPEN	
03 = Eyeball	07 = Pin Hole	11 = Deep Reflector w/Baffle	15 = OPEN	19 = Deep Shower	



Terms & Conditions and Warranty

TERMS

Net 30 days.

All orders are accepted subject to credit approval.

MINIMUM CHARGE: Due to the cost of processing small orders a minimum charge of \$100.00 will be applied for each invoice regardless of the dollar value.

FREIGHT: All product is sold F.O.B. factory. Full freight allowed on shipments invoiced at \$1,200.00 within the continental United States. To Alaska and Hawaii freight is allowed to the West Coast. If meeting export minimums, freight will be prepaid to port of exit. All prepaid shipments will be routed by NEXTWAVE™.

NEXTWAVE™ will not be responsible for any loss or damage which might occur during shipment. Buyer is responsible once freight is delivered to the first carrier.

TAXES: Liability for all taxes, excise tax, duties, revenues, imports, licenses, or other fees imposed upon products, sale shipment, or use of the company's products shall be assumed and paid for by the buyer, and buyer shall indemnify NEXTWAVE™ against any such liability.

PRICES: All prices are subject to change without notice. Orders shall be invoiced at prices in effect at time of shipment. Written quotations will be protected for 90 days from day of quote.

CLAIMS: All claims for shortages or defects must be made to NEXTWAVE™ within 48 hours from receipt of merchandise.

CANCELLATIONS AND RETURNS: Orders may not be cancelled without prior written consent of NEXTWAVE™. Returning product for credit is permitted only if an R.G.A. (return goods authorization) is issued by NEXTWAVE™. All freight charges will be borne by buyer and a restocking fee of 25 pct will be charged. All items returned must be in sellable condition or credit will not be given. All RGA requests must be made within 45 days of original ship date.

WARRANTY

All NEXTWAVE™ recessed lighting fixtures and trims are warranted for three (3) full years from the date of wholesale purchase.

This warranty covers only properly installed NEXTWAVE™ recessed lighting fixtures and trims used under normal conditions specified in the product descriptions.

For the warranty period NEXTWAVE™ will, at its option, repair or replace without charge a defective fixture or trim. It may be necessary to return the fixture or trim to NEXTWAVE™ transportation prepaid for NEXTWAVE™ to inspect and to determine the validity of the claim. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other consequential charges, nor does it apply to any equipment of another manufacturer used in conjunction with the NEXTWAVE™ recessed lighting fixtures and trims.

The information within this catalog is believed to be accurate at the time of printing. Dimensions and specifications are subject to change without notice. NEXTWAVE™ does not accept or assume responsibility for typographical errors, changes, omissions or for harm resulting there from.

 Underwriters Laboratories, Inc.	NEXTWAVE™ products are manufactured for NEC Installation on Listed Raceways.	 Canadian Standards Association
Product listed by Underwriters Laboratories and certified by the Canadian Standards Association are indicated accordingly.		
 NMC NATIONAL MANUFACTURERS COUNCIL	Member:  NAED ASSOCIATE	 NFA National Fire Protection Association
Uniform Code Council (UCC) manufacturer number=751338. This prefix in conjunction with the 5 digit number listed for each item throughout the catalog provides the complete Universal Product Code (UPC) number.		



Nextwave™ Recessed Downlighting

888.771.2852

www.nextwave-usa.com

Corporate Headquarters:

925 Waverly Avenue

Holtsville, NY 11742

800.666.2852

Fax: 631.758.8026

225 Parkside Drive

San Fernando, CA 91340

888.551.2852 or 818.838.3123

Fax: 888.690.2852 or 818.838.3102

2020 West 26th Street, Suite C

Jacksonville, FL 32209

800.338.2852

Fax: 772.778.5386

Printed in the USA. 2013.

Product specifications are subject to change without notice.

PM-NW-CAT-112013-V1.0

\$5.00

