


## xx-HASP- xx Horizontal Adjustable Splice KIT

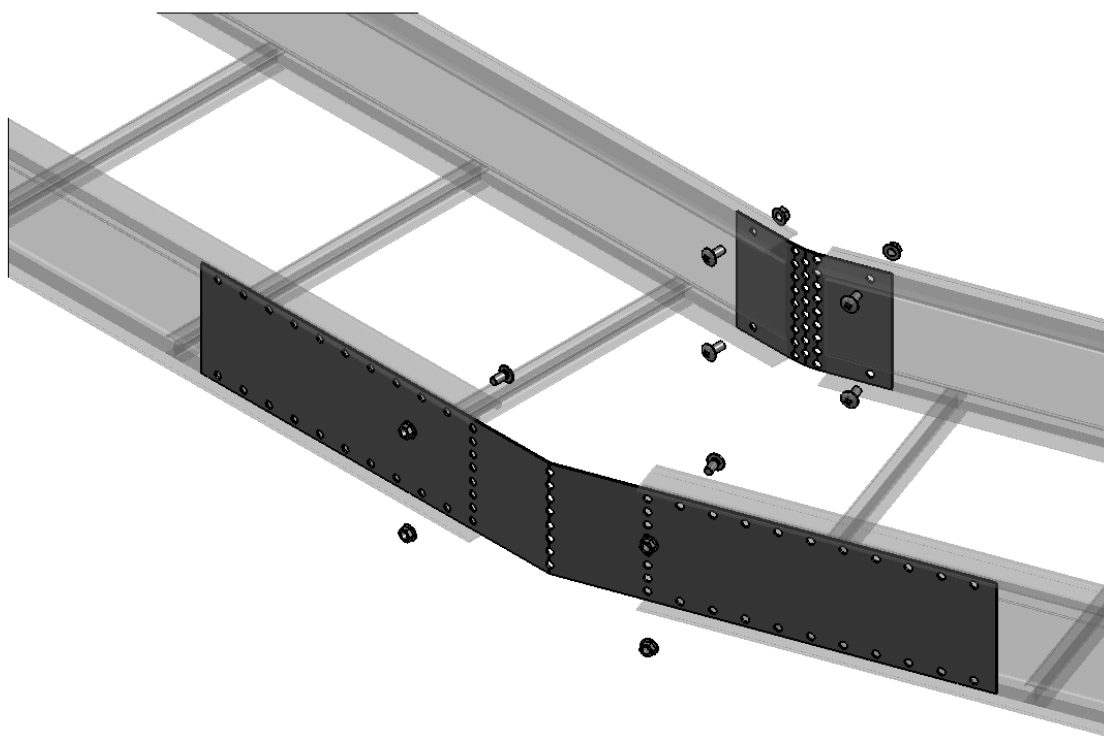

| PART NAME | 'H'   | WEIGHT |
|-----------|-------|--------|
| 4A-HASP-x | 3.625 | 1.843  |
| 5A-HASP-x | 4.625 | 2.289  |
| 6A-HASP-x | 5.625 | 2.736  |
| 7A-HASP-x | 6.625 | 3.182  |
| 4*-HASP-x | 3.500 | 3.773  |
| 5*-HASP-x | 4.500 | 4.814  |
| 6*-HASP-x | 5.438 | 5.788  |
| 7*-HASP-x | 6.250 | 6.632  |

4A THRU 7A (A) REPRESENT ALUMINUM  
 x REPRESENTS HARDWARE: GE or S6  
 \* REPRESENTS (STEEL) MATERIAL/FINISH:  
 G -STEEL/HDGAF (after fab)  
 T - STAINLESS/316

### NOTES:

- BEND PLATES TO APPROPRIATE ANGLE AS NEEDED
- FIELD DRILL OUTER PLATE IF REQUIRED
- TORQUE: 19 FT/LBS
- MEETS CABLE TRAY BONDING REQUIREMENTS (NO BONDING JUMPERS REQUIRED) WHEN TRAY IS NOT USED AS AN EGC
- KIT INCLUDES ONE INSIDE AND OUTSIDE PLATE AND ALL NECESSARY HARDWARE TO COMPLETE SPLICE CONNECTION

**Legrand**  
 8319 State Route 4  
 Mascoutah, IL 62258 USA  
 800-658-4641  
 618-566-3230  
 Fax 618-566-3250  
[www.legrand.us/cablofil](http://www.legrand.us/cablofil)