



UPC Code : 078477433645

Country Of Origin : China



G5362-2TW

Dual Marked Controlled Tamper-Resistant GFCI, White

2 Plug Marked Controlled SmartlockPro GFCI Decora Duplex Receptacle Outlet, Extra Heavy-Duty Industrial Grade, Tamper-Resistant, Power Indication, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding – White

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Grounding : Self-Grounding

Pole : 2

Short Circuit Current Rating : 10kA

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature : -35C to +66C

Material Specifications

Body Material : Polycarbonate

Face Material : PBT

Ground Clips : Brass

Grounding Screw : Plated Steel

Line Contacts : Brass

Shutter Mechanism : Delrin® Acetal

Strap Material : Galvanized Steel

Terminal Clamp : Brass

Terminal Screws : Plated Steel

Mechanical Specifications

Product ID : Ratings are permanently marked on device

Terminal Accom. : 14-10 AWG solid or stranded

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back and Side Wire

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex Receptacle Outlet

Feature : Tamper-Resistant, Power Indication

Function : GFCI

Grade : Extra Heavy-Duty Industrial Specification Grade

NEMA : 5-20R

Standards and Certifications

ANSI : C-73


Applicable Standards : UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

Certification/Listing : UL, CSA, NOM-ANCE

NEMA : WD-1 & WD-6

Warranty

Warranty : 2-Year Limited

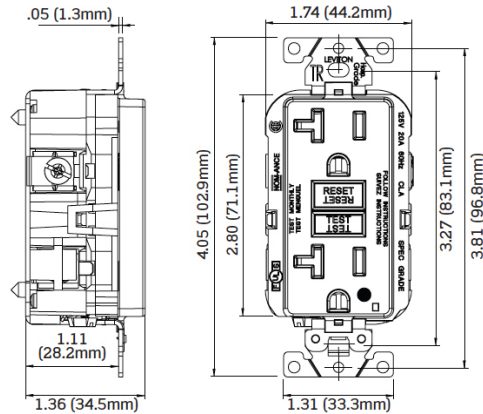

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

