**IEC Pin and Sleeve**

**32A, 100-130V, 2 Pole, 3 Wire**

# Watertight Receptacle

## Features

- UL Type 4X, 12 and IP69k environmental ratings
- Impact and corrosion resistant insulated non-metallic housing
- Watertight neoprene glad seal to prevent water ingress from entering at cable entrance
- Sequential contact engagement to prevent a momentary over-voltage
- Market leading UL witnessed HP ratings

## Ordering Information

| Description | UPC | Catalog Number |
|---|---|---|
| Watertight IEC Pin and Sleeve Receptacle | 783585574516 | **HBL332R4W** |

## Listings

UL Listed, File E146032
CSA Certified File LR280C
UL Classified to IEC 60309-1 IEC 60309-2

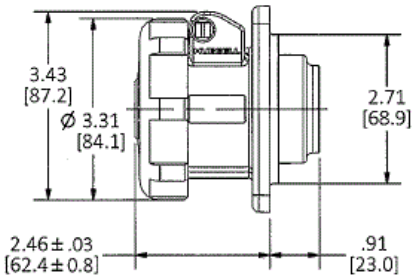


## Specifications

| | |
|---|---|
| Housing | PBT |
| Closure Cover | PBT |
| Sealing Gasket | Solid Neoprene |
| Retainer | High-Impact Thermoset |
| Gaskets | Santoprene |

## Performance

**Electrical**

| | |
|---|---|
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstand 3000V AC |
| Max. Working Voltage | 600V RMS |

**Mechanical**

| | |
|---|---|
| Impact Resistance | Per CSA C22.2 No. 182.1 / UL1682 |
| Product Identification | Identification and ratings are a permanent part of the device housing |
| Terminal Identification | Terminals identified in accordance with North American and IEC conventions |

**Environmental**

| | |
|---|---|
| Flammability | V-0 |
| Ingress Protection | Type 3R, 3RX, 4X and IP68, IP69K |
| Moisture Resistance | IEC 60309-1 |
| Operating Temperatures | Maximum Continuous 75°C; Minimum - 40°C w/o impact |

## Complementary Products

Cover Assemblies

## Online Resources

Customer Sales Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484
Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

Wiring Device-Kellems