

Fiber Raceway Joiners and Slotless Joiners

APPLICATION

Joiners and Slotless Joiners provide a means to connect all Fiber Raceway components to each other and/or ducting. Slotless Joiners are universal and will join the ducting with or without end slots. Regular Joiners are tool-less on assembly when used to connect components and ducting with end slots.

FEATURES

- Available in five sizes
 - 2" x 2"
 - 2" x 4"
 - 4" x 4"
 - 4" x 8"
 - 4" x 12"
- Creates a smooth and firm connection between ducting and components.
- Joiners require slotting tools when used with ducting where the end slots have been removed. No tools are needed to attach ducting with end slots.
- Slotless Joiners are universal and lock tightly into place with any flat head screwdriver.

STANDARDS COMPLIANCE

UL 94 V-0 Material Rating for Flammability
Meets NEBS GR-63-CORE*
UL 2024A Optical Fiber Raceway, Riser Rated

PHYSICAL SPECIFICATIONS

Color: See page two
Material: Noryl Plastic
Dimensions: See page two

DESIGN CONSIDERATIONS

- Manufactured of a fire retardant plastic that is halogen free.
- May be utilized in a system containing copper cable. It is recommended that fiber and copper be stored in separate systems.
- Joiners are "tool-less"
 - Designed to work with ducting and components that have end slots
- Slotless Joiners are "universal"
 - Connects ducting that has been cut down to size where end slots have been removed

WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.leviton.com.

*Testing conducted by an accredited third party



TYPICAL SPECIFICATION

Joiners and Slotless Joiners shall be used to connect raceway and components. Slotless Joiners shall connect raceway ducting with or without end slots. Regular joiners shall be used to snap together all components and ducting with end slots without the use of tools. Components shall be UL rated and manufactured of fire retardant materials.

ELECTRONIC FILES

For CAD files, Typical Specs, or Dimensional Line Art (.DXF, .DWG, MS-DOS.eps or .TXT), visit www.leviton.com.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.leviton.com.

2222 – 222nd St. SE • Bothell, WA 98021 USA
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.





Fiber Raceway Joiners and Slotless Joiners


Part Number
SXJNR-SLX

DIMENSIONAL LINE ART

For Dimensional Line Art (.DXF, .DWG, MS-DOS.eps or .TXT),
log on to www.leviton.com.

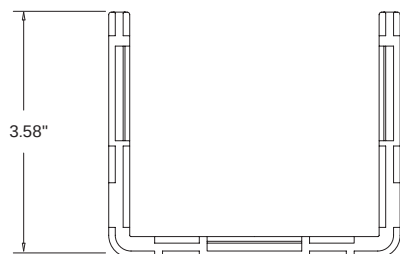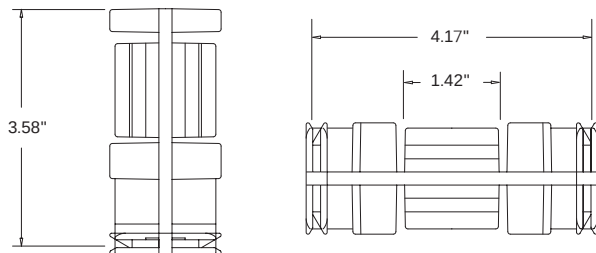

Pictured: Joiner

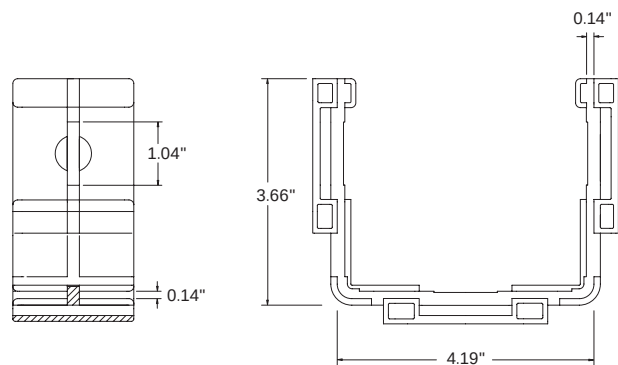

Pictured: Slotless Joiner

JOINERS					
Description	2" x 2"	2" x 4"	4" X 4"	4" x 8"	4" x 12"
Joiner	S2JNR-SLT	SLJNR-SLT	S4JNR-SLT	S8JNR-SLT	
Slotless Joiner			S4JNR-SLS	S8JNR-SLS	SWJNR-SLS

NOTE: Dimensions are listed as height x width. All measurements reflect an approximate conversion from the Metric system.

NOTE: Standard color is yellow. For other colors, replace "S" as the first letter of the part number with O (orange), E, (black), or G (grey). Please contact customer service for pricing and availability of non-standard colors.

ACCESSORIES	
Description	Part No.
End Slot Cut Out Tool (for 2" x 2" and 2" x 4" duct)	SSL0T-050
End Slot Cut Out Tool (for 2" x 4" duct)*	SSL0T-100
End Slot Cut Out Tool (for 4" x 4" and 4" x 8" duct)	SSL0T-200

* NOTE: Must also order SSL0T-200 for 2"x4" duct.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.
Spec sheets and updates are also available at www.leviton.com.



2222 – 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available.