

PVC Coated Form Fittings - LR Form 8

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws




Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

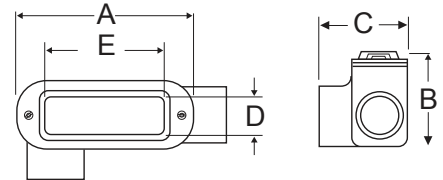

LR Form 8									
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
PV0500LR18	1/2"	16	5.48	1.48	2.20	1.00	3.31	140	PA0500LR19
PV0700LR28	3/4"	21	6.35	1.73	2.35	1.19	3.94	210	PA0700LR29
PV1000LR38	1"	27	7.51	1.98	2.67	1.38	4.56	260	PA1000LR39
PV1200LR48	1-1/4"	35	8.82	2.42	3.20	1.75	5.31	450	PA1200LR49
PV1500LR58	1-1/2"	41	10.67	2.82	4.04	2.13	6.50	620	PA1500LR59
PV2000LR68	2"	53	13.04	3.60	5.04	3.00	8.56	1070	PA2000LR69
PV2500LR78	2-1/2"	63	15.98	4.48	6.73	4.25	10.88	1770	PA2500LR789
PV3000LR88	3"	78	15.98	4.85	6.73	4.25	10.88	1800	PA3000LR889
PV3500LR98	3-1/2"	91	14.73	4.92	6.98	4.50	10.25	2100	PA3500LR989
PV4000LR108	4"	103	14.73	5.42	6.98	4.50	10.25	2400	PA4000LR1089

Calbond

923 Calpipe Road, Santa Paula, CA 93060
Ph: (562) 803.4388 Fax: (310) 885.1894 | calbond.com