


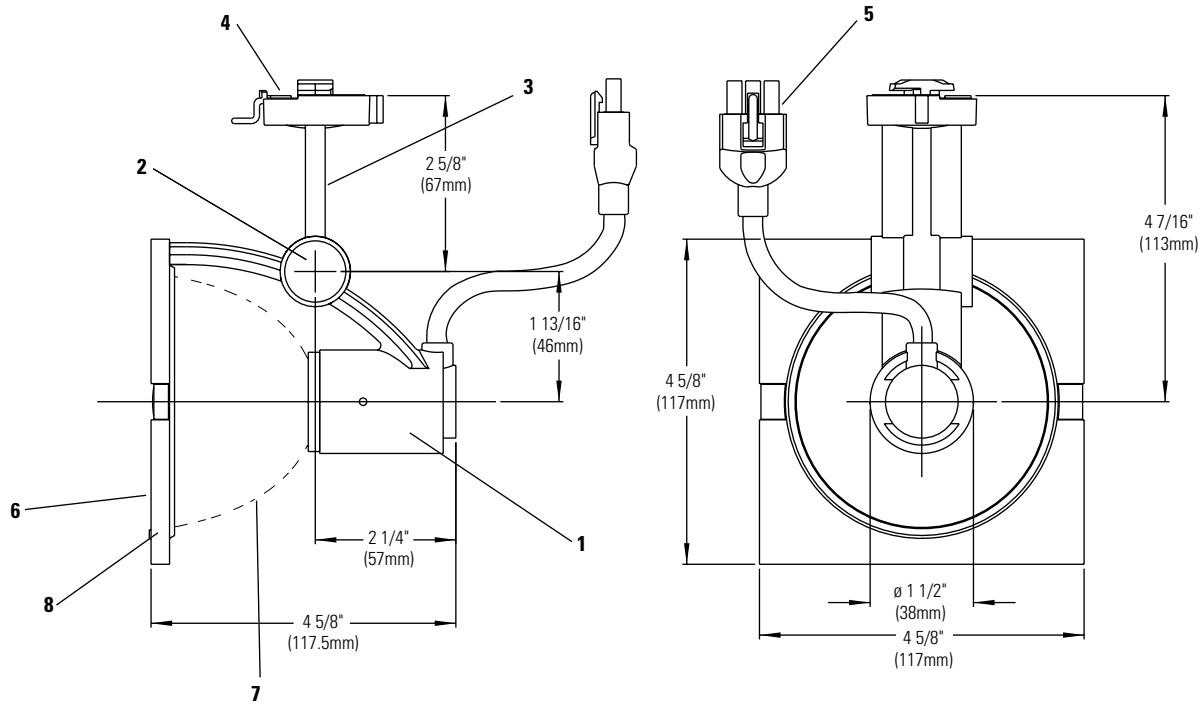

## Ordering Information

| Catalog No.                | Finish                                          | Track Mountings                                                                                                                                                                                | Ballast Module                                                                                                                                                  | Lamp                                                                     | Reflectors                                                      |
|----------------------------|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------|
| 8304WH<br>8304BK<br>8304AL | Matte White<br>Matte Black<br>Metallic Aluminum | All Lytespan® Track systems and Multipoint. All PowerArc™ Modular canopies, extension wands, mounting brackets or pipe clamps. Not compatible with ProSpec® or ATOM®. See ballast for details. | Use one of:<br><b>83B20E</b> <b>83B39M</b><br><b>83B39E</b> <b>83B70M</b><br><b>83B39LE</b> <b>83CY70E</b><br><b>83B70E</b><br><b>83B70SE</b><br><b>83CY39E</b> | T4 or T4.5 Single Ended, G8.5 Base, Clear Ceramic Metal Halide, 70W Max. | Use one of:<br><b>MHT4RS</b><br><b>MHT4RNF</b><br><b>MHT4RF</b> |

## Features

- Housing:** Die cast aluminum body.
- Vertical Pivot:** 0-90° vertical adjustment.
- Horizontal Pivot:** Die cast track adapter with infinite rotation.
- Track Attachment Fitting:** Molded polycarbonate, rotates into track and ballast modules.
- Power Connector:** 5kv rated with insulated pins. Connects to ballast module. Keyed for polarity.
- Safety Lens:** Tempered 1/8" glass. Meets or exceeds U.L. safety requirements for metal halide lamps.
- Reflector:** Interchangeable reflectors available to allow for desired precise beam spread without the need of additional lenses.
- Square Frame:** Die cast aluminum. Accepts Accessory Holders.
- Lamp Holder:** (not shown) G8.5 base, 5kv pulse rated. High temperature ceramic body.

Reflectors sold separately. See **MHT4R S/NF/F** specification sheets.

## Accessories

|                           |                                                    |                                                              |
|---------------------------|----------------------------------------------------|--------------------------------------------------------------|
| <b>83T4AH</b>             | Accessory Holder. Accepts 2 Accessories Max.       | } Compatible with 83B39LE, 83B70E and magnetic ballasts only |
| <b>83T4S</b>              | Snoot Accessory Holder. Accepts 2 Accessories Max. |                                                              |
| <b>ADF3 (3 3/4" dia.)</b> | Color Filters                                      |                                                              |
| <b>AF3 (3 3/4" dia.)</b>  | Diffusion Filter                                   |                                                              |
| <b>AL3HC</b>              | Hex Cell Louver                                    |                                                              |
| <b>83EW18WH, BK, AL</b>   | 18" Extension Wand                                 | }                                                            |
| <b>83EW48WH, BK, AL</b>   | 48" Extension Wand                                 |                                                              |
| <b>83EC72WH, BK</b>       | 6' Extension Cord                                  |                                                              |
| <b>83PCWH, BK</b>         | Pipe Clamp                                         |                                                              |
| <b>83MPTWH, BK</b>        | Mounting Bracket                                   |                                                              |

## Finish

All painted finishes are baked enamel.

## Electrical

See ballast module spec sheet.

## Labels

UL, cUL

## Job Information

## Type:

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Notes:**

Lightolier a Genlyte company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2006 Genlyte Group LLC • E1106