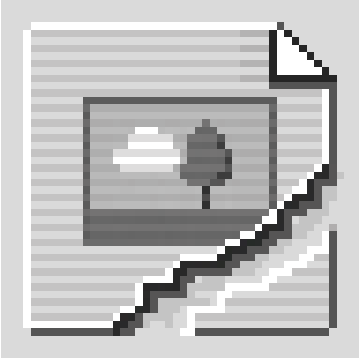

SKU: 26004

UPC: 0783669421231

Features & Benefits:

Description: Heat Shrinkable Tubing, Thin Wall, 1/8in Expanded ID, Conductor Range 20-26, 500ft Spool, Black

Specs

Additional Class Attributes

Container	Spool
Model	Tube
Shrink Ratio	2:1

Dimensions

Cut Length	500 ft
Expanded ID (IN)	0.125
Expanded ID (mm)	3.175
Length (IN)	500
Length (mm)	12700
Recovered ID (IN)	0.062 IN
Recovered Wall Thickness (IN)	0.020 IN

Additional Technical Specifications

Dielectric Strength	600 V/Mil

Material and Finish

Material	Polyolefin

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 1
NEMA Code	0-000-1
UPC Code	78366942123

Testing Standards

CSA File Number	AP-100973-1
CSA Standard	C22.2 No. 198.1
Mil Spec #	AMS-DTL-23053/5 CLASS 1
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation

RUS Listed	Yes
UL / CULUS Specification	UL 224 Recognized
UL File Number	E158587

Environment and Temperature

Flammability Rating	NA
Minimum Shrink Temperature	90°C
Operating Temperature	-55°C to 135°C
Temperature Rating	-55°C to 135°C

Color

Color	Black

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	20 Str - 26 Str
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	20 Sol - 26 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	20 Str - 26 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	20 Sol - 26 Sol

Voltage

Voltage Rating	600 V