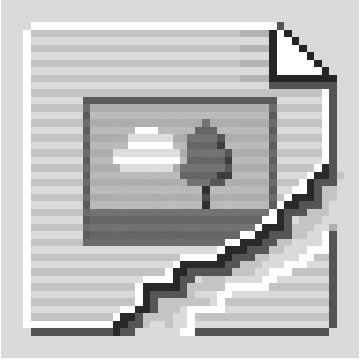

**SKU:** 31123-B10

**UPC:**

**Features & Benefits:**

**Description:**Crimp 'N Seal Fork Terminal, Conductor Range 18-22, #8 Bolt Size, Bag of 10

# Specs

## *Additional Class Attributes*

| | |
|---|---|
| **Conductor Entry** | Funnel wire |
| **Connection** | Compression |
| **Construction Type** | Brazed |
| **Installation Tooling** | NA |
| **Installing Dies** | NA |
| **Insulation Flared End** | Yes |
| **Insulation Grip** | Yes |
| **Mounting Hole Type** | Thru |
| **Number of Conductors** | 1 |
| **Number of Mounting Holes** | 1 |
| **Tongue Type** | Fork |

## *Dimensions*

| | |
|---|---|
| **Height (IN)** | 0 |
| **Height BX (IN)** | 2 |
| **Length (IN)** | 0 |
| **Maximum Wire Insulation Diameter (IN)** | 0.170 |
| **Mounting Bolt/Stud Size (mm)** | 203.2 |
| **Weight (LB)** | 0.445 |
| **Weight BX (LB)** | 4.597 |
| **Width (IN)** | 0 |
| **Width BX (IN)** | 6.1875 |

## *Material and Finish*

| | |
|---|---|
| **Conductor Material** | Copper |
| **Connector Finish** | Tin |
| **Fully Insulated** | No |
| **Insulation** | Polyolefin |
| **Material** | Copper |

## *General*

| | |
|---|---|
| **Bag Quantity** | 10 |
| **Carton Quantity Description** | STD PACK QTY 10 |
| **Dual Rated** | No |
| **NEMA Code** | S-588-1 |

| | |
|---|---|
| **UPC Code** | 78366999827 |

## Bolt and Screw Sizes

| | |
|---|---|
| **Mounting Bolt/Stud Size** | #8 |

## Testing Standards

| | |
|---|---|
| **Prop65 Compliance** | WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov |
| **UL Control Number** | 8M24 |
| **UL File Number** | E158587 |

## Environment and Temperature

| | |
|---|---|
| **Temperature Rating** | 90°C |

## Color

| | |
|---|---|
| **Color** | Silver |
| **Color Code** | Red |

## Conductor Ranges

| | |
|---|---|
| **Conductor Range AL Solid (Secondary, tap, load)** | NA |
| **Conductor Range AL Stranded (Primary, run, main, line)** | NA |
| **Conductor Range AL Stranded (Secondary, tap, load)** | NA |
| **Conductor Range CU Solid (Primary, run, main, line)** | 18 Sol - 22 Sol |
| **Conductor Range CU Solid (Secondary, tap, load)** | NA |
| **Conductor Range CU Stranded (Primary, run, main, line)** | 18 Str - 22 Str |
| **Conductor Range CU Stranded (Secondary, tap, load)** | NA |
| **Conductor Range AL Solid (Primary, run, main, line)** | NA |

## Voltage

| | |
|---|---|
| **Voltage Rating** | 600 V |