


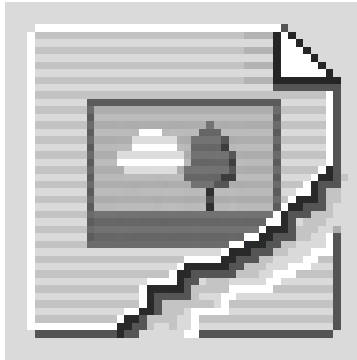

SKU: 31414-B10

UPC:

Features & Benefits:

Description: Crimp 'N Seal Ring Terminal, Conductor Range 10-12, #10 Bolt Size, Bag of 10

Specs

Additional Class Attributes

Conductor Entry	Funnel wire
Connection	Compression
Construction Type	Brazed
Installation Tooling	NA
Installing Dies	NA
Insulation Flared End	Yes
Insulation Grip	Yes
Mounting Hole Type	Thru
Number of Conductors	1
Number of Mounting Holes	1
Tongue Type	Ring

Dimensions

Height (IN)	0
Height BX (IN)	2
Length (IN)	0
Maximum Wire Insulation Diameter (IN)	0.240
Mounting Bolt/Stud Size (mm)	254
Weight (LB)	0.115
Weight BX (LB)	1.297
Width (IN)	0
Width BX (IN)	6.1875

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Fully Insulated	No
Insulation	Polyolefin
Material	Copper

General

Bag Quantity	10
Carton Quantity Description	STD PACK QTY 10
Dual Rated	No
NEMA Code	S-588-1

Bolt and Screw Sizes

Mounting Bolt/Stud Size	#10
-------------------------	-----

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	8M24
UL File Number	E158587

Environment and Temperature

Temperature Rating	90°C
--------------------	------

Color

Color	Silver
Color Code	Yellow

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	10 Sol - 12 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	10 Str - 12 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA

Voltage

Voltage Rating	600 V
----------------	-------