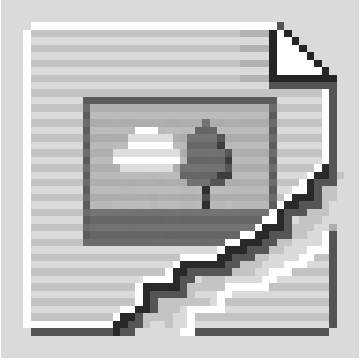

**SKU:** 44511-B10

**UPC:**

**Features & Benefits:**

**Description:**ILSCON Fork Terminal, Conductor Range 14-16, #6 Bolt Size, Vinyl Insulated, Blue Color Code, Pack of 10

# Specs

## *Additional Class Attributes*

| | |
|---|---|
| **Conductor Entry** | Funnel wire |
| **Connection** | Compression |
| **Construction Type** | Brazed |
| **Insulation Flared End** | Yes |
| **Insulation Grip** | Yes |
| **Mounting Hole Type** | Thru |
| **Number of Conductors** | 1 |
| **Tongue Type** | Fork |

## *Dimensions*

| | |
|---|---|
| **Height (IN)** | 0 |
| **Height BX (IN)** | 2 |
| **Length (IN)** | 0 |
| **Maximum Wire Insulation Diameter (IN)** | 0.175 |
| **Mounting Bolt/Stud Size (mm)** | 152.4 |
| **Weight (LB)** | 0.115 |
| **Weight BX (LB)** | 1.297 |
| **Width (IN)** | 0 |
| **Width BX (IN)** | 6.1875 |

## *Material and Finish*

| | |
|---|---|
| **Conductor Material** | Copper |
| **Connector Finish** | Tin |
| **Insulation** | Vinyl |
| **Material** | Copper |

## *General*

| | |
|---|---|
| **Bag Quantity** | 10 |
| **Carton Quantity Description** | STD PACK QTY 10 |
| **Dual Rated** | No |
| **NEMA Code** | S-588-3 |
| **UPC Code** | 78366944324 |

## Bolt and Screw Sizes

| | |
|---|---|
| **Mounting Bolt/Stud Size** | #6 |

## Testing Standards

| | |
|---|---|
| **Prop65 Compliance** | WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov |
| **UL Control Number** | NA |
| **UL File Number** | NA |

## Color

| | |
|---|---|
| **Color** | Silver |
| **Color Code** | Blue |

## Conductor Ranges

| | |
|---|---|
| **Conductor Range AL Solid (Secondary, tap, load)** | NA |
| **Conductor Range AL Stranded (Primary, run, main, line)** | NA |
| **Conductor Range AL Stranded (Secondary, tap, load)** | NA |
| **Conductor Range CU Solid (Primary, run, main, line)** | 14 Sol - 16 Sol |
| **Conductor Range CU Solid (Secondary, tap, load)** | NA |
| **Conductor Range CU Stranded (Primary, run, main, line)** | 14 Str - 16 Str |
| **Conductor Range CU Stranded (Secondary, tap, load)** | NA |
| **Conductor Range AL Solid (Primary, run, main, line)** | NA |

## Voltage

| | |
|---|---|
| **Voltage Rating** | 600 V |

## Environment and Temperature

| | |
|---|---|
| **Halogen Free** | No |
| **Temperature Rating** | 90°C |