




SKU: CDT-399-8

UPC: 0783669420500

Features & Benefits:

Description:Permaground Copper Grounding H-Tap, Double Tab, Main Conductor Range 4-6 Sol, Tap Range 4-8 Sol

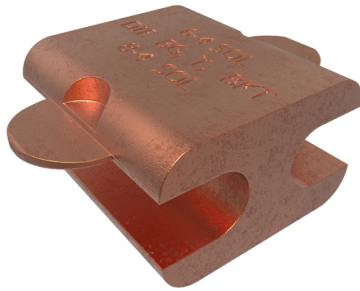

Specs

Additional Class Attributes

Barrel Marking	Hard
Fixing Type	NA
ILSCOs Die Index Number	NA
Installing Dies	BG

Dimensions

Height (IN)	0.74
Height BX (IN)	2
Height (mm)	18.796
Length (IN)	0.814
Length (mm)	20.6756
Weight (LB)	0.05
Weight BX (LB)	1.397
Width (IN)	0.463
Width BX (IN)	6.188
Width (mm)	11.7602

Material and Finish

Conductor Material	Copper
Connector Finish	Bare
Insulation	NA
Material	Copper

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 25
Direct Burial	Yes
Dual Rated	No
NEMA Code	0-000-1
UPC Code	78366942050



Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

Testing Standards

CSA File Number	NA
Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	8M24
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E158587

Environment and Temperature

Temperature Rating	NA
--------------------	----

Color

Color	Copper
-------	--------

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	4 Sol - 6 Sol
Conductor Range CU Solid (Secondary, tap, load)	4 Sol - 8 Sol
Conductor Range CU Stranded (Primary, run, main, line)	6 Str
Conductor Range CU Stranded (Secondary, tap, load)	6 Str
Conductor Range AL Solid (Primary, run, main, line)	NA