


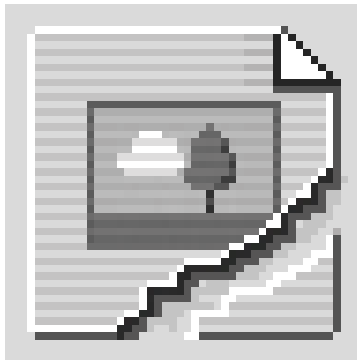

SKU: CH-34

UPC: 0783669010374

Features & Benefits:

Description: Permaground Bronze 3/4in Conduit Hub, Conductor Range 2/0-10 Sol

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	1
Wire Orientation	Parallel

Dimensions

Drive Size Main	NA
Height (IN)	0
Height BX (IN)	6
Length (IN)	0
Weight (LB)	0.175
Width (IN)	0
Width BX (IN)	8

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Bronze

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

Bolt and Screw Sizes

Number of Wire Binding Screws per Port	1
Wire Binding Screw Size	NA

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 10
Direct Burial	No
Dual Rated	No



NEMA Code

S-573-2

UPC Code

78366901037

Testing Standards

Prop65 Compliance

WARNING: Cancer and Reproductive Harm -
www.P65warnings.ca.gov

UL Control Number

8M24

UL / CULUS Specification

UL 467 Listed

UL File Number

E207816

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load) NA

Conductor Range AL Stranded (Primary, run, main, line) NA

Conductor Range AL Stranded (Secondary, tap, load) NA

Conductor Range CU Solid (Primary, run, main, line) 10 Sol

Conductor Range CU Solid (Secondary, tap, load) NA

Conductor Range CU Stranded (Primary, run, main, line) 2/0 Str - 10 Str

Conductor Range CU Stranded (Secondary, tap, load) NA

Conductor Range AL Solid (Primary, run, main, line) NA

Conduit Hub Size 3/4