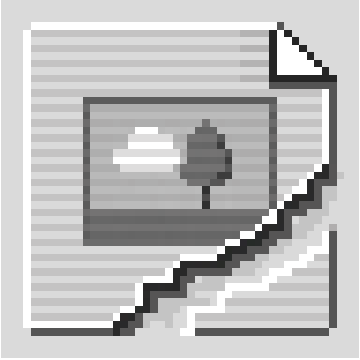

SKU: GT-4

UPC: 0783669004878

Features & Benefits:

Description: Permaground Copper Ground Clamp, Conductor Range 4-8 Sol, 2 Conductors, Pipe Size 3/8in, Ground Rod Sizes 5/8 to 3/4in, Perpendicular Orientation, UL

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	2
Number of Ports / Wireways	2
Wire Orientation	Perpendicular

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	4 Str - 8 Str
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	4 Sol - 8 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	4 Str - 8 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	4 Sol - 8 Sol
Ground Rod Size	5/8
NPS/IPS Pipe Size	3/8

Dimensions

Drive Size Main	3/8
Drive Type Main	External Hex
Height (IN)	2.125
Height BX (IN)	6.5
Length (IN)	1.625
Weight (LB)	0.426
Weight BX (LB)	1.704
Width (IN)	1.625
Width BX (IN)	12.75

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Copper

Additional Technical Specifications

Conductor Type	Solid

Bolt and Screw Sizes

Clamping Bolt Size	1/4
Number of Wire Binding Screws per Port	0
Wire Binding Screw Size	NA

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 3
Direct Burial	Yes
Dual Rated	No
NEMA Code	0-000-1
UPC Code	78366900487

Testing Standards

CSA File Number	NA
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	8M24
UL / CULUS Specification	UL/cUL 467 Listed
UL File Number	E158587