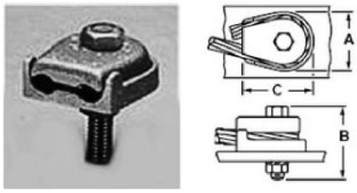

Fig. 3

SKU: GWL-4

UPC: 0783669993028

Features & Benefits:

Description: Permaground Copper Ground Clamp, Conductor Range 2/0-3, 1 Conductor, 1 Bolt, 1/2in Bolt Size, UL

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	1
Number of Ports / Wireways	1
Wire Orientation	Parallel

Dimensions

Drive Size Main	1/2
Drive Type Main	External Hex
Height (IN)	1.875
Height BX (IN)	3
Length (IN)	2.125
Weight (LB)	0.375
Weight BX (LB)	1.5
Width (IN)	1.813
Width BX (IN)	10.5

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA
Material	Copper

Additional Technical Specifications

Conductor Type	Stranded

Bolt and Screw Sizes

Clamping Bolt Size	5/16
Mounting Bolt/Stud Size	5/16
Number of Wire Binding Screws per Port	0
Wire Binding Screw Size	NA

nVent ILSCO
4701 Creek Rd, Suite 110
CINCINNATI, OH 45227
513-533-6200
800-776-9775

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 3
Direct Burial	Yes
Dual Rated	No
NEMA Code	0-000-1
UPC Code	78366999302

Testing Standards

Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	8M24
UL / CULUS Specification	UL 467 Listed
UL File Number	E158587

Color

Color	Copper

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	2/0 Str - 3 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA